


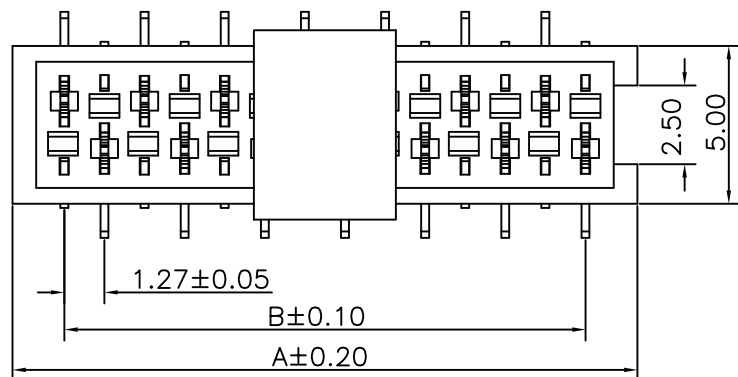

Pos	A	B	C
4	7.00	3.81	5.60
6	9.54	6.35	8.14
8	12.08	8.89	10.68
10	14.62	11.43	13.22
12	17.16	13.97	15.76
14	19.70	16.51	18.30
16	22.24	19.05	20.84
18	24.78	21.59	23.38
20	27.32	24.13	25.92
22	29.86	26.67	28.46
24	32.40	29.21	31.00
26	34.94	31.75	33.54

Specifications:

Current rating:1.0A AC,DC

Voltage rating:250V AC, DC

Contact resistance:20m ohm Max

Insulation resistance:1000M ohm Min

Withstanding voltage:AC 500V AC/minute




Operating Temperature:-40°C ~ +105°C

Materials:

Insulator:High Temp Plastic UL94V-0

Contact material:Phosphor Bronze

Finish:Tin Plated

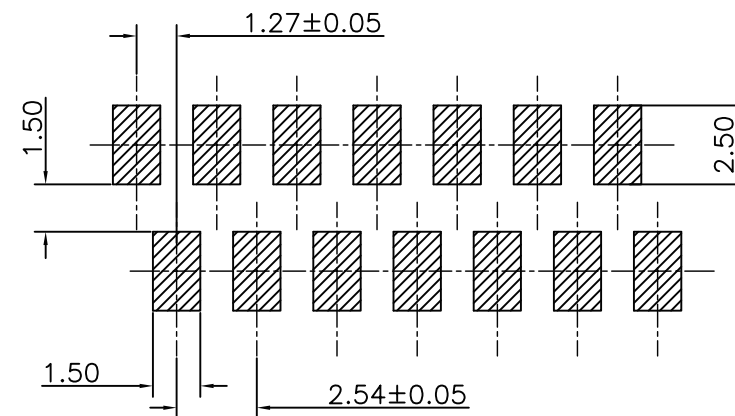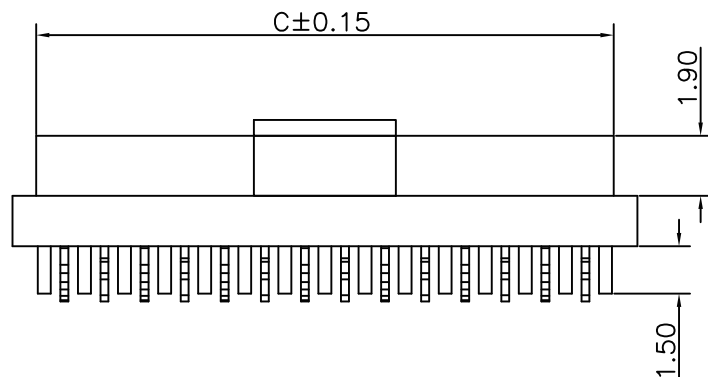

PCB Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION




X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION


MIM-SVCR-xx-LF
SERIES
LEADFREE
04~26WAY
REEL
CAP
180°SMT
FEMALE

DESCRIPTION: 2.54mm PCB Connector SMD Type

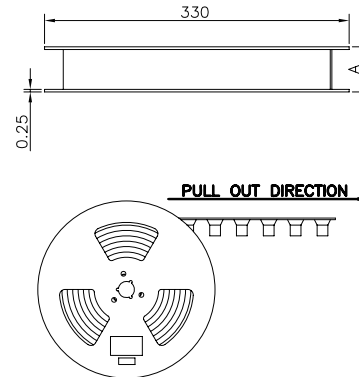


Note:



- 1.All dimensions meet EIA-481-3 requirements.
- 2.Material : Black Conductive Polystyrene Alloy
100% recyclable.
- 3.Thickness : 0.40 ± 0.05 mm
- 4.Component load per 13" reel :800 pcs.
- 5.CARTON SIZE:350*350*296(MM)

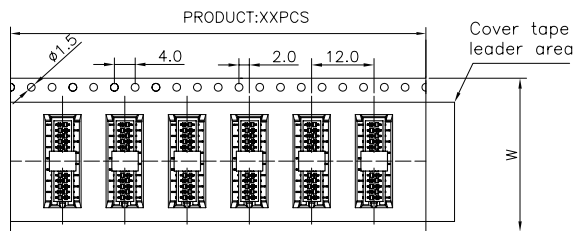

For Reel width (dimension W)16,24mm ,Single row hole

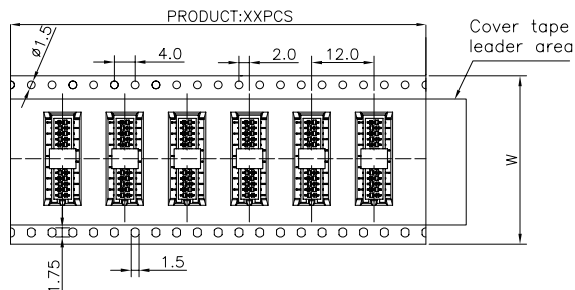

For Reel width (dimension W)32,44,56,72mm ,Double rows hole

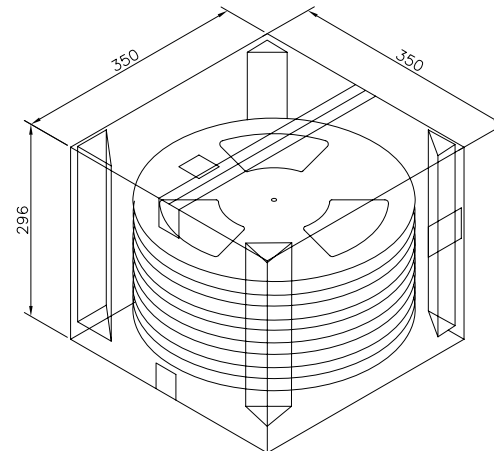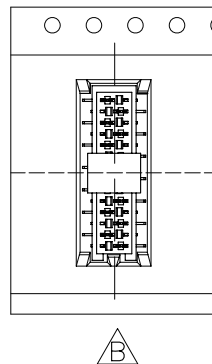

Pin No	W	A	PCS/R	R/CTN	Q'TY
04	24	29	800	8	800*8
06	24	29	800	8	800*8
08	24	29	800	8	800*8
10	24	29	800	8	800*8
12	32	37	800	6	800*6
14	32	37	800	6	800*6
16	44	49	800	5	800*5
18	44	49	800	5	800*5
20	44	49	800	5	800*5
22	44	49	800	5	800*5
24	56	61	800	4	800*4
26	56	61	800	4	800*4

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MIM-SVCR-xx-LF
SERIES
LEADFREE
04-26WAY
REEL
CAP
180°SMT
FEMALE

DESCRIPTION: 2.54mm PCB Connector SMD Type Packing List