
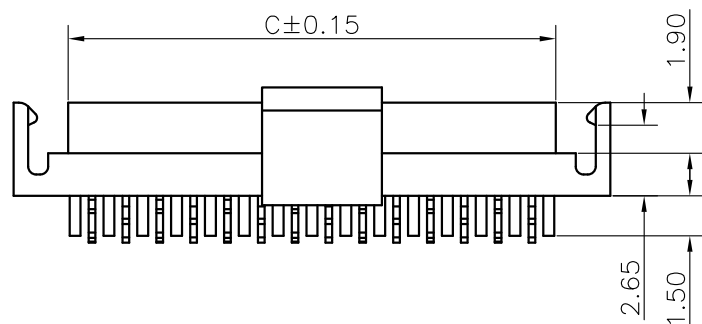
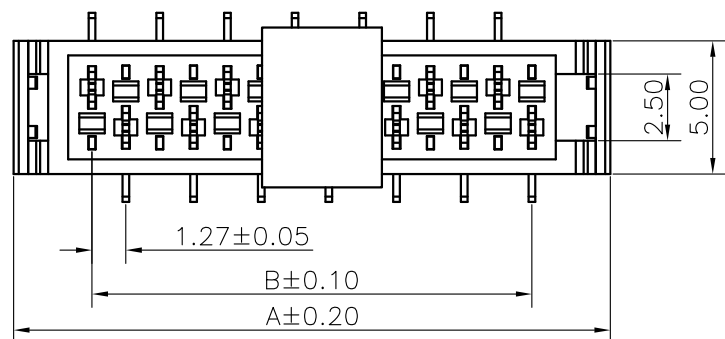


Specifications

Current Rating:1.0A AC/DC
Voltage Rating:30V AC/DC
Contact Resistance:20m Ohm. Max.
Insulation Resistance:1,000M Ohm. Min.
Withstanding Voltage:500V AC For One Minute
Operating Temperature Range:-40°C ~ +105°C
Material And Finish
Insulator:High Temp. Plastic(Nylon46 UL94V-0)
Insulator Color:Red
Contact:Phosphor Bronze
Plated:Tin Plated
Package:800Pcs/Reel

Pos	A	B	C	Pos	A	B	C
4	9.70	3.81	5.60	16	24.94	19.05	20.84
6	12.24	6.35	8.14	18	27.48	21.59	23.38
8	14.78	8.89	10.68	20	30.02	24.13	25.92
10	17.32	11.43	13.22	22	32.56	26.67	28.46
12	19.86	13.97	15.76	24	35.10	29.21	31.00
14	22.40	16.51	18.30	26	37.64	31.75	33.54

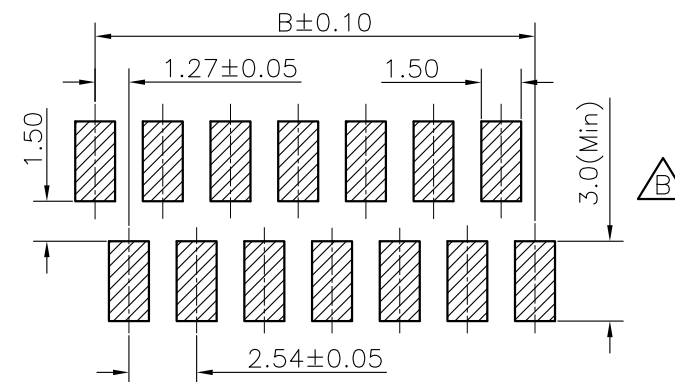

PCB Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION



X, ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±

照片框


ORDER INFORMATION

MIM-SVLCR-xx-LF
SERIES
LEADFREE
04~26WAY
REEL
CAP
LATCH
180°SMT
FEMALE


DESCRIPTION: 2.54mm IDC Socket SMD Type






MIM-SVLCR-xx

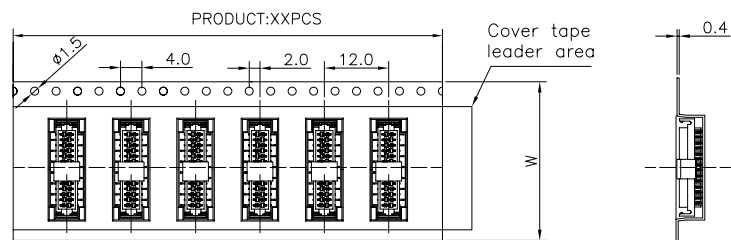

For Reel width (dimension W)16,24mm ,Single row hole

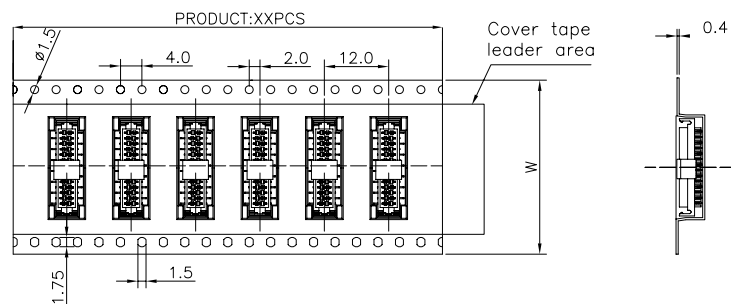

For Reel width (dimension W)32,44,56,72mm ,Double rows hole

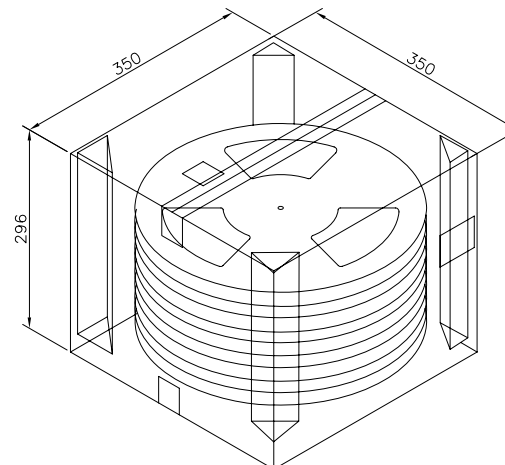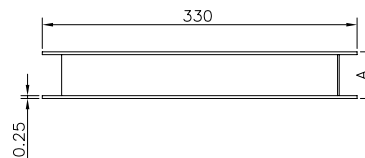

Note:

- 1.All dimensions meet EIA-481-3 requirements.
- 2.Material : Black Conductive Polystyrene Alloy
100% recyclable.
- 3.Thickness : 0.40±0.05mm
- 4.Component load per 13" reel :800 pcs.
- 5.CARTON SIZE:350*350*296(MM)



Pin No	W	A	PCS/R	R/CTN	Q'TY
4	24	29	800	8	8 * 800
6	24	29	800	8	8 * 800
8	32	37	800	7	7 * 800
10	32	37	800	7	7 * 800
12	32	37	800	7	7 * 800
14	44	49	800	5	5 * 800
16	44	49	800	5	5 * 800
18	44	49	800	5	5 * 800
20	44	49	800	5	5 * 800
22	44	49	800	5	5 * 800
24	56	61	800	4	4 * 800
26	56	61	800	4	4 * 800

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MIM-SVLCR-xx-LF
SERIES
LEADFREE
04~26WAY
REEL
CAP
LATCH
180°SMT
FEMALE

DESCRIPTION: 2.54mm IDC Socket SMD Type Packing List