
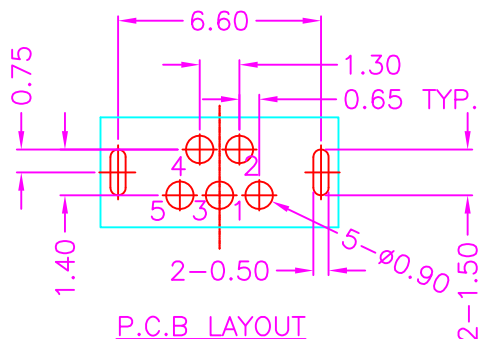

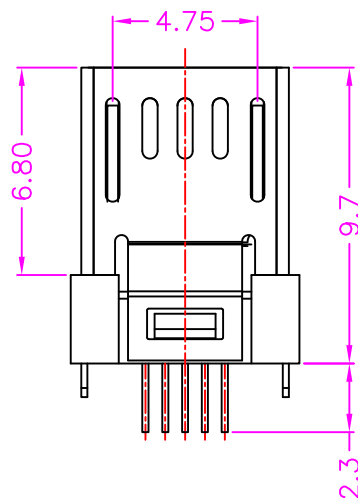

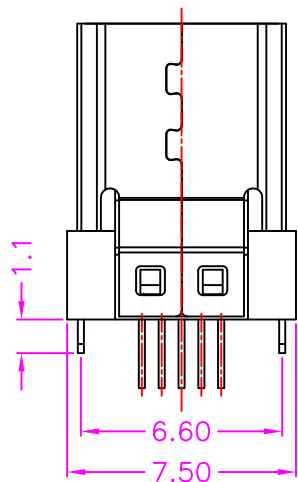




P.C.B. LAYOUT
TOP VIEW ± 0.05

MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0)
SHELL: STAINLESS STEEL, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATING ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, ± 0.40

CHECKED BY GENIUS

.X, ± 0.30

UNIT / mm

SCALE 1 : 1

.XX, ± 0.20

DATE

.XXX, ± 0.10

ANG $\pm 1^{\circ}$

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

MISB-PDM1A-5B-LF
SERIES | LEADFREE
5 PIN B TYPE
FRONT METAL FOOT
DIP 180°
MALE

DESCRIPTION: MICRO USB B TYPE, VERTICAL TYPE, METAL SHIELD PLUG

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com