


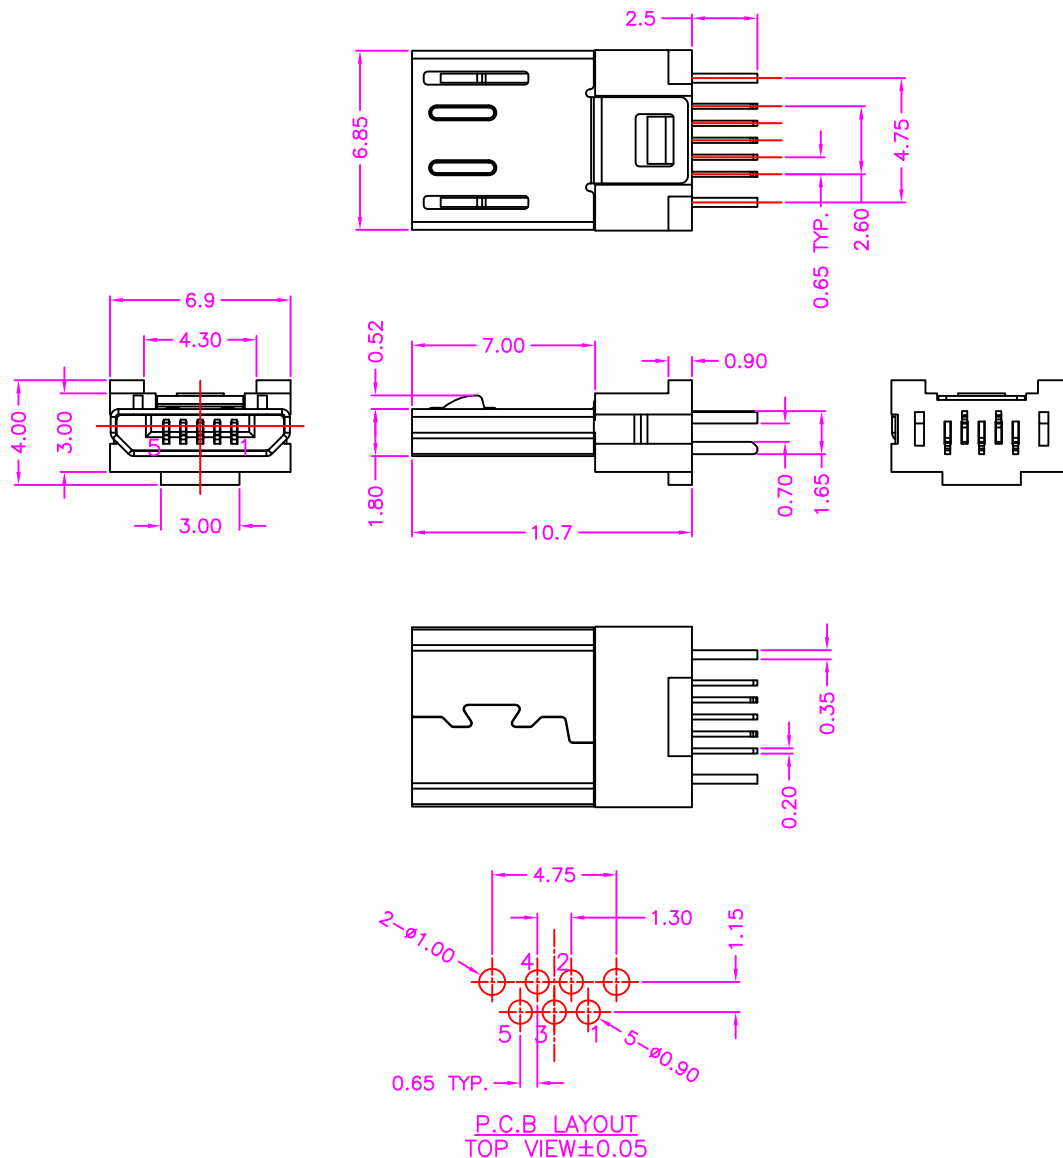

## MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0), BLACK

SHELL: STEEL, NICKEL PLATING

TERMINAL: COPPER ALLOY, GOLD PLATING ON CONTACT AREA  
TIN PLATING ON SOLDER TAIL

## SPECIFICATION


CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX

DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE

CONTACT RESISTANCE: 30m OHMS MAX

INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V

OPERATION TEMPERATURE: -25°C~+85°C

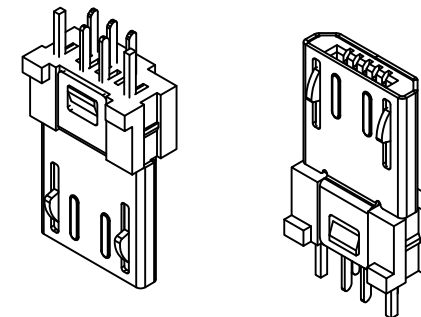

**RoHS Compliant**

TOLERANCES ARE

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ±

SIZE A4

PPOJECTION

照片框

## ORDER INFORMATION

MISB-PDM1B-5B-LF

SERIES

LEADFREE

5 PIN B TYPE

REAR METAL FOOT

DIP 180°

MALE

DESCRIPTION: MICRO USB B TYPE, VERTICAL TYPE, METAL SHIELD PLUG

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com