

备注:

1.材质:

1-1. 塑胶件: LCP,UL 94V-0,颜色:黑色.

1-2. 端子: 磷铜,镍底50u"~100u".接触区镀金1u"MIN.  
焊接区镀雾锡80u"~120u".

1-3. 外壳: 不锈钢,整体镀可焊镍50u"~100u".

2.电气特性:

2-1. 额定电压: 20V AC MAX.

额定电流: 1.5A MAX.

2-2. 接触阻抗: 30m<sub>Ω</sub> MAX.

2-3. 绝缘阻抗: 1000M<sub>Ω</sub> MIN.

2-4. 耐电压: 500V AC FOR 1 MINUTE.


2-5. 操作温度: -30℃~+85℃

3.机械特性:

3-1. 插入力: 35N MAX.

3-2. 拔出力: 3N MIN.

4.耐久: 10000次

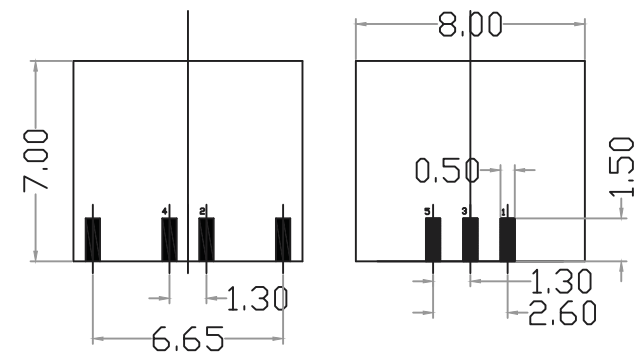

RECOMMENDED P.C.B. LAYOUT (T:0.8mm)

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.25

CHECKED BY GENIUS

.X ± 0.20

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ± 0.10

ANG ±

SIZE A4

P PROJECTION

照片框

ORDER INFORMATION

MISB-PE08-5B-LF

SERIES | LEADFREE

5 PIN B TYPE

EDGE 0.8mm

MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: