
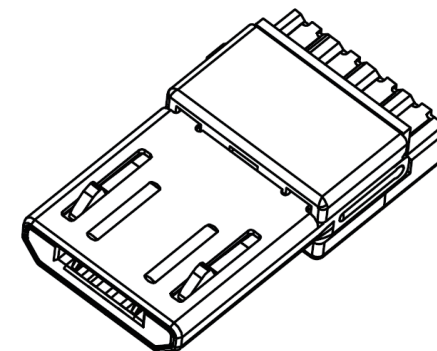


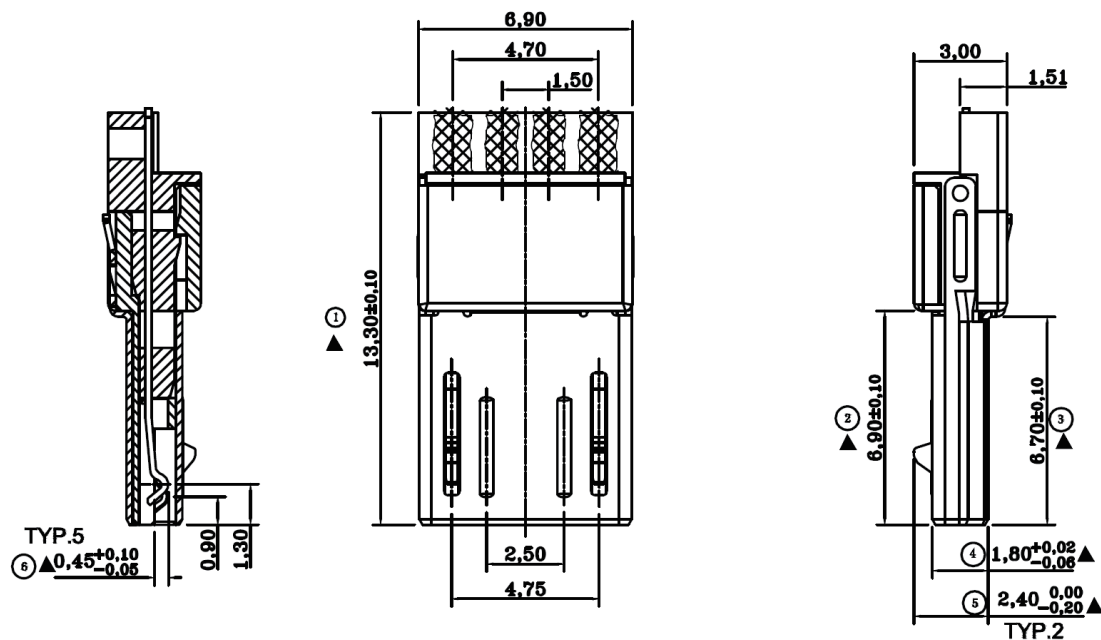

Note:

1. Material:

- 1.1 Housing: LCP GLASS FIBRE, UL94v-0
- 1.2 Contact-1: copper alloy, C5191 T=0.20mm
- 1.3 Contact-2: copper alloy, SUS304 T=0.40mm
- 1.4 Shell: copper alloy, C2680 T=0.20mm

2. Specification:


- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding
voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 50 mW Max.
- 2.4 Insulation resistance: 100 MW Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min. 0.81~2.05
Kgf Min. after 10000 insertion/extraction cycles
- 2.7 Temperature range: -30° C~80° C

3. 电镀:

- 3.1 SHELL: 镀镍80u"-120u"
- 3.2 CONTACT: 镍底50u" 镀锡100u" 接触部分按客户要求Xu";

4. 标"▲"为重点检验尺寸;

5. 未标示公差请查询公差表.

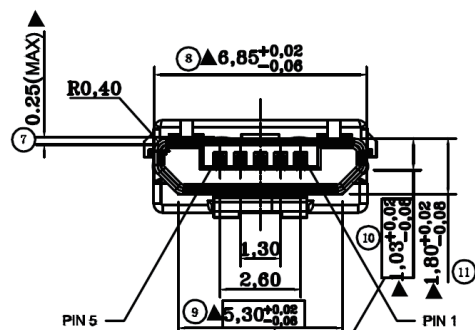

此尺寸以外壳外径量测

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

MISB-PM-5B4-LF

SERIES

LEADFREE

5P4C B TYPE

MOLDING

MALE

DESCRIPTION: MICRO USB 5P MALE (前五後四)