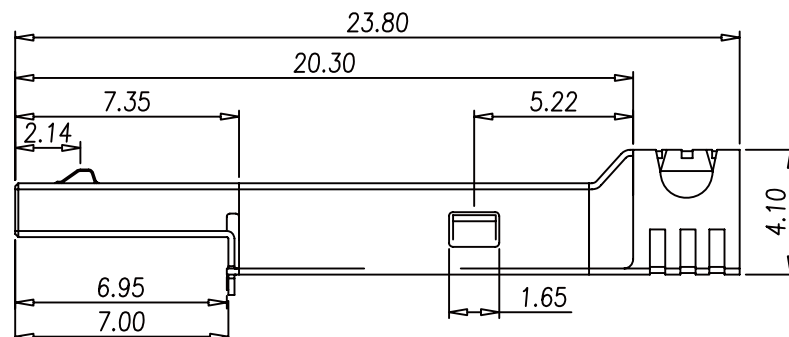
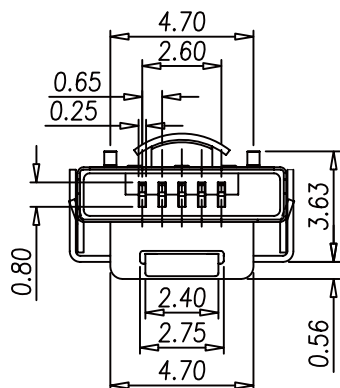
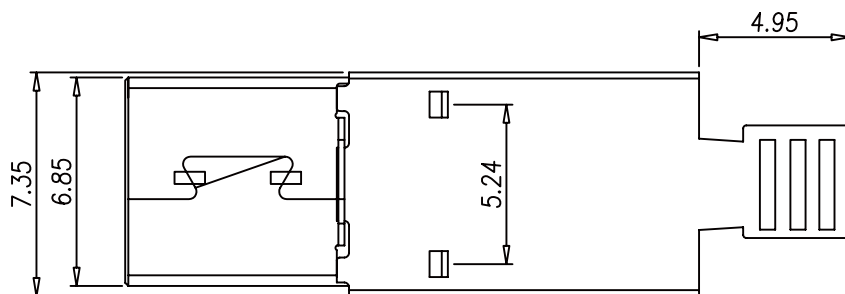


NOTE:

1.SAFETY:


- 1-1.RATING: 0.5A/250Vac.
- 1-2.CONTACT RESISTANCE: 30mOhm MAX.
- 1-3.INSULATION RESISTANCE: 100Mohm MIN.
- 1-4.DIELECTRIC WITHSTANDING VOLTAGE: 100Vac/1minute.
- 1-5.DURABILITY: 10,000cycles.

2.MATERIAL:

- 2-1.PIN:PHOSPHOR BRONZE.
- 2-2.HOUSING:LCP UL 94-V0 rated
- 2-3.LATCH:STAINLESS #301
- 2-4.SHELL:STAINLESS #301

3.PLATING:

- 3-1.PIN:GOLD FLASH MIN ON CONTACT AREA.



BOM	
5	CONTACT
2	SHELL
1	HOUSING
數量	零件

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MISB-PS-5A-LF
SERIES
LEADFREE
5 PIN A TYPE
SOLDER
MALE

DESCRIPTION: MICRO USB 5PATYPE MALE SOLDER