



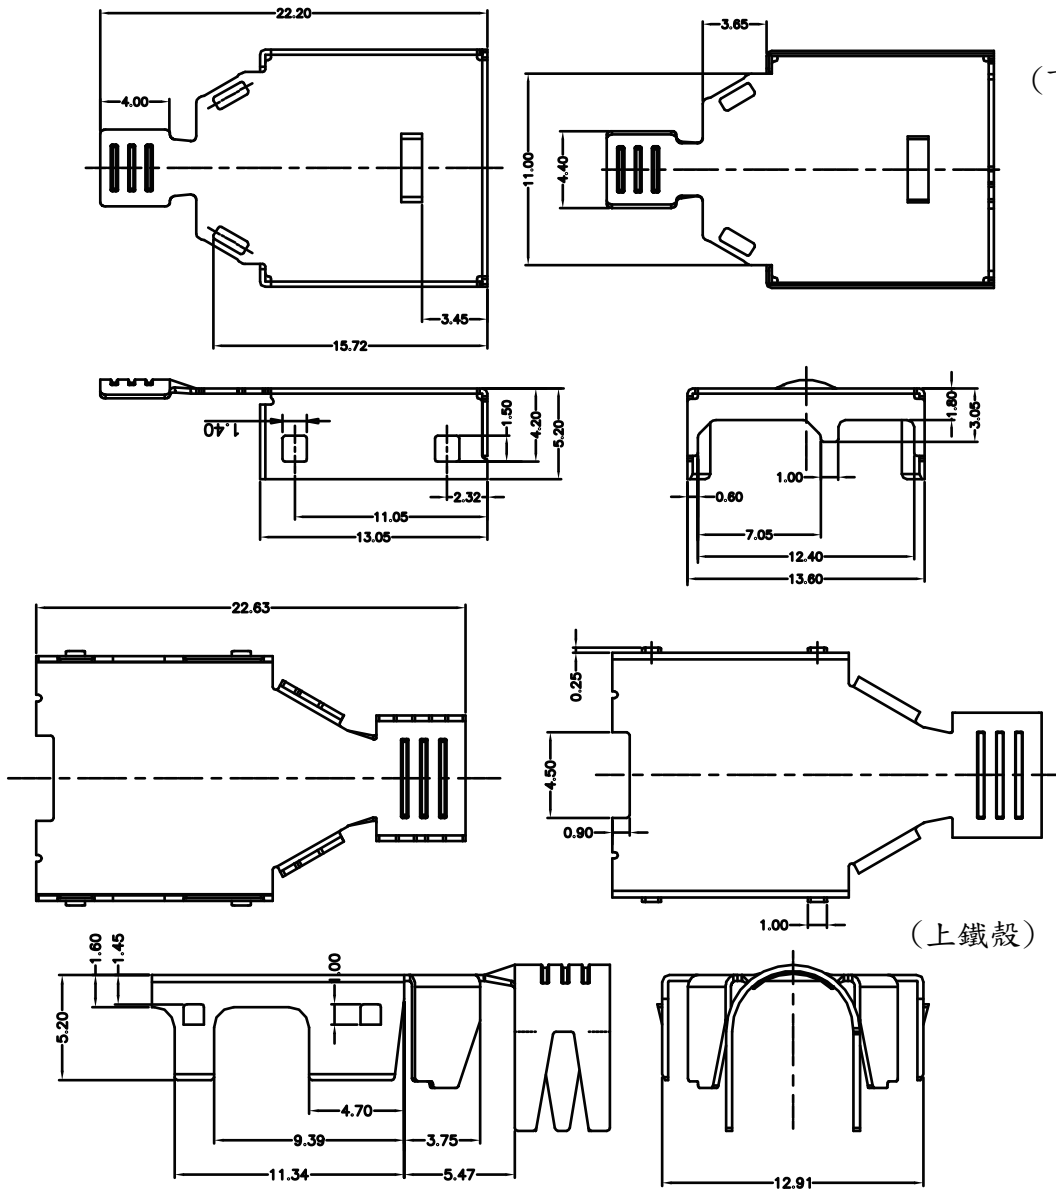

(下鐵殼)

(上鐵殼)

主體

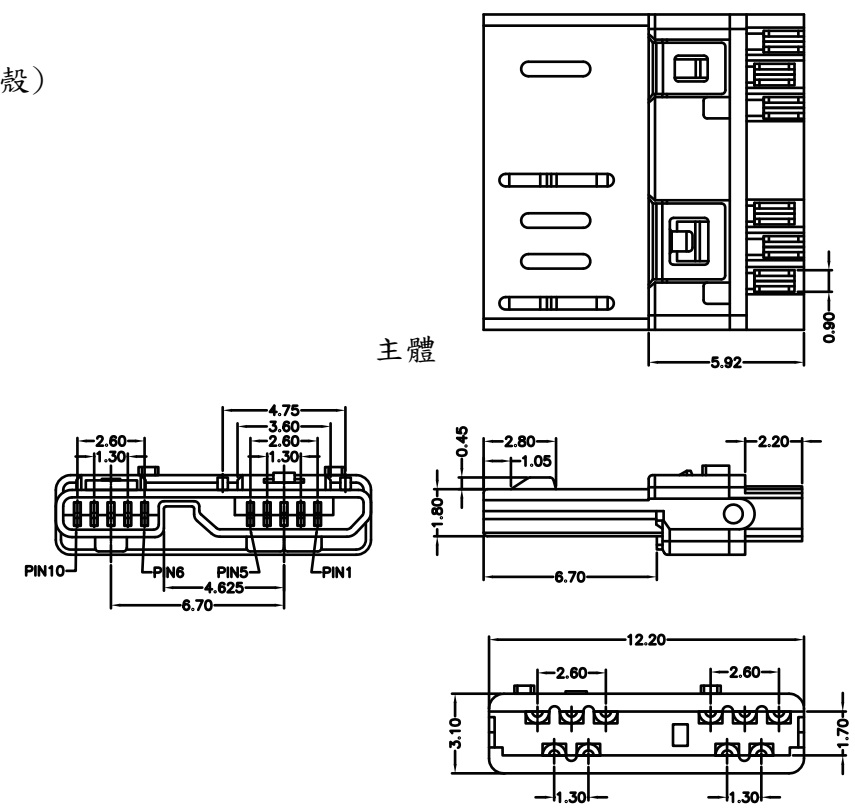

MATERIAL:

- 1.HOUSING: THERMOPLASTIC,PANTONE 360C COLOR,UL94V-0
- 2.SHELL: COPPER ALLOY,NICKEL PLATING
- 3.CONTACT:COPPER ALLOY,GOLD FLASH FOR CONTACT AREA AND TINNED FOR SOLDER TAIL
- 4.TOP AND BOTTOM COVER:STEEL,NICKEL PLATING

ELECTRICAL:

- 1.CONTACT CURRENT RATING: 1.5A Min.
- 2.VOLTAGE RATING : 40V AC(RMS)
- 3.CONTACT RESISTANCE : 30 MILIOHMS MAX.
- 4.MATING FORCE:35N Max.
- 5.UNMATING FORCE:10N Min.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com


RoHS Compliant

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE
SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

MISB-PSGR-10B-LF
SERIES
LEADFREE
10 PIN B TYPE
GREEN
SOLDER
MALE

DESCRIPTION: MICRO USB 10B(M) MOLDING TYPE