

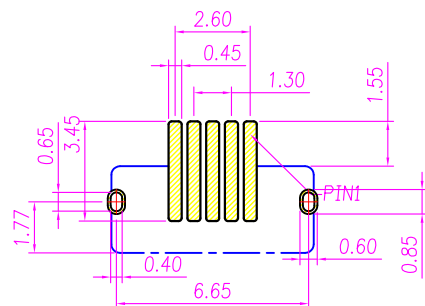
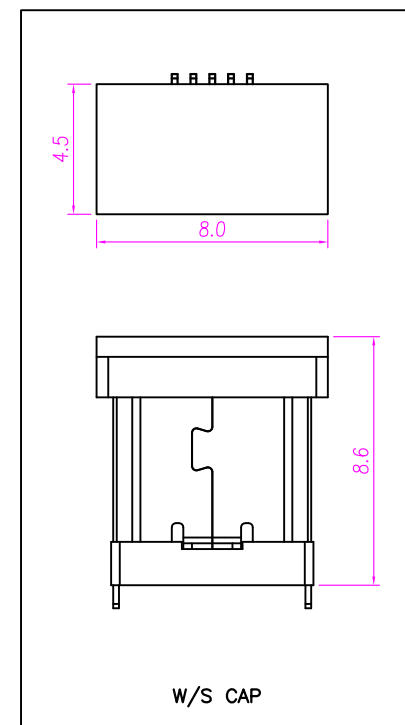
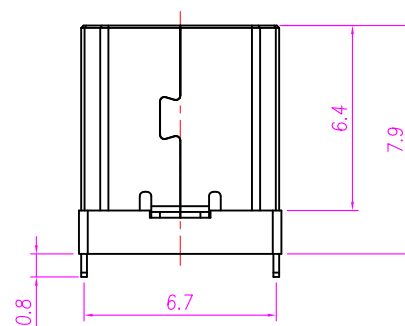
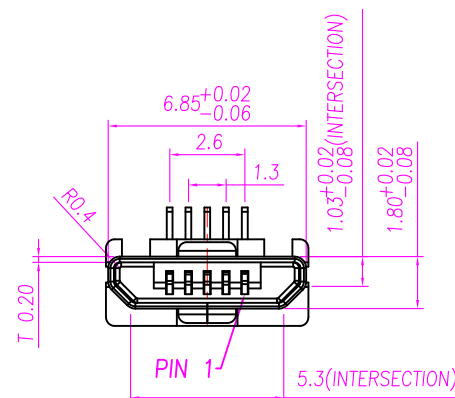




RECOMMENDED PCB LAYOUT
(TOP VIEW)



1. MATERIAL :

1-1. HOUSING : LCP UL94V-0 ; COLOR : BLACK

1-2. CONTACT : PHOSPHOR BRONZE

1-3. SHELL : STAINLESS STEEL

2. FINISH :


2-1. CONTACT : GOLD FLASH ON CONTACT AREA
GOLD FLASH ON OTHER AREA

2-2. SHELL : 可焊鍍銀

3. ENVIRONMENTAL

3-1. OPERATING TEMPERATURE RANGE: -20° ~ +85°

3-2. STORAGE TEMPERATURE RANGE: -40° ~ +85°



照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

ORDER INFORMATION

MISB-PVM1CR-5B-LF

SERIES LEADFREE
5 PIN B TYPE
REEL
CAP
MALE METAL FOOT
180°SMT

DESCRIPTION: MICRO USB 5PIN(M) 立式 SMT(WO LATCH)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

步驟一:


- 1.將成品——放入包裝盤內,依同一方向置入.
- 2.包裝方式,如圖所示.
- 3.一個包裝盤內600pcs.

步驟二:

- 1.一個紙箱可以裝10個包裝盤.
- 2.每盤600pcs,每箱6000pcs.
- 3.將包裝盤放入防水袋中,包裝完後再封箱.


步驟三:

- 1.用膠帶將紙箱封實.
- 2.將標籤貼於紙箱上.

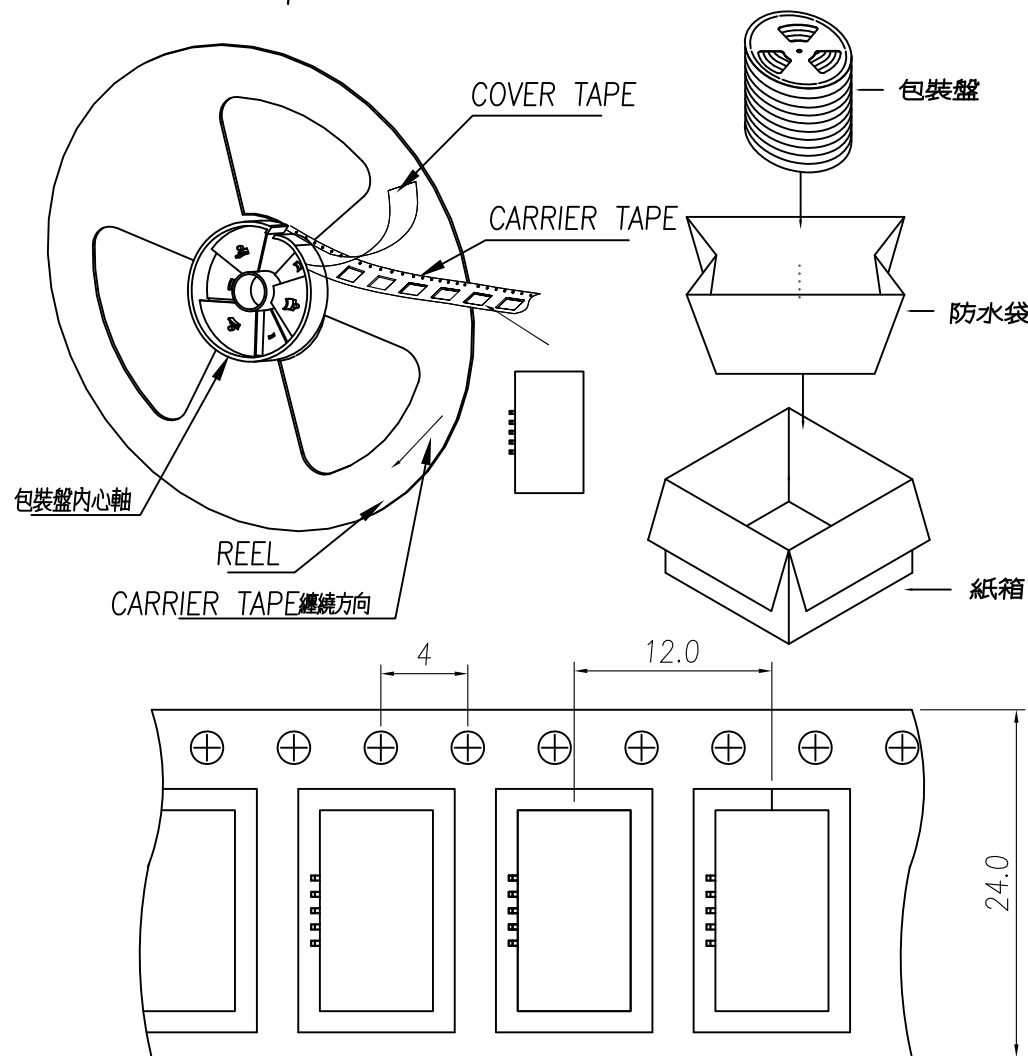

NOTE:

- 1.若有未裝滿之零數箱,必須以緩衝材塞滿.
- 2.在搬運過程中要輕拿輕放.
- 3.載運輸中不可堆放過多,不可有重壓現象.
- 4.在裝滿產品後,必須空留帶前和帶後15格以上,然後用紙膠布貼上.
- 5.上帶在貼下帶時必須平整,且黏貼處不要出現氣泡.

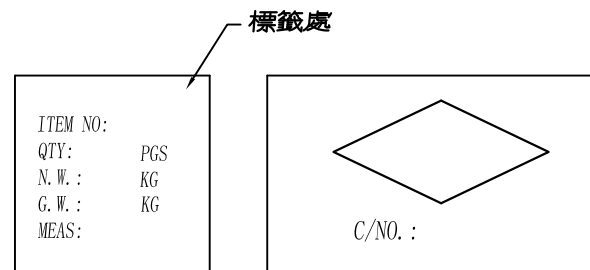

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

照片框

ORDER INFORMATION

MISB-PVM1CR-5B-LF

SERIES
MALE
REEL
CAP
METAL FOOT
180°SMT
LEADFREE
5 PIN B TYPE

DESCRIPTION: MICRO USB 5PIN(M) 直式 SMT(WO LATCH)