




RECOMMENDED PCB LAYOUT

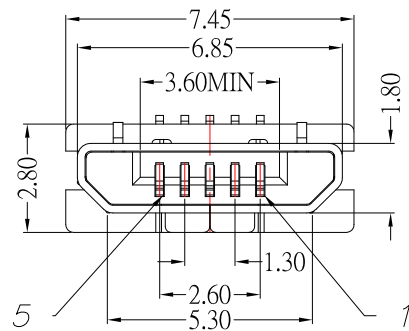

1.SPECIFICATION:

- 1.1 RATING: 30V , 1.0 A
- 1.2 DIELECTRIC WITHSSTANDING VOLTAGE: 100 VAC
- 1.3 CONTACT RESISTANCE: 50 mΩ MAX.
- 1.4 INSULATION RESISTANCE: 100 MΩ MIN.
- 1.5 TEMPERATURE RANG: -30° C ~80° C
- 1.6 LIFE CYCLES: 1500 CYCLES

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°



ORDER INFORMATION

MISB-PVX-5B-LF
SERIES LEADFREE
5 PIN B TYPE
NON POST
180°SMT
MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: MICRO 5P 公頭立式SMT H6.9mm