

SPECIFICATIONS

Electrical:

- 1.Current Rating: 1.0A / contact terminal
- 2.Voltage Rating: 30V DC
- 3.Contact Resistance: 30 mΩ Max
- 4.Dielectric Withstanding Voltage: 100 V AC
- 5.Insulation Resistance: 100 MΩ Min

Mechanical:

- 1.Mate force: 35N (Max)
- 2.Withdrawal force: 8N (Min) , initial


Material:

- 1.Hook: SUS 301
- 2.Contact: Phosphor Bronze
- 3.Shell: SUS 301
- 4.Insulator: PA6T




Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

CONTACT NUMBER	SIGNAL NAME
PIN 1	VBUS
PIN 2	D-
PIN 3	D+
PIN 4	ID
PIN 5	GND

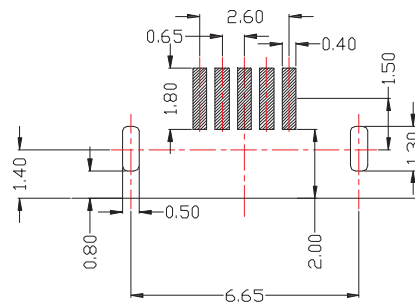

PCB LAYOUT MOUNTING PATTERN

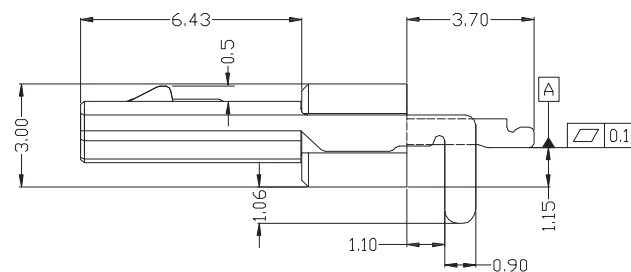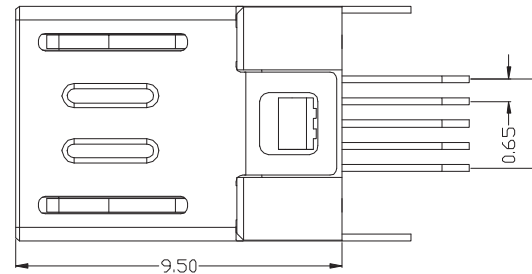

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2
Above 5 ~ 30 ±0.3
Above 30 ~ 50 ±0.4
Above 50 ±0.5
Angle ±0.3°

ORDER INFORMATION

MISB-PWMR-5B-LF


SERIES
LEADFREE
5 PIN B TYPE
REEL
METAL FOOT
90°SMT
MALE

DESCRIPTION: MICRO USB 5P/M 板端 SMT TYPE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

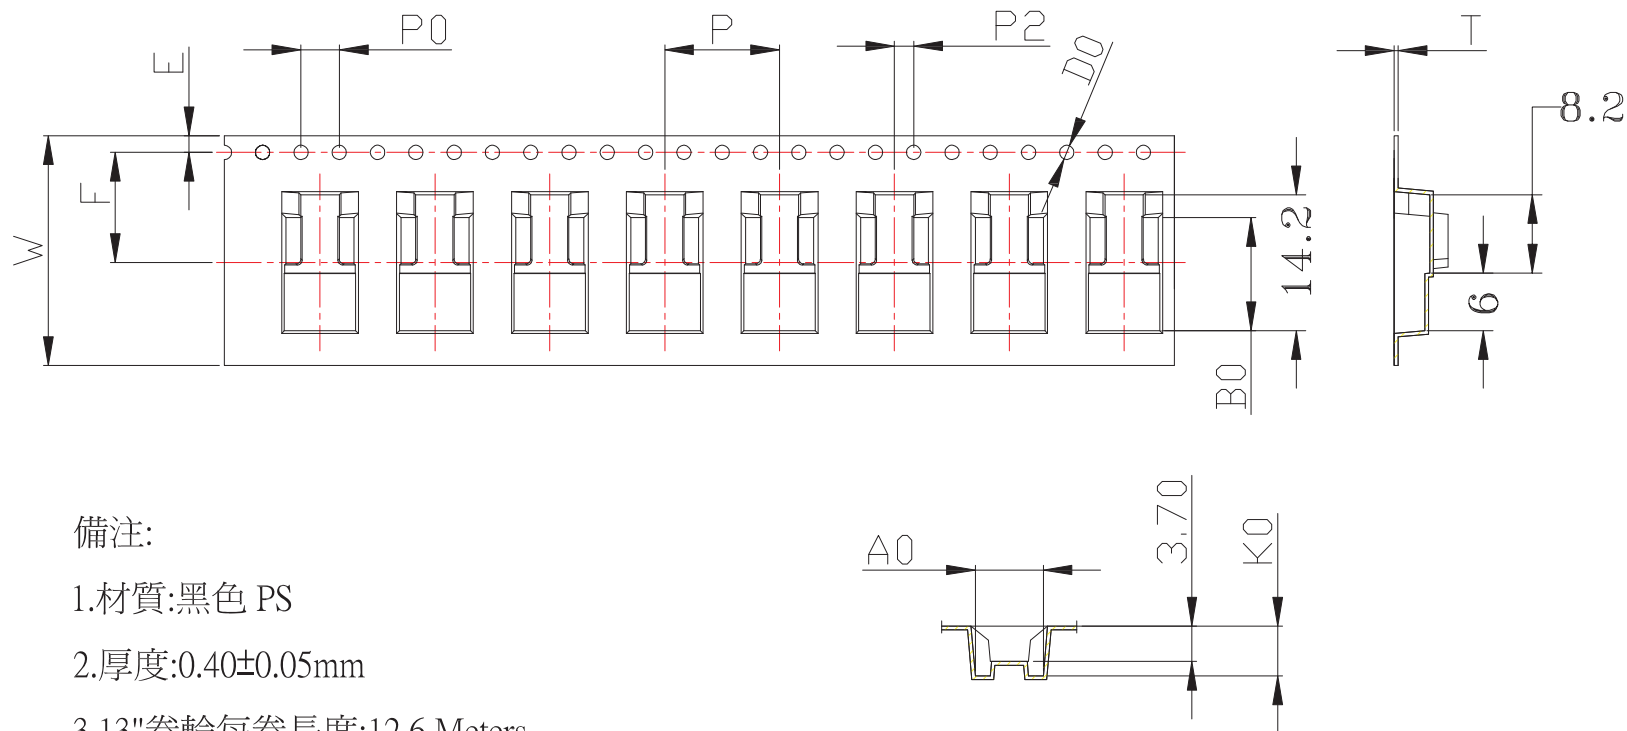

備注:

1.材質:黑色 PS

2.厚度:0.40±0.05mm

3.13"卷輪每卷長度:12.6 Meters

4.13"卷輪包裝元件顆粒數:1,000 PCS

W	A ₀	B ₀	K ₀	K ₁	P	F	E	D ₀	D ₁	P ₀	P ₂	T
24.0 ^{+0.30} _{-0.30}	7.10 ^{+0.10} _{-0.10}	11.8 ^{+0.10} _{-0.10}	5.20 ^{+0.10} _{-0.10}		12.0 ^{+0.10} _{-0.10}	11.50 ^{+0.10} _{-0.10}	1.75 ^{+0.10} _{-0.10}	1.50 ^{+0.10} _{-0.00}		4.00 ^{+0.10} _{-0.10}	2.00 ^{+0.10} _{-0.10}	0.40 ^{+0.05} _{-0.05}

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2
Above 5 ~ 30 ±0.3
Above 30 ~ 50 ±0.4
Above 50 ±0.5
Angle ±0.3°

照片框

ORDER INFORMATION

MISB-PWMR-5B-LF

SERIES
LEADFREE
5 PIN B TYPE
REEL
METAL FOOT
90°SMT
MALE

DESCRIPTION: MICRO USB 5P/M 板端 SMT TYPE PACKING

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com