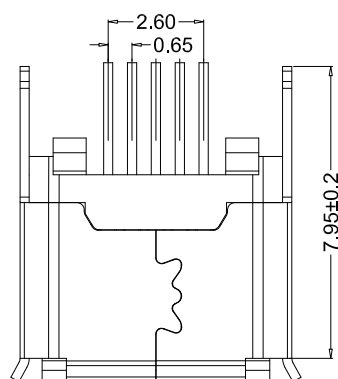
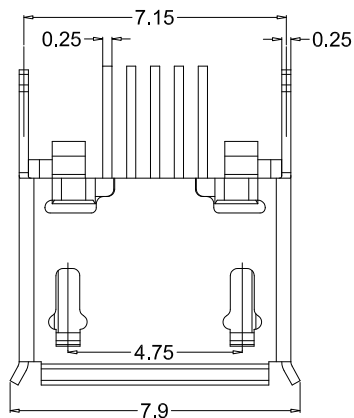


SPECIFICATIONS

1. Electrical :

- 1.1 Current Rating: 1.5Ampere Maximum for Pin1 & Pin5
0.5Ampere Maximum for Pin2 & Pin3 & Pin4

- 1.2 Voltage Rating: 30V

- 1.3 Contact resistance : 30mΩ max.

- 1.4 Dielectric withstanding voltage : 100 V AC.

- 1.5 Insulation resistance : 100mΩ min.

2. Mechanical :

- 2.1 Mate and unmate force : Mate force : 35N MAX
Unmate force : 10N MIN

3. Environment :

- Operating Temperature : -25℃ to +80℃

4. Material :

- Housing : Thermoplastic high temp.UL94V-O

- Terminal : Copper Alloy.


- Shell : Stainless Steel.

5. Plating Layer :

- Contact : Plated Gold in Mating Area ; Gold Plated on Solder Balls ;

- Nickel under plated overall

- Shell : Tin under Plated surface layer

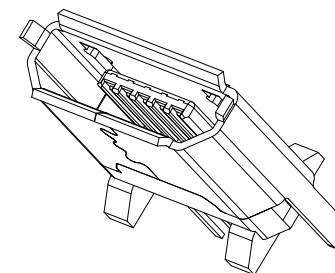

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

MISB-SDM2B-5B-LF

SERIES
LEADFREE
5 PIN B TYPE
B LAYOUT
METAL FOOT
DIP 180°
FEMALE

DESCRIPTION: Micro USB 5p Female DIP Vertical Type