


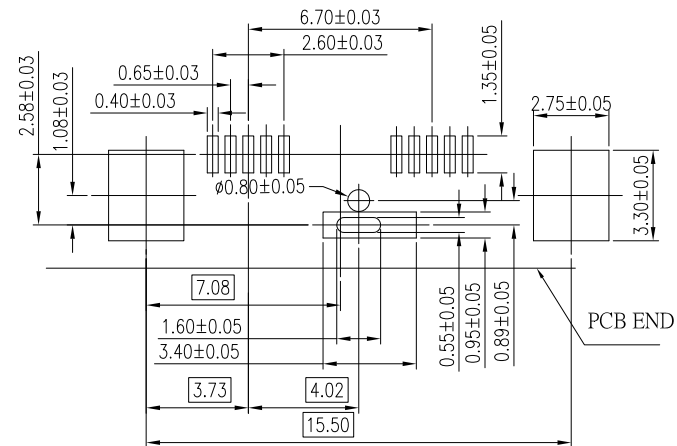

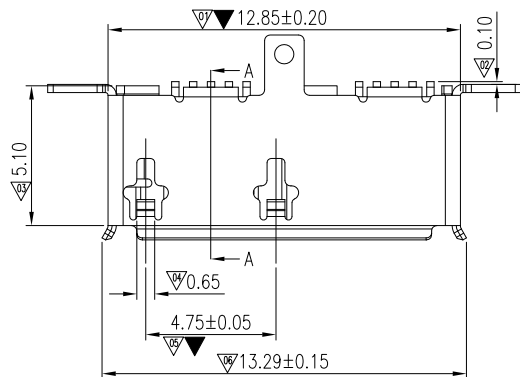


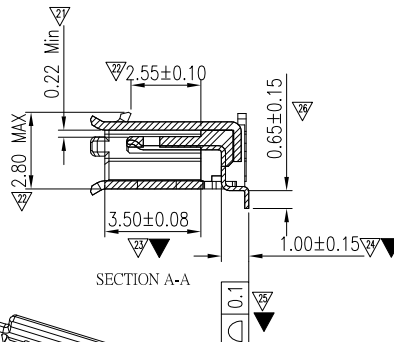

RECOMMENDED PCB LAYOUT

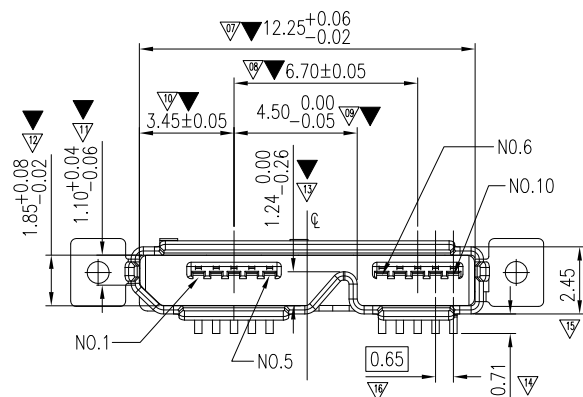

SECTION A-A

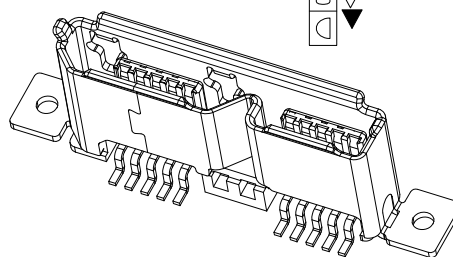

NOTES:

1. INSULATOR: LCP, COLOR-BLACK
2. USB CONTACT: BRASS, 0.15mm THICKNESS, SELECTIVE GOLD. PLATED ON CONTACT AREA, SN PLATED ON SOLDER TAIL, 80 U" MIN. NICKEL UNDERPLATED OVERALL.
3. SHELL: STAINLESS STEEL, 0.3mm THICKNESS, GOLD FLASH PLATED ON THE SOLDERING TAB.

03	CONTACT	10	BRASS	C2680
02	SHELL	1	SPCC	SUS301
01	HOUSING	1	LCP	UL94V-0; COLOR:BLACK
ITEM	DESCRIPTION	Q'TY	MATERIAL	REMARK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MISB-SVPMES15-10B-LF

SERIES
FEMALE
POST
180°SMT
LEAD FREE
10 PIN B TYPE
SEMI GOLD 15u"
METAL EAR

DESCRIPTION: MICRO USB 3.0 B FEMALE 180° SMT TYPE