

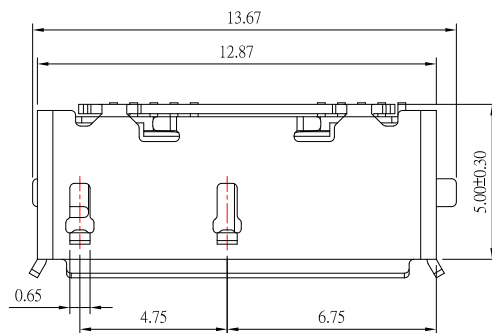
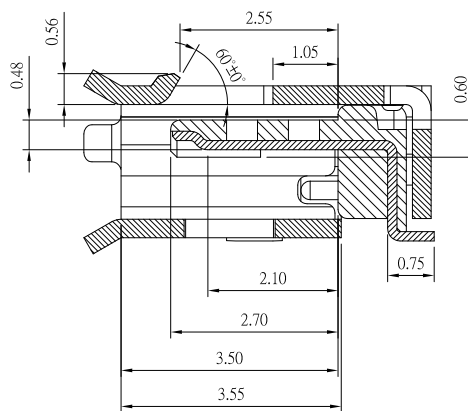
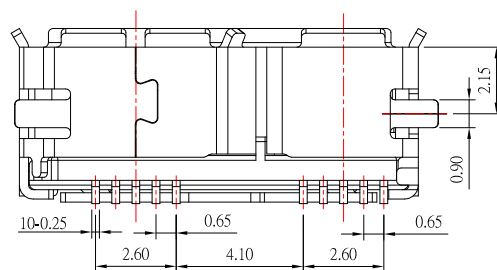
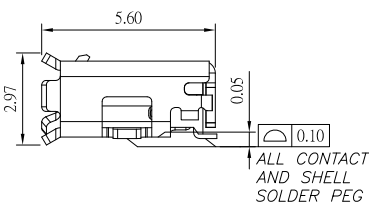


Detail C(2:1)

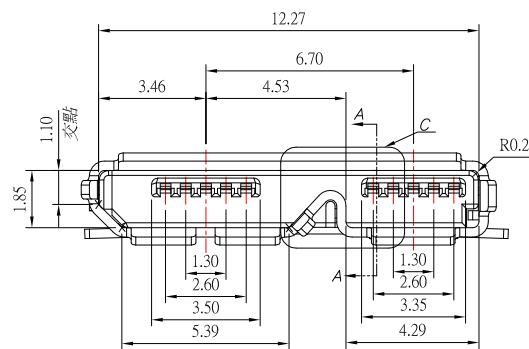

SECTION "A-A"(2:1)

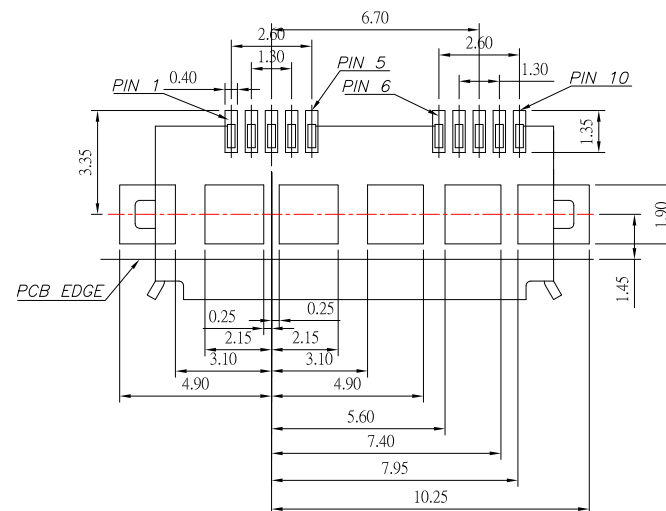

P.C.B LAYOUT MOUNTING PATTERN

NOTE:

1.MATERIAL:

1.1 INSULATOR: LCP, UL 94V-0

1.2 CONTACT: BRASS

1.3 SHELL: SUS304

2.Finish:

2.1 CONTACT: PLATED GOLD IN MATING AREA ;

TIN PLATED ON SOLDER BALLS ;

NICKEL UNDER PLATED OVERALL

2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle +0.3°

PPOJECTION

照片框

ORDER INFORMATION

MISB-SWE-10B-LF

SERIES LEADFREE
10 PIN B TYPE
EAR
90°SMT
FEMALE

DESCRIPTION: MICRO USB 3.0 B TYPE SMT