

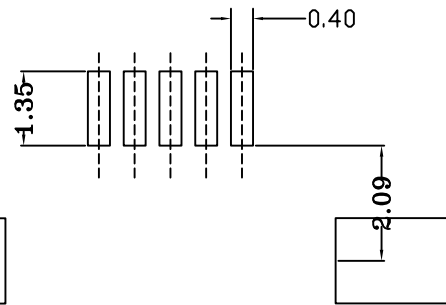
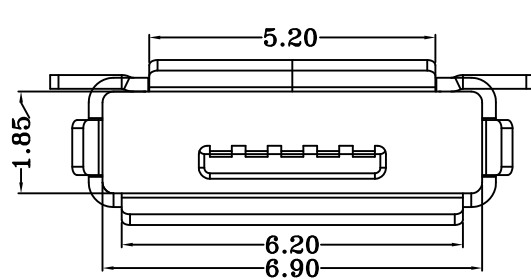
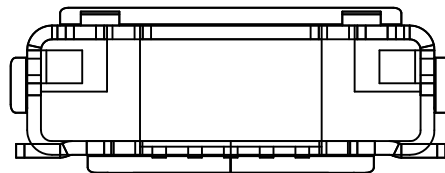




PCB LAYOUT

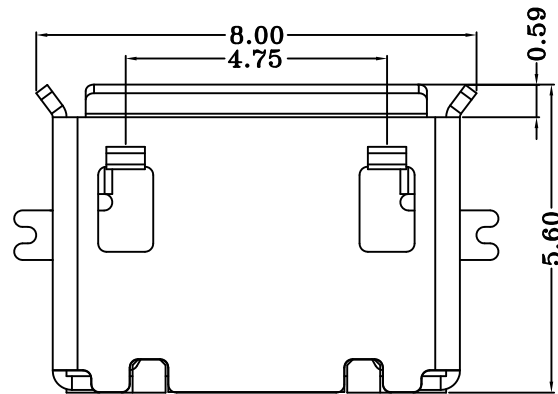

Material:

- 1.1 Housing: High Temperature thermoplastic with g.f, UL94v-0
- 1.2 Contact: copper alloy, $t=0.20\text{mm}$
- 1.3 Shell: copper alloy, $t=0.25\text{mm}$
2. Specification:
 - 2.1 Current rating: 0.5A Max.
 - 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - 2.3 Contact resistance: 30 mΩ Max.
 - 2.4 Insulation resistance: 100 MΩ Min.
 - 2.5 Total mating force: 3.57 Kgf Max.
 - 2.6 Total unmating force: 1.0 Kgf Min. 0.81~2.05 Kgf Min. after 10000 insertion/extraction cycles
 - 2.7 Temperature range: -30°C~80°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ± 0.45
.X ± 0.30
.XX ± 0.15
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

MISB-SWE-5AB-LF

SERIES

LEADFREE

5 PIN AB TYPE

EAR

90°SMT

FEMALE

DESCRIPTION: MICRO-USB-AB-SMT