
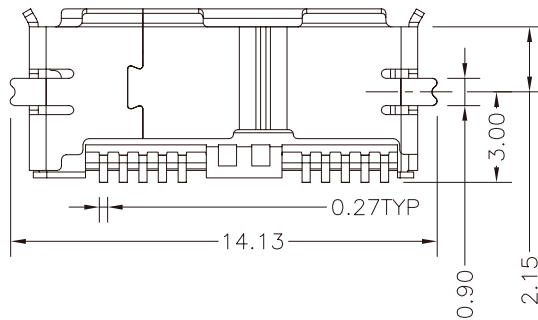

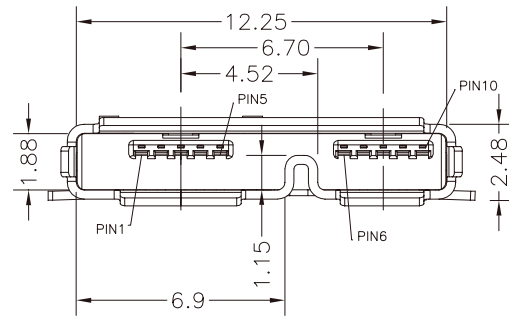
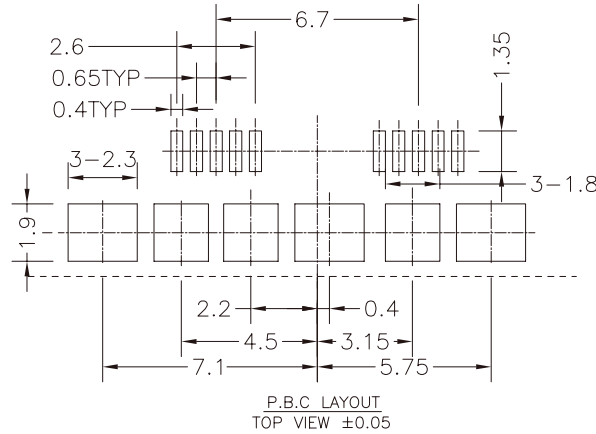


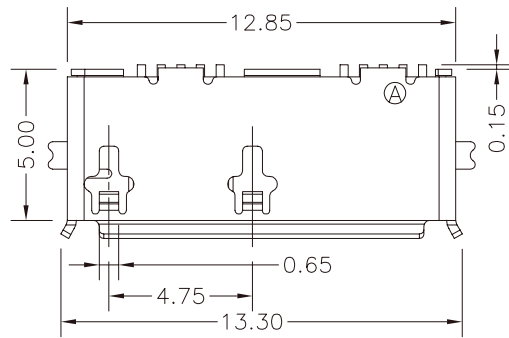

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
SHELL: STAINLESS STEEL, TIN PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -25°C~+105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MISB-SWER-10AB-LF
SERIES REEL LEADFREE
10 PIN AB TYPE
90°SMT
FEMALE

DESCRIPTION: MICRO USB AB TYPE, SMT, PCB MOUNT, METAL SHIELD, FEMAL

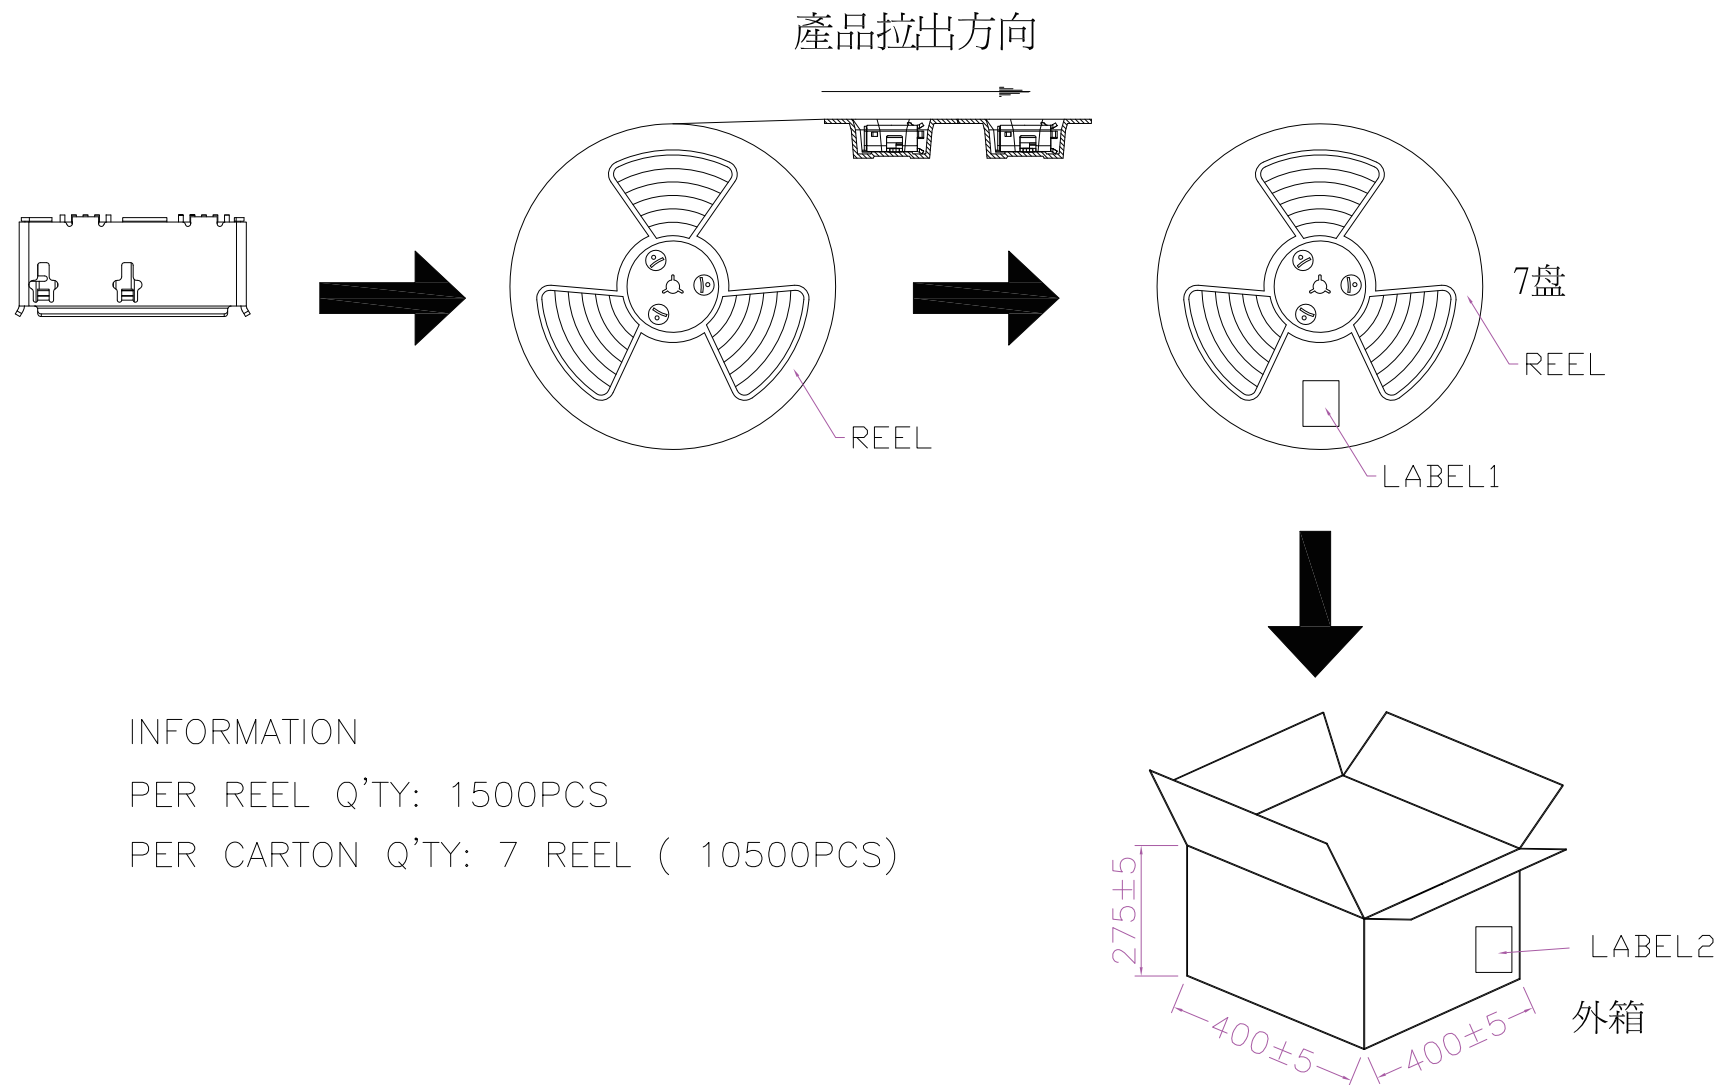

INFORMATION

PER REEL Q'TY: 1500PCS

PER CARTON Q'TY: 7 REEL (10500PCS)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MISB-SWER-10AB-LF

SERIES

REEL

EAR

90°SMT

FEMALE

LEADFREE
10 PIN AB TYPE

DESCRIPTION: MICRO USB 3.0 B TYPE, SMT, PCB MOUNT METAL SHIELD, FEMALE PACKING