

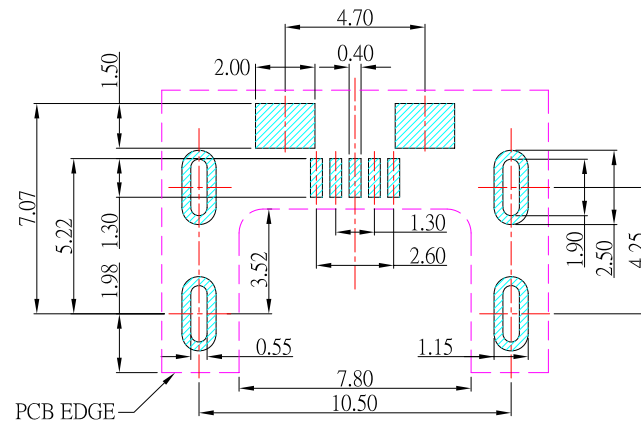
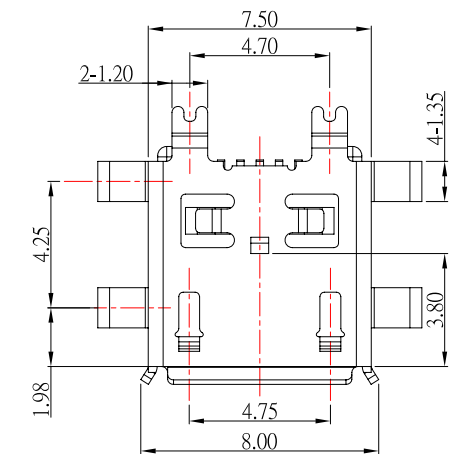
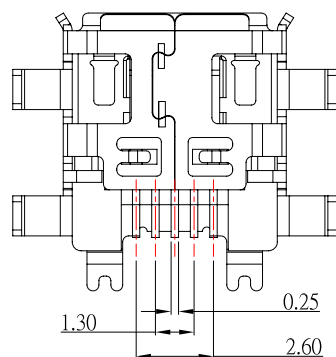
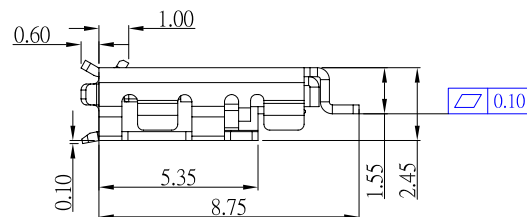
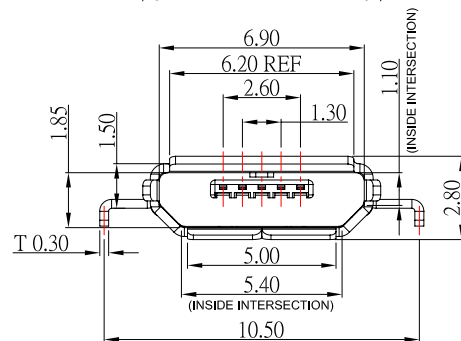


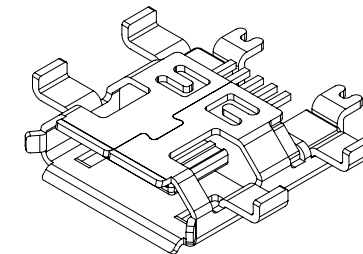

RECOMMENDED PCB LAYOUT
(TOP VIEW)

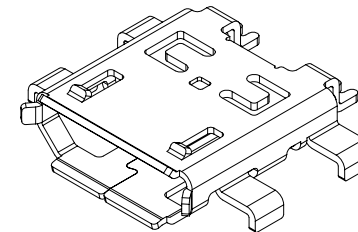

ITEM	PART NAME	QTY	MATERIAL
1	SHELL	1	STAINLESS , PLATED TIN ;
2	CONTACT	5	C2680R-H , PLATED NI / AU ;
3	HOUSING	1	LCP , UL94V-0 , BLACK;

SPECIFICATIONS

1.MECHANICAL:

MATING FORCE: 35N MAX.

UNMATING FORCE:

10N MIN,INITIAL 8~20N AFTER 10,000 CYCLES.

DURABILITY: 10,000 CYCLES MIN.

2.ELECTRICAL:

CURRENT: 1.0A

VOLTAGE: 30V MAX

WITHSTANDING VOLTAGE: 100V AC

CONTACT RESISTANCE:

30 mΩ MAX INITIAL ; 40 mΩ MAX AFTER 10,000 CYCLES

3.ENVIRONMENTAL

OPERATING TEMPERATURE RANGE -30°C ~ +80°C

4. SALT SPRAY : 8 H AT 35%DC WITH

5%-SALT-SOLUTION CONCENTRATION.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

MISB-SWFMME-5B-LF

SERIES

FEMALE

90°SMT

LEADFREE

5 PIN B TYPE

EAR

METAL FOOT

OFFSET

DESCRIPTION: