

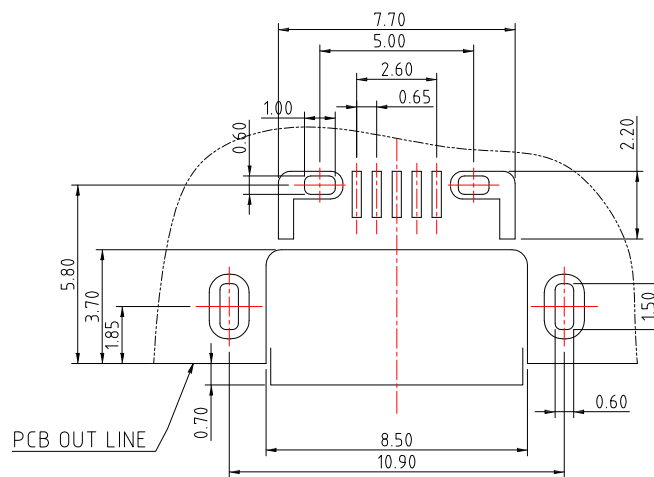

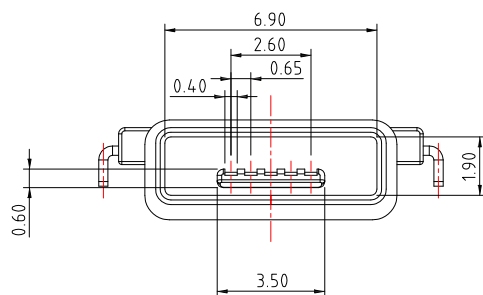
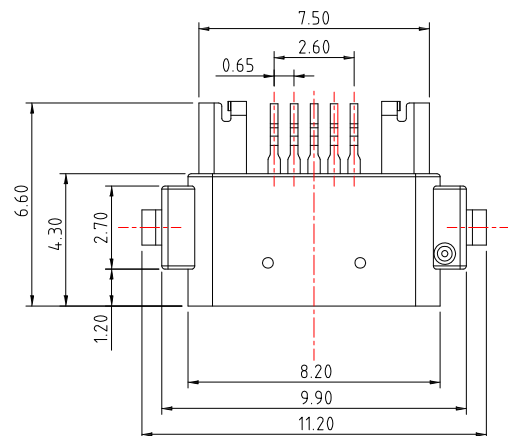
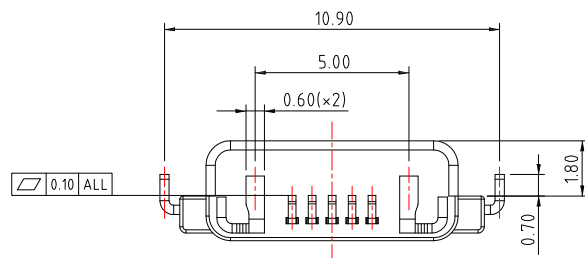


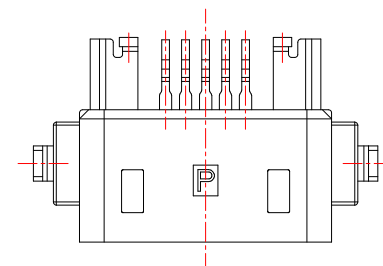

P.C.B LAYOUT MOUNTING PATTERN



NOTES:

MATERIAL:

- 1.1 HOUSING: LCP & PA9T, UL94V-0
- 1.2 CONTACT: PHOSPHOR BRONZE
- 1.3 SHELL: BRASS

FINISH:

- 2.1 CONTACT: PLATED GOLD IN MATING AREA ;
GOLD PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
- 2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER
- 3.SPECIFICATION:
- 3.1 RATING: 30V DC/AC , 1.0A
- 3.2 DIELECTRIC WITHSSTANDING VOLTAGE: 500 VAC
- 3.3 CONTACT RESISTANCE: 30 mΩ MAX.
- 3.4 INSULATION RESISTANCE: 500 MΩ MIN.
- 3.5 TEMPERATURE RANGE: -20°C ~ +60°C

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

PPOJECTION

照片框

ORDER INFORMATION

MISB-SWFMMRV-5AB-LF
SERIES | LEADFREE
FEMALE | 5 PIN AB TYPE
METAL FOOT
OFFSET
90°SMT

DESCRIPTION: MICRO USB 5PIN SMT(AB)TYPE 沉板上H:1.45mm

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com