


## MATERIALS

HOUSING: LCP (UL 94V-0)  
 SHELL: SUS, NICKEL PLATED  
 TERMINAL: COPPER ALLOY/C5191,  
 GOLD PLATED OVER ALL

## SPECIFICATION

CURRENT RATING: 1 AMP MAX  
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -25°C~+105°C

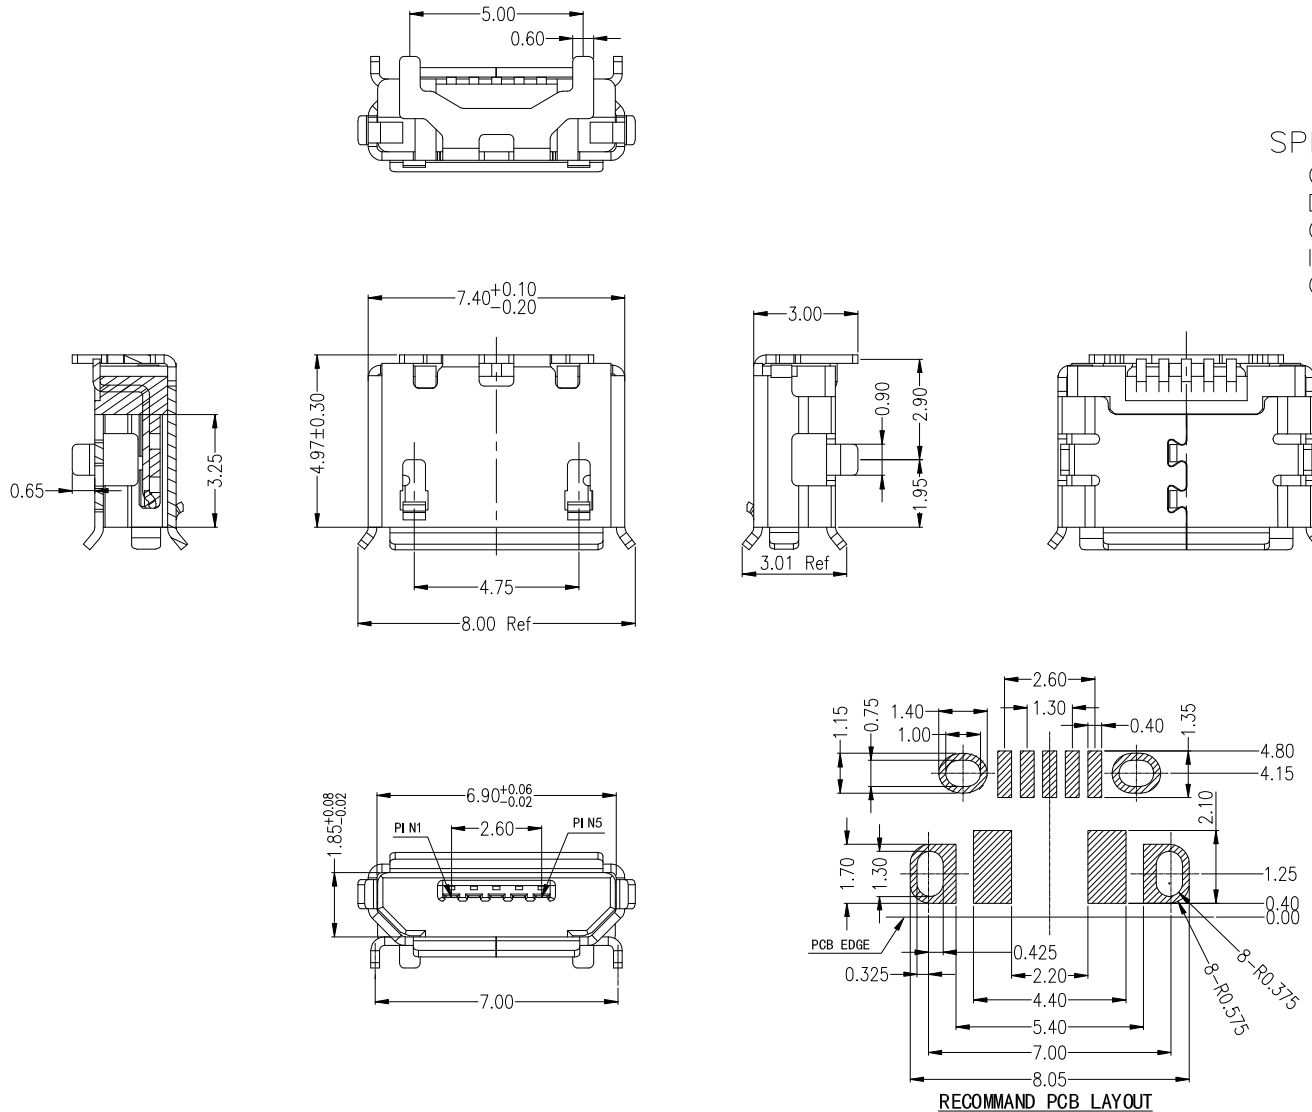

NO.	APPLICATION	TYPICAL WIRING ASSIGNMENT
P1	VBUS	RED
P2	D-	WHITE
P3	D+	GREEN
P4	ID	RA_PLUG-ID
P5	GND	BLACK

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ±

SIZE A4

PJECTION

照片框

## ORDER INFORMATION

MISB-SWMM7050-5B-LF  
 SERIES | LEADFREE  
 | 5 PIN B TYPE  
 | METAL FOOT 7.0mm+5.0mm  
 | 90°SMT  
 | FEMALE

DESCRIPTION: MICRO USB B TYPE. PCB MOUNT. SMT+DIP, METAL SHIELD, FEMALE, WITHOUT POST

煜倫股份有限公司

www.morethanall.com