
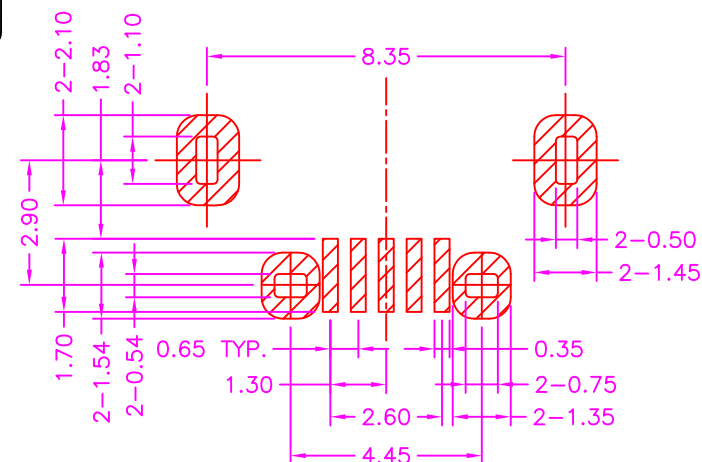
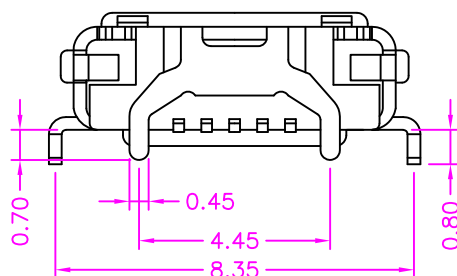
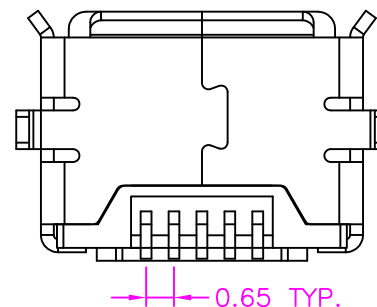
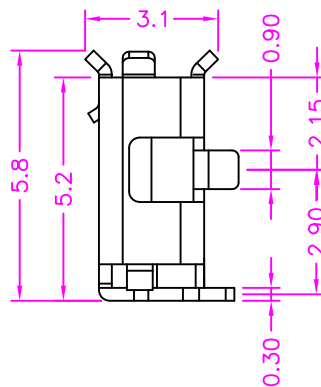


MATERIALS

HOUSING: LCP (UL 94V-0), BLACK
SHELL: STAINLESS STEEL
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -25°C~+105°C

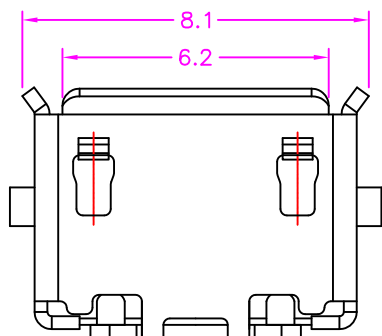

P.C.B. LAYOUT
TOP VIEW ± 0.05

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X ± 0.40
X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG $\pm$

PPOJECTION



照片框

ORDER INFORMATION

MISB-SWMM84R-5AB-LF

SERIES FEMALE
LEADFREE
5 PIN AB TYPE
REEL
FOOT WIDTH 8.35mm
METAL FOOT / 2
90°SMT

DESCRIPTION: MICRO USB AB TYPE, PCB MOUNT, SMT, METAL SHIELD FEMALE

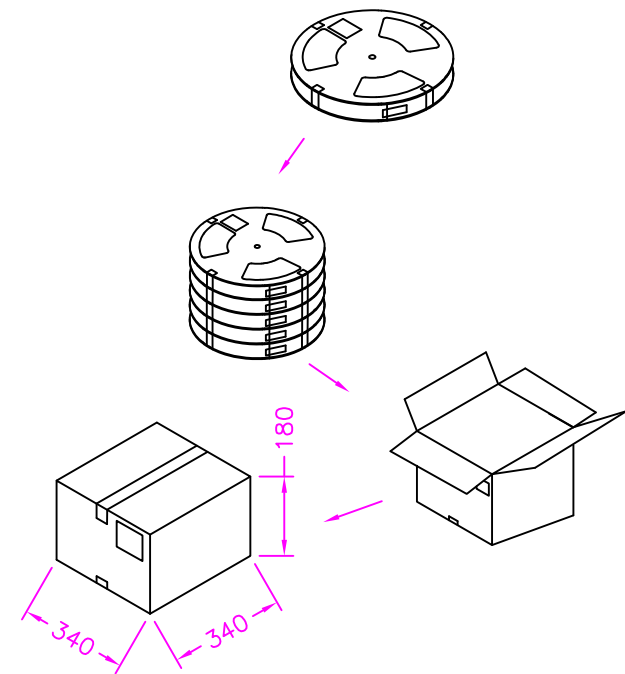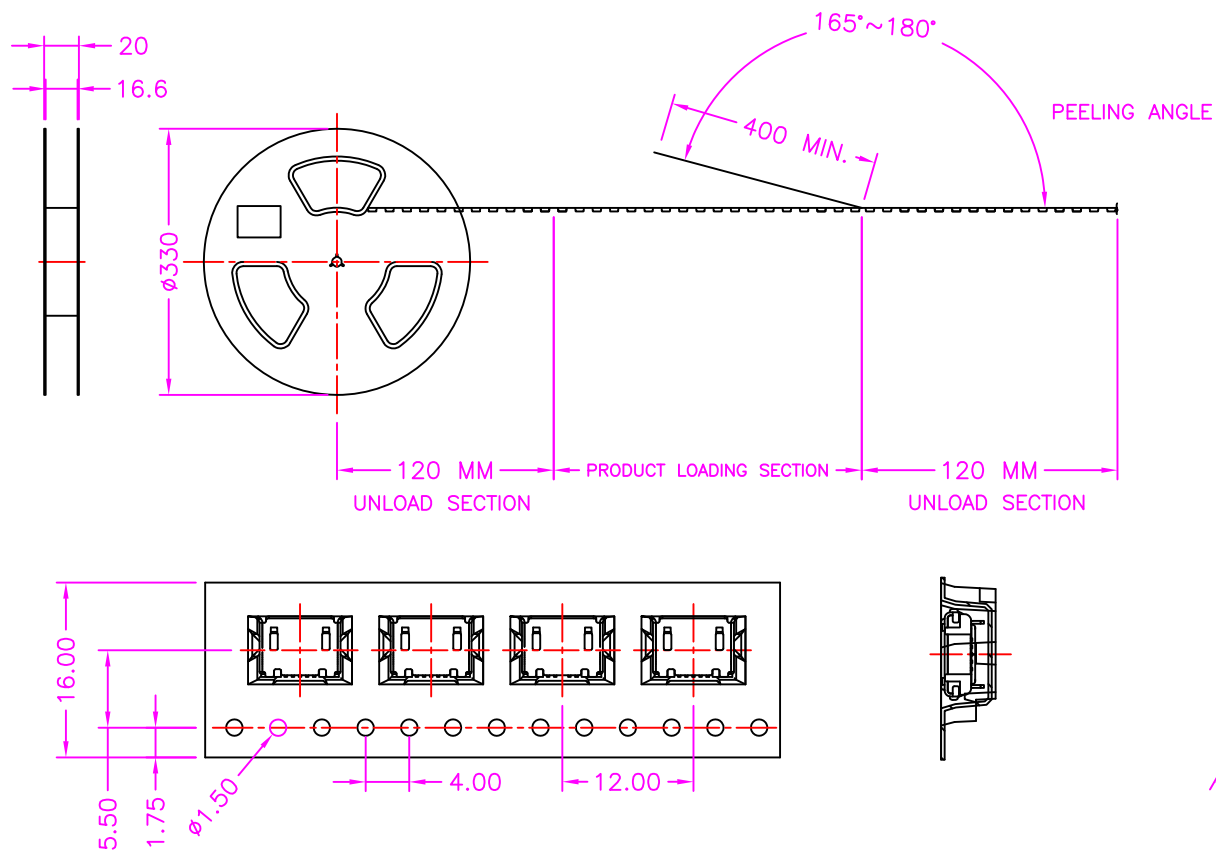

NOTE: 1500PCS/REEL, 12000PCS/8 REEL/CARTON

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG $\pm 1^{\circ}$

PPOJECTION

照片框

ORDER INFORMATION

MISB-SWMM84R-5AB-LF

SERIES | LEADFREE

5 PIN AB TYPE

REEL | FOOT WIDTH 8.35mm

METAL FOOT / 2

90°SMT

DESCRIPTION: MICRO USB AB TYPE, PCB MOUNT, SMT, METAL SHIELD FEMALE