

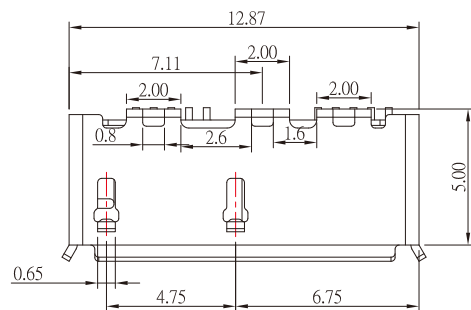
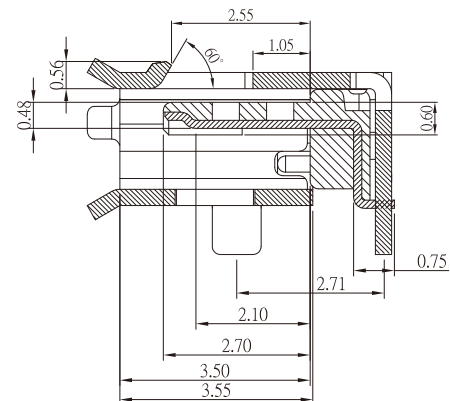
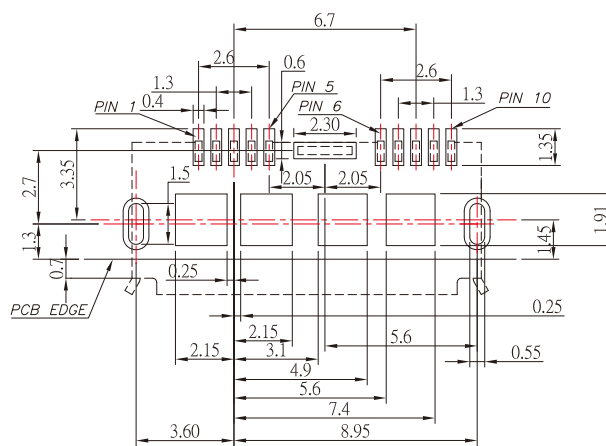


Detail C (2:1)



SECTION "A-A" (2:1)

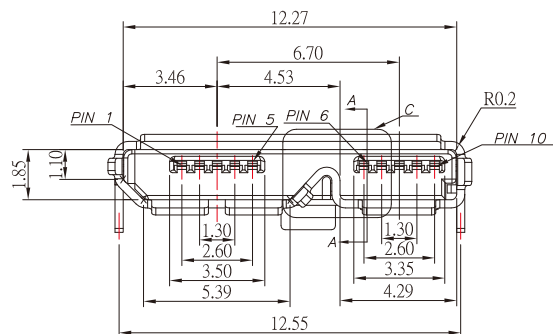

P.C.B LAYOUT MOUNTING PATTERN

Pin Number	Signal Name
1	VBUS Power
2	D-
3	D+
4	ID
5	GND
6	MicB_SSTX-
7	MicB_SSTX+
8	GND_DRAIN
9	MicB_SSRX-
10	MicB_SSRX+

NOTE:

1.MATERIAL:

1.1 INSULATOR: LCP, UL 94V-0,Black

1.2 CONTACT: BRASS

1.3 SHELL: SUS304

2.Finish:

2.1 CONTACT: PLATED GOLD IN MATING AREA ;

TIN PLATED ON SOLDER BALLS ;

NICKEL UNDER PLATED OVERALL

2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER

RoHS Compliant

TOLERANCES ARE



ORDER INFORMATION

MISB-SWMMR-10B-LF

SERIES REEL 10 PIN B TYPE LEADFREE
METAL FOOT / 2
90°SMT FEMALE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1






DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

DESCRIPTION: MICRO 3.0 B/F DIPX3 , 腳長:0.9mm

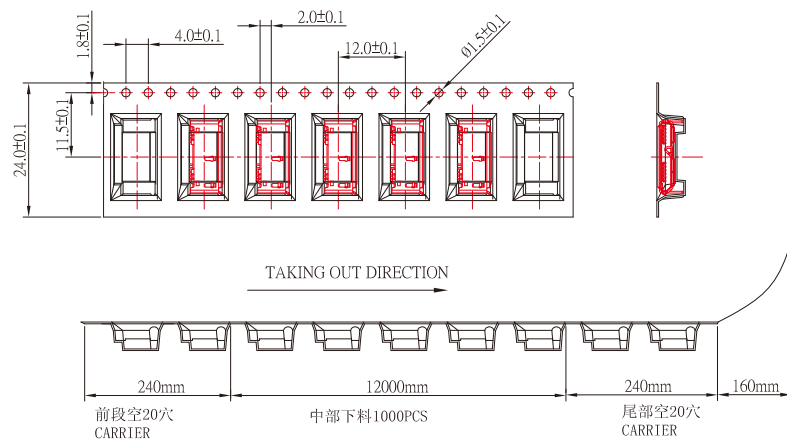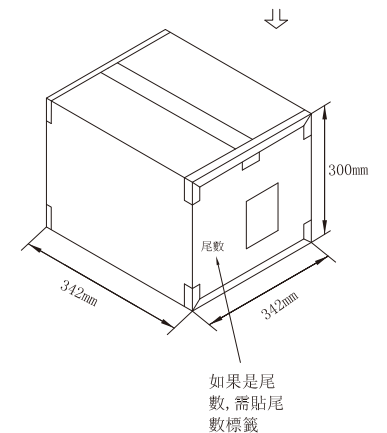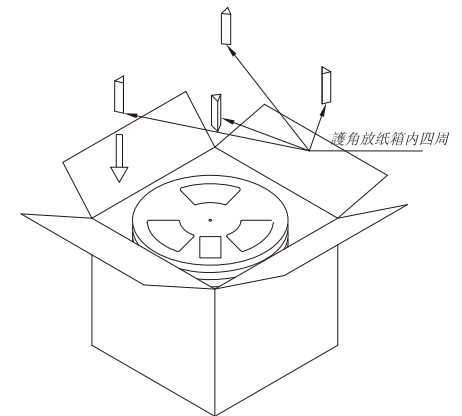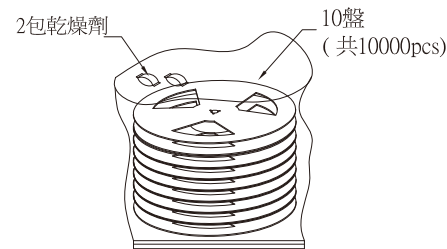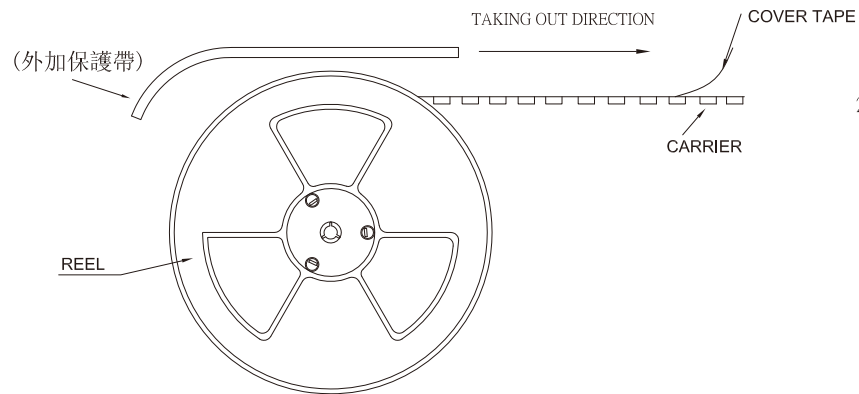

Notes:

- 1.每卷前後各空20PCS.尾部用美紋膠紙封住，
- 2.然後再卷一圈保護帶,保護帶最後重疊約50MM，用皺紋膠紙將其封住
- 3.每10卷盤裝入一個防水袋,然後放入一個外箱;紙箱內四週放護角
- 4.在搬運過程中要輕拿輕放.
- 5.在運輸中不可堆放過多,不可有重壓現象.
- 6.跌落測試條件:
成品箱子從1.5米高自由落體:(三棱六面一角)
檢驗項目:1.產品不可跑出下帶凹槽.
2.產品不可有摔傷,變形.
3.外箱及內包裝材料不可嚴重破損.

產品		10K
PE袋		1PCS
三角柱		4PCS
乾燥劑		2PCS
COVER TAPE	PET 21.0mm	若干
REEL	PS 24.0mm	10R
紙箱	雙坑A=B 342*342*300	1
品名	規格 (mm)	用量 (PCS)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MISB-SWMMR-10B-LF

SERIES
LEADFREE
10 PIN B TYPE
REEL
METAL FOOT / 2
90°SMT
FEMALE

DESCRIPTION: