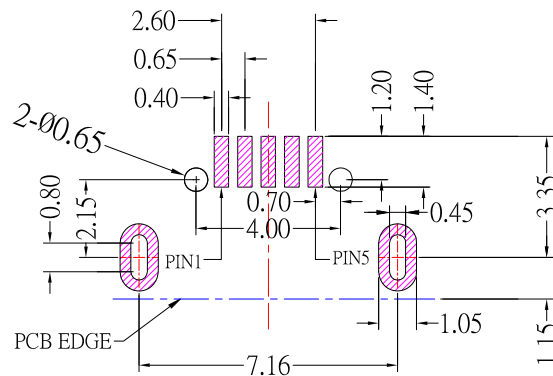

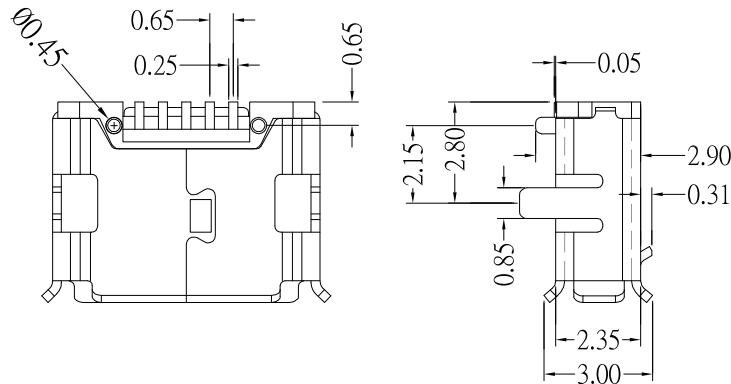



P.C.B LAYOUT MOUNTING PATTEN

SPECIFICATIONS

Electrical:

- 1.Current Rating: 1.0A / contact terminal
- 2.Voltage Rating: 30V DC
- 3.Contact Resistance: 50 milliohms Max
- 4.Dielectric Withstanding Voltage:
300 V AC at Sec Level
- 5.Insulation Resistance: 100 MEGA ohms Min

Mechanical:

- 1.Connector Mate and Unmate Force
Mate force: 3.0 kgf (Max)
Unmate force: 0.7 kgf (Min)
- 2.Terminal Retention: 0.5 kgf (Min)

Material:

- 1.Housing:
High Temperature Thermal Plastics,
UL 94V-0 LCP Black
- 2.Contact: Phosphor Bronze
- 3.Shell: Brass

Finish:

- 1.Contact: Plated Gold in Mating Area;
Tin on Solder Balls
- 2.Shell: Nickel Plating

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±


照片框

ORDER INFORMATION


MISB-SWMP40R-5AB-LF
SERIES | REEL | LEADFREE
FEMALE | METAL | POST 4.0mm
90°SMT

DESCRIPTION: MICRO USB AB /Shell DIP TYPE


包裝作業示意圖：




1. 捲(料)盤




2. 1000 pcs/盤

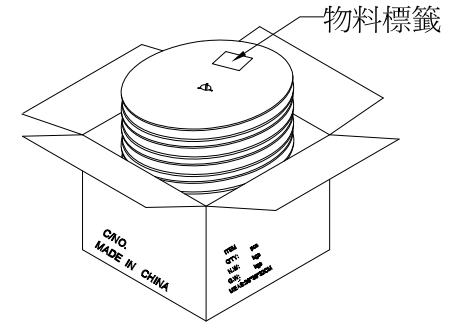


3. 10盤/箱 (10,000 pcs)

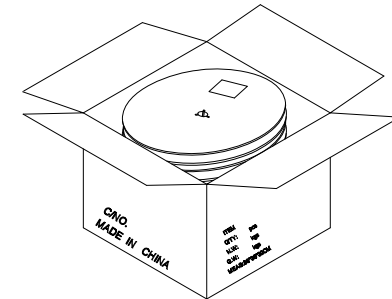

4. 每箱裝10盤，尾數箱(未滿)在多餘空間，加裝填充物。



6. 依圖示貼上物料標籤或環保標籤



5. 使用透明膠帶封裝外箱封"工"字型



註記:

1. 捲(料)盤：380X28 mm；
2. 每盤裝1000 PCS；
3. 每箱裝10盤(10,000 pcs)；
4. 外箱尺寸：長X寬X高 36X36X32 cm；
5. 產品放入紙箱後，將紙箱擺放好，貼好包裝膠帶，然後在紙箱上貼上物料標籤，及環保標籤。

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MISB-SWMP40R-5AB-LF
SERIES REEL
FEMALE POST 4.0mm
METAL 90°SMT
LEADFREE
5 PIN B TYPE

DESCRIPTION: MICRO USB AB /Shell DIP TYPE