

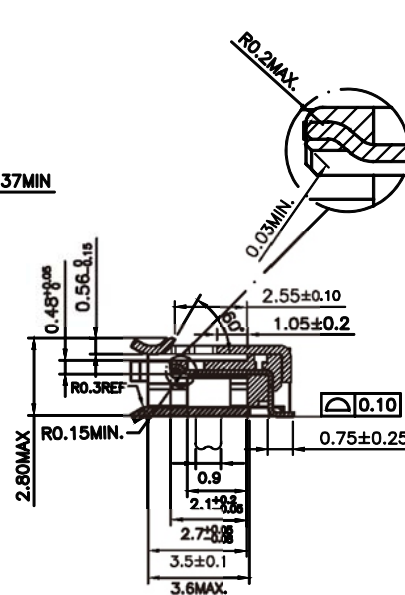
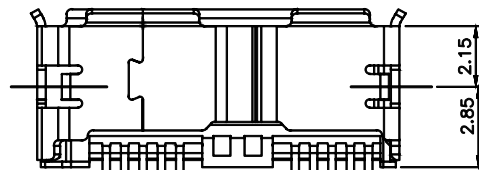
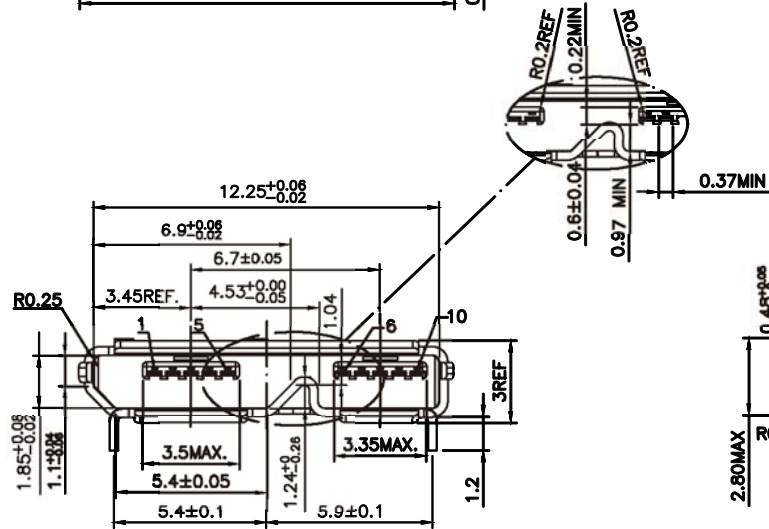


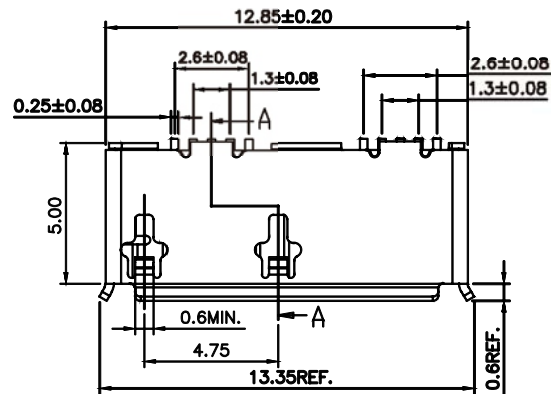

A-A

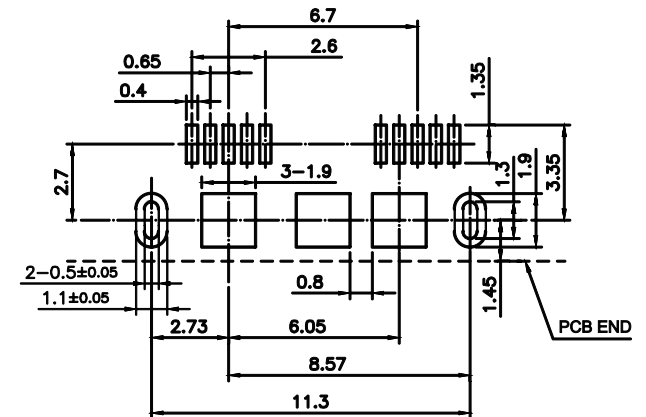

RECOMMENDED PCB LAYOUT

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
SHELL: STAINLESS STEEL, GOLD PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX (ONLY PIN 1, 5),
OTHER 1 AMP MAX
DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -25°C~+105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框


ORDER INFORMATION

MISB-SWMxxxR-10B-LF

SERIES T T T T LEADFREE
10 PIN B TYPE

FEMALE REEL
90°SMT BLANK:SEMI GOLD
METAL FOOT S15:SEMI GOLD 15u"
S30:SEMI GOLD 30u"

DESCRIPTION: MICRO CONNECTOR B TYPE PCB MOUNT,SMT

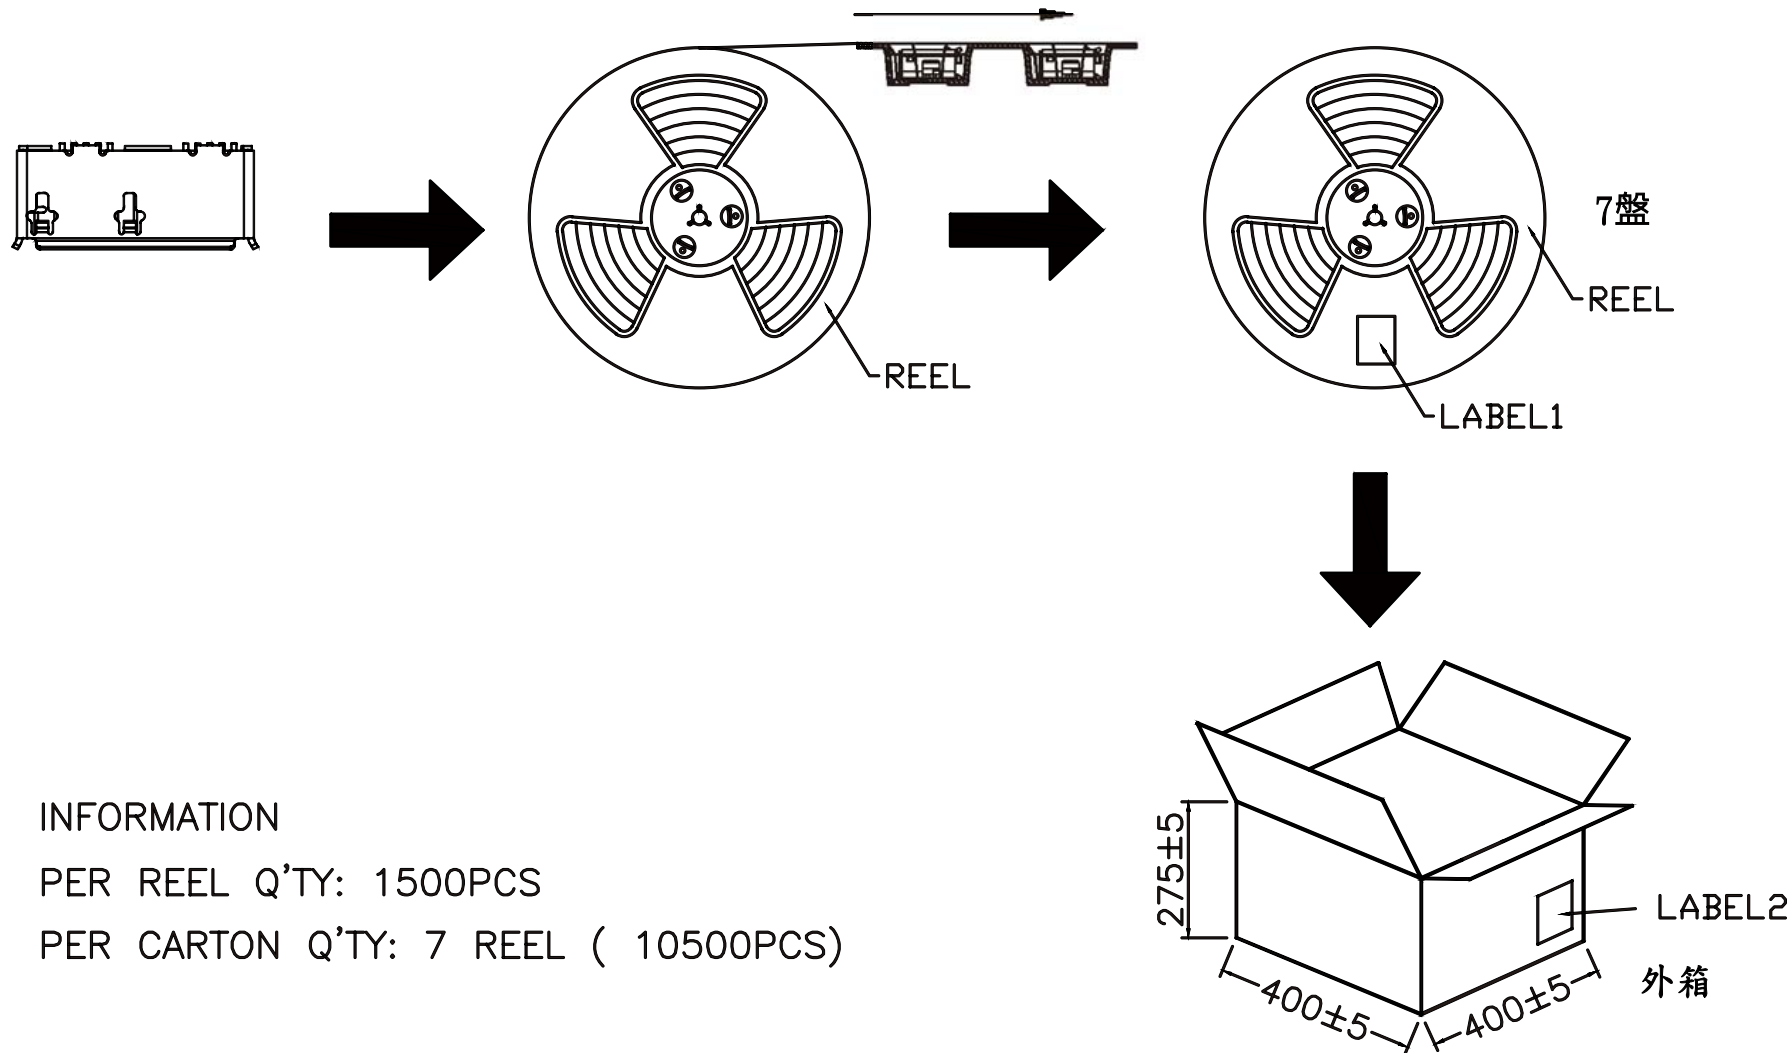

INFORMATION

PER REEL Q'TY: 1500PCS

PER CARTON Q'TY: 7 REEL (10500PCS)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MISB-SWMxxxR-10B-LF

SERIES | | | | LEADFREE
10 PIN B TYPE

FEMALE | | | | REEL
90°SMT | | | | BLANK:SEMI GOLD
METAL FOOT | | | | S15:SEMI GOLD 15u"
S30:SEMI GOLD 30u"

DESCRIPTION: MICRO CONNECTOR B TYPE PCB MOUNT,SMT