

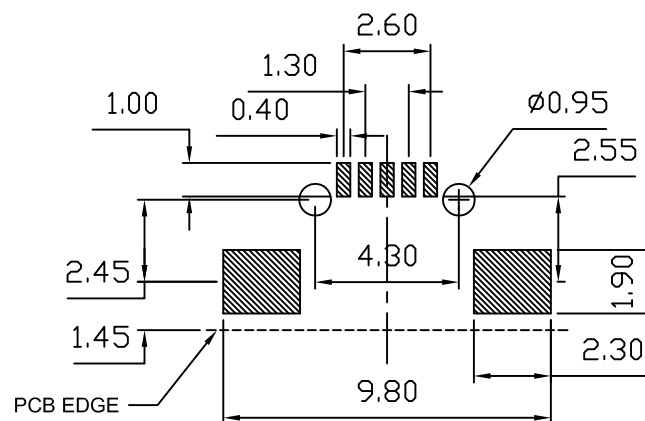
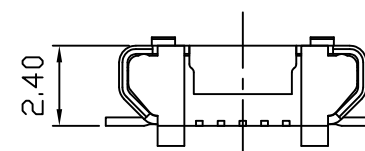
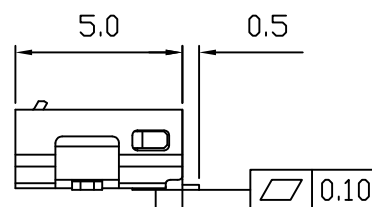
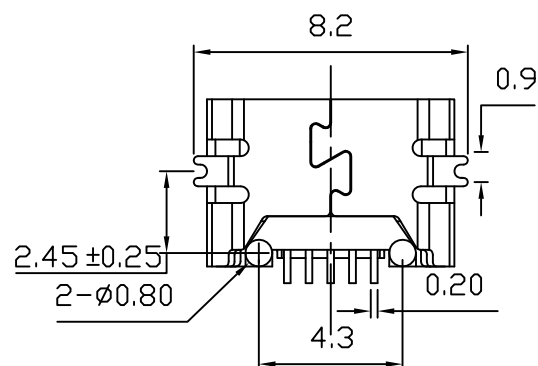
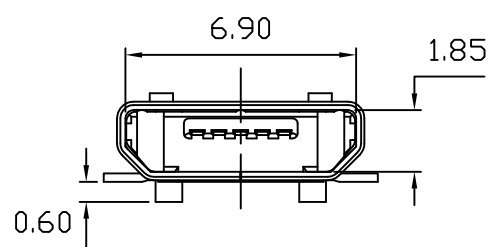


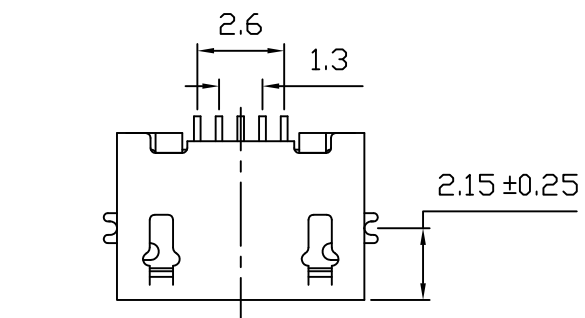

RECOMMENDED PCB LAYOUT
TOP VIEW
TOLERANCE: ±0.05mm
PCB THICKNESS: 0.80 ± 0.05mm

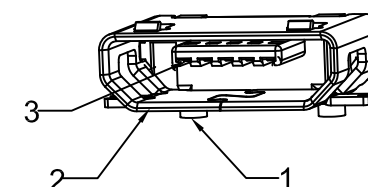

NO.	NAME	MATERIAL	FINISH
1	Housing	High-Thermoplastic	
2	Shell	Alloy	Nickel Plated
3	Terminal	Copper Alloy	Gold-Plated

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.075
ANG ± 1°

照片框

ORDER INFORMATION

MISB-SWP43-5B-LF

SERIES T LEADFREE
5 PIN B TYPE
POST 4.3mm
90°SMT
FEMALE

DESCRIPTION: Micro USB , Type B , Receptacle Horizontal , Single , SMT