




Top View




Side View



Front View

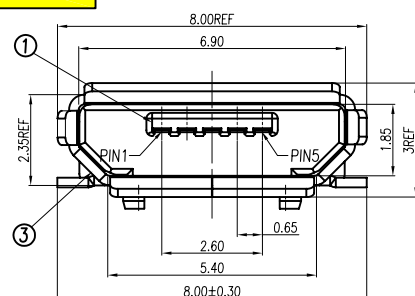


Bottom View

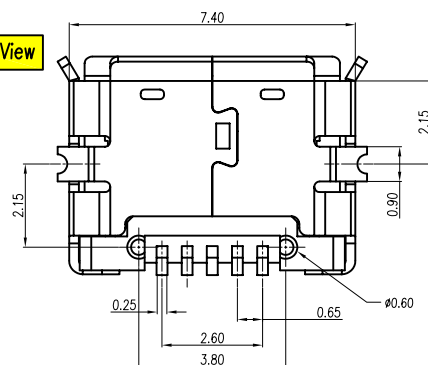

Note:

Specification:

1. Current rating: 1 A Max.
2. Dielectric withstanding voltage: 30V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Insertion force: 35 Newtons Max.
6. Extraction force: 10 Newtons Min.
7. Temperature range: -30°C~+80°C

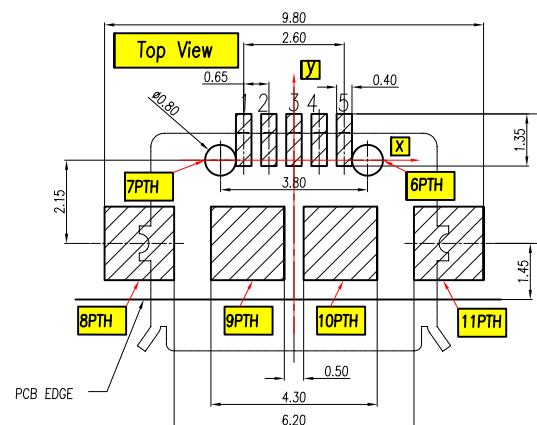

RECOMMENDED PCB LAYOUT

3	Shell	1	SUS	T=0.25mm	Nickel Plated
2	Contact	5	copper alloy	T=0.20mm	Contact area:30u"Gold Plated over 40u"Nickel min. ALL Gold Plated
1	Housing	1	LCP	UL 94-V0	Black
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

照片框

ORDER INFORMATION

MISB-SWPS30R-5B-LF
SERIES T T T T T LEADFREE
5 PIN B TYPE
REEL
SEMI GOLD 30u"
FEMALE POST
90°SMT

DESCRIPTION: MICRO USB-5PIN(F)SMT B TYPE

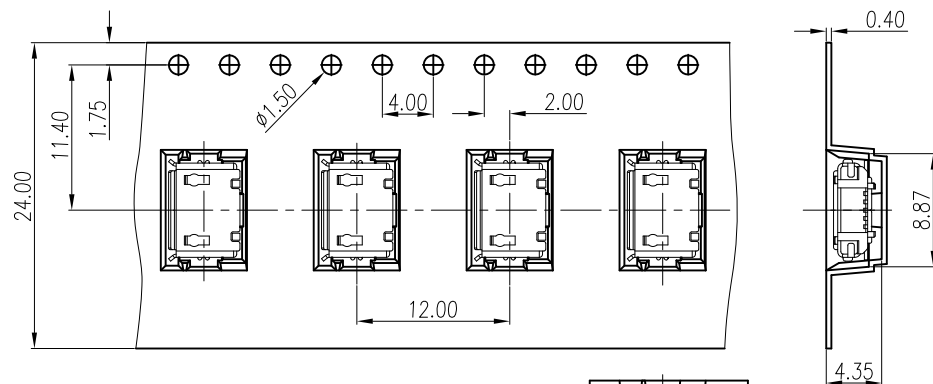

NOTES:

1.Material:

- 1.1 Carrier:Black Anti-Static Polystyrene.
- 1.2 Shipping carton:corrugated fiberboard
- 1.3 Waterproofing bag:PE

2.Dimension:


- 2.1 Carrier: Thickness:0.4±0.05mm.
- 2.2 Disk:Diameter Ø330mm.

3.Quantity:


- 3.1 Primary packing:1000 PCS/Disk(12.25 meters).
- 3.2 Secondary packing:10 Disk(10000PCS).

4. Weight:

- 4.1 NET Weight 6 Kg
- 4.2 Gross Weight 7.1 Kg

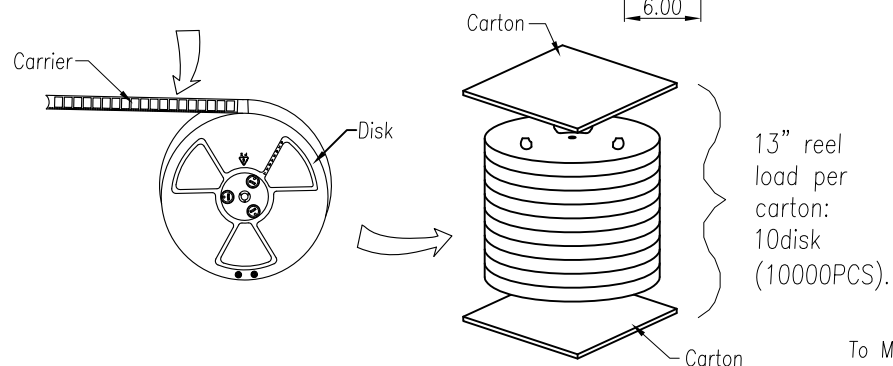

To Machine

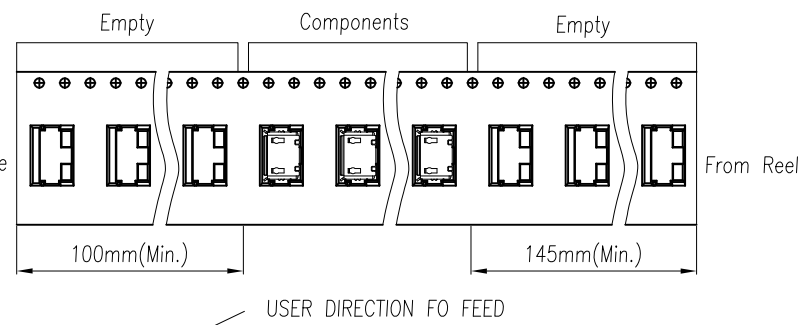

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

MISB-SWPS30R-5B-LF
SERIES T T T T T LEADFREE
FEMALE POST SEMI GOLD 30u" REEL
90°SMT 5 PIN B TYPE

DESCRIPTION: MICRO USB-5PIN(F) B TYPE SMT