



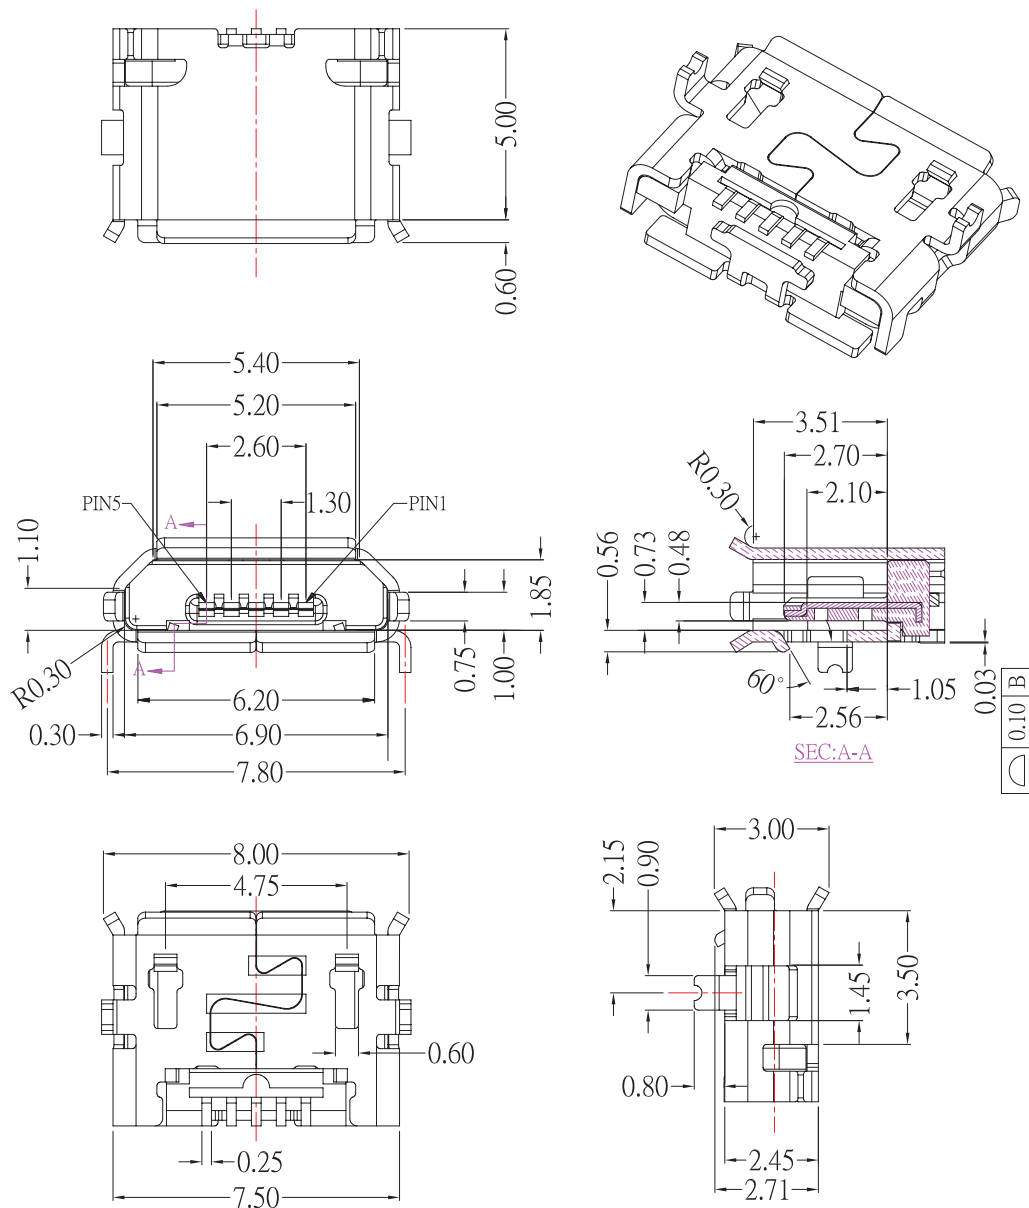

PCB LAYOUT MOUNTING PATTERN

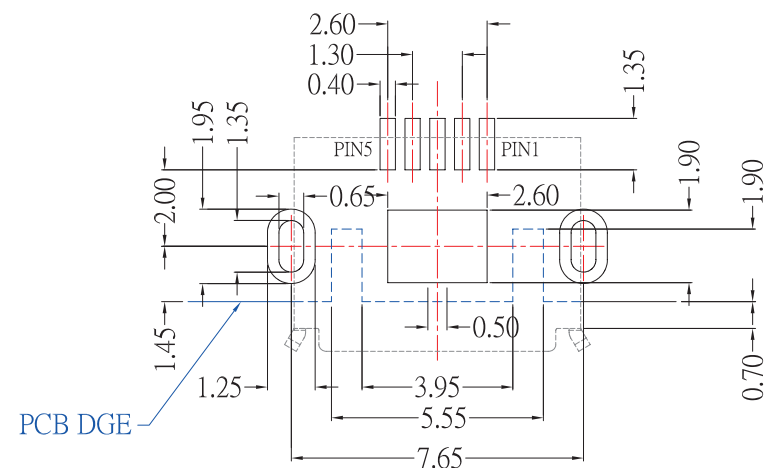

SPECIFICATIONS

Electrical:

- 1.Current Rating: 0.5A / contact terminal
- 2.Contact Resistance: 60 milliohms Max
- 3.Dielectric Withstanding Voltage:
100 V AC AT Sec Level
- 4.Insulation Resistance:
100 MEGA ohms Min @ 500 VDC

Mechanical:

- 1.Connector Mate and Unmate Force
Mate force: 3.06 kgf Max
Unmate force: 0.81 kgf Min
- 2.Durability: 10,000 cycles Min
- 3.Contact retention force: 0.21 kgf Min

Material:

- 1.Housing:
High Temperature Thermal Plastics,
UL 94V-0 , PBT , Black
- 2.Contact: Phosphor Bronze
- 3.Shell: Stainless Steel

Finish:

- 1.Contact: Plated Gold in Mating Area
Tin on Solder Balls
- 2.Shell: Sn plating over Nickel plating

RoHS Compliant

TOLERANCES ARE

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG ±

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

MISB-SWRVMR-5B-LF






SERIES | LEADFREE
5 PIN B TYPE
FEMALE | REEL
METAL FOOT
REVERSED
90°SMT

DESCRIPTION: MICRO USB B TYPE REVERSE SHELLLED DIP

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

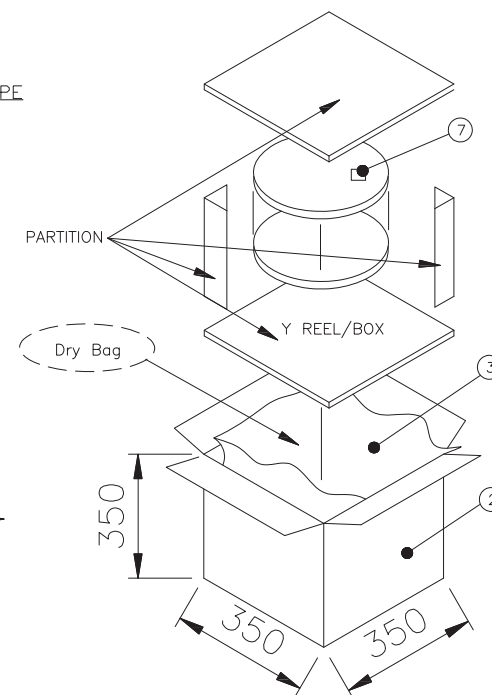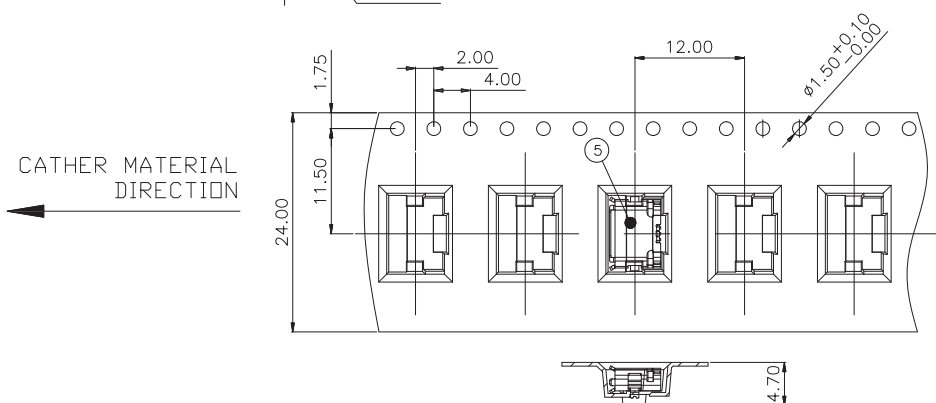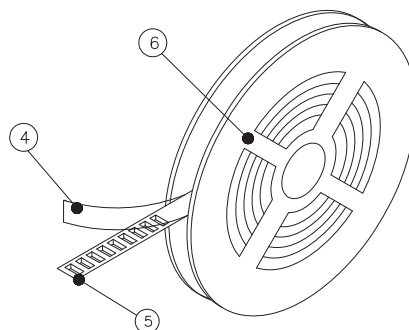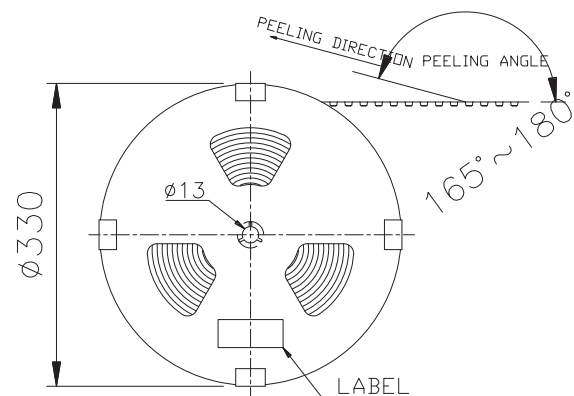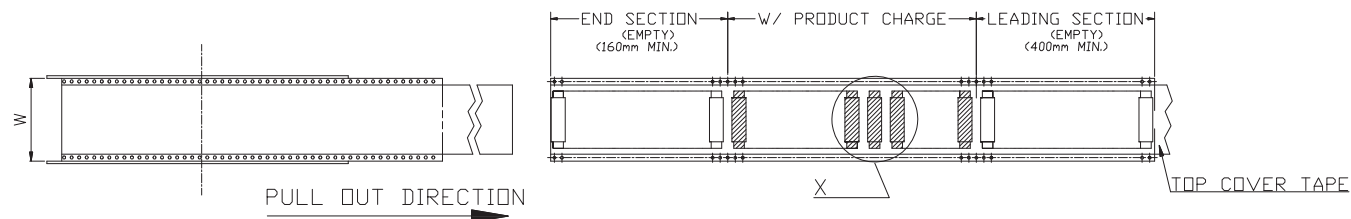

NOTES
 1.MATERIAL: PS (Color: Black)
 2.DEFORMATION & DAMAGE: NA.
 3.All dimensions meet EIA-481-C requirements.

7	LABEL	
6	CARRIER TAPE	14.5/REEL
5	COVER TAPE	Wide=16mm
4	REEL	1000PCS/REEL
3	WATERPROOF BAG	1 PCS
2	BOX	10PCS REEL/BOX
1	I/O CONNECTOR	20000 PCS/BOX
ITEM	PARTS NAME	FINISH/REMARK

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±
 .X ± 0.35
 .XX ± 0.25
 .XXX ± 0.15
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MISB-SWRVMR-5B-LF

SERIES
 FEMALE
 REEL
 METAL FOOT
 REVERSED
 90°SMT

DESCRIPTION: MICRO USB B TYPE REVERSE SHELLED DIP