
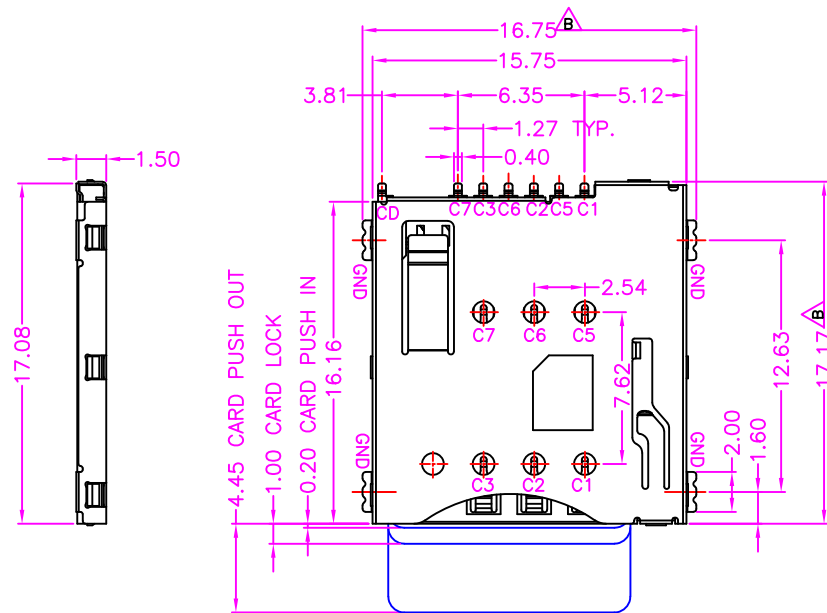


MicroSIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved

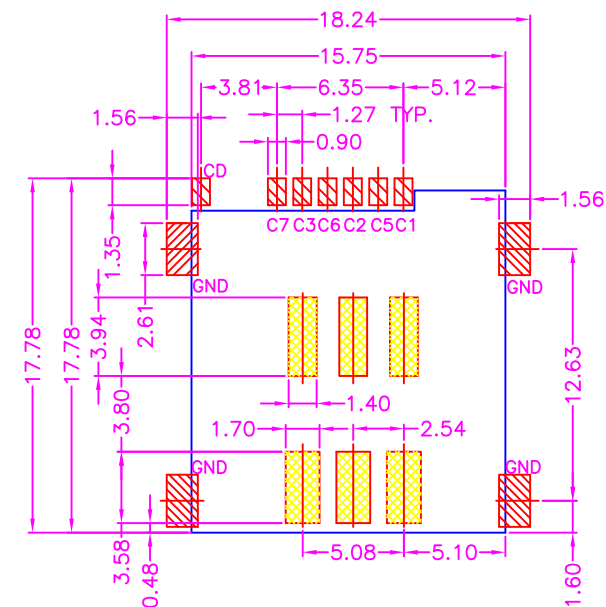

PAD AREA
 KEEP OUT AREA

P.C.B LAYOUT
TOP VIEW ± 0.05

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
 SHELL: STAINLESS STEEL, NICKEL PLATING
 SOLDER PAD: STAINLESS STEEL, GOLD PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 100m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: $-20^{\circ}\text{C} \sim +85^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
 .X $\pm$ 0.30
 .XX $\pm$ 0.20
 .XXX $\pm$ 0.10
 ANG $\pm$ 5°

照片框

ORDER INFORMATION

MISCP-W16EBA-06-LF

SERIES

LEADFREE
 06 WAY
 SWITCH CLOSED
 BOTTOM CONTACT
 EAR WIDTH 16.68mm
 90°SMT

DESCRIPTION: MICRO SIM CARD, 7PIN, PCB MOUNT, SMT, METAL SHIELD,
 PUSH PUSH TYPE, FEMALE, H=1.50mm