
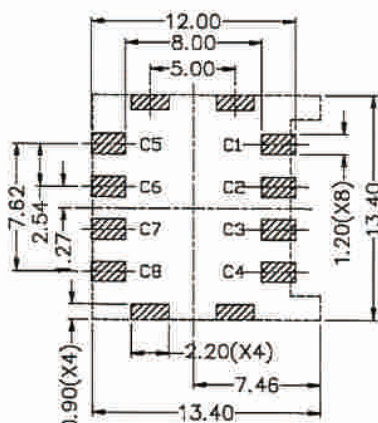






Signal interface connections for

Contact No	Assignment	Description
C1	Vcc	Power Voltage
C2	RST	Reset Signal
C3	CLK	Clocking signal
C4	RFU	Reserve for feature use
C5	GND	Power and Signal Ground
C6	Vpp	Programming Voltage
C7	I/O	Serial Data input/output
C8	RFU	Reserve for feature use

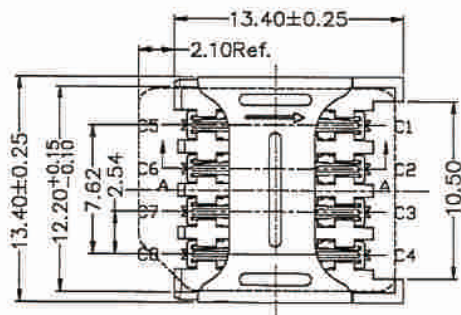

RECOMMENDED P.C.B LAYOUT
COMPONENT SIDE(TOLERANCE ±0.05)

TECHNICAL CHARACTERISTICS

1.General Characteristics

Dimensions: 13.40x13.40Wx2.40H mm

Weight: Approx. 0.5±0.1g

Durability: 5,000 cycles min.

2.Electrical Characteristics

Contact resistance: 50 mΩ typical, 100 mΩ max.

Insulation resistance: >1000 megaohms /500 VDC

3.Solderability

Vapor phase: 215°C, 30 sec. MAX.

IR reflow: 250°C, 10sec. MAX.

Manual soldering: 370°C, 3 sec. MAX.

4.Environmental Characteristics

Operating temperature: -40°C~+85°C

Operating humidity: 10%~95%RH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION


MISCT-W1024XR-08-LF

SERIES
LEADFREE
08 WAY
REEL
90°SMT
NON POST
PAD TO PAD 10mm
HIGH 2.4mm

DESCRIPTION:

1 . Embossed Tape Carrier Diagram

1.1 Carrier Dimensions Diagram

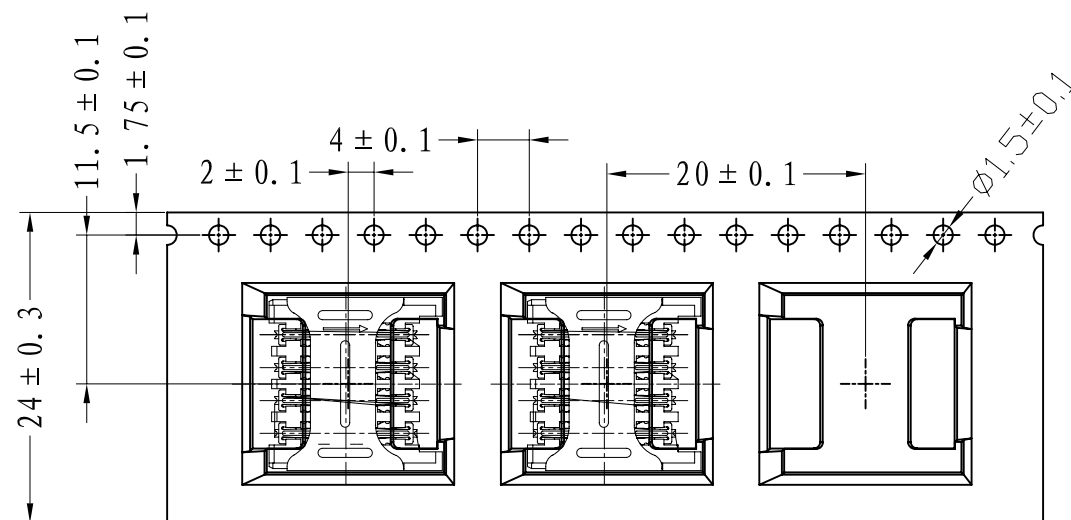

G.W.:0.80 KGS




Q y:900 pcs per Reel

G.W.:7.40KGS

Q y:7200Pcs per carton(8 Reels set in order)

Meas:35.00Lx5.00Wx1.50H cm

1.2 Reel Form Diagram

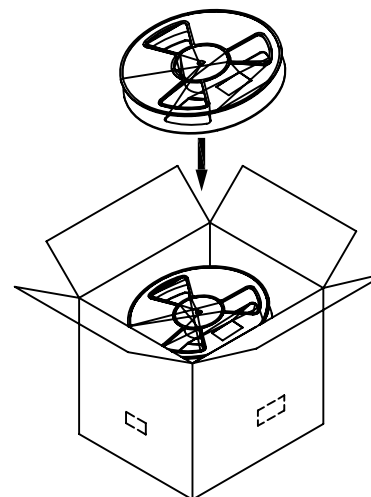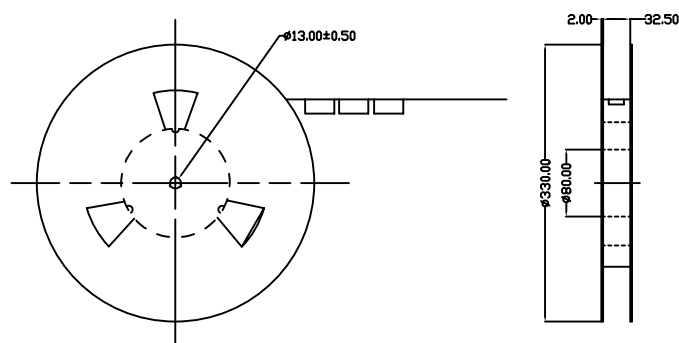

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MISCT-W1024XR-08-LF

SERIES
90°SMT
PAD TO PAD 10mm
LEADFREE
08 WAY
REEL
NON POST
HIGH 2.4mm

DESCRIPTION: