


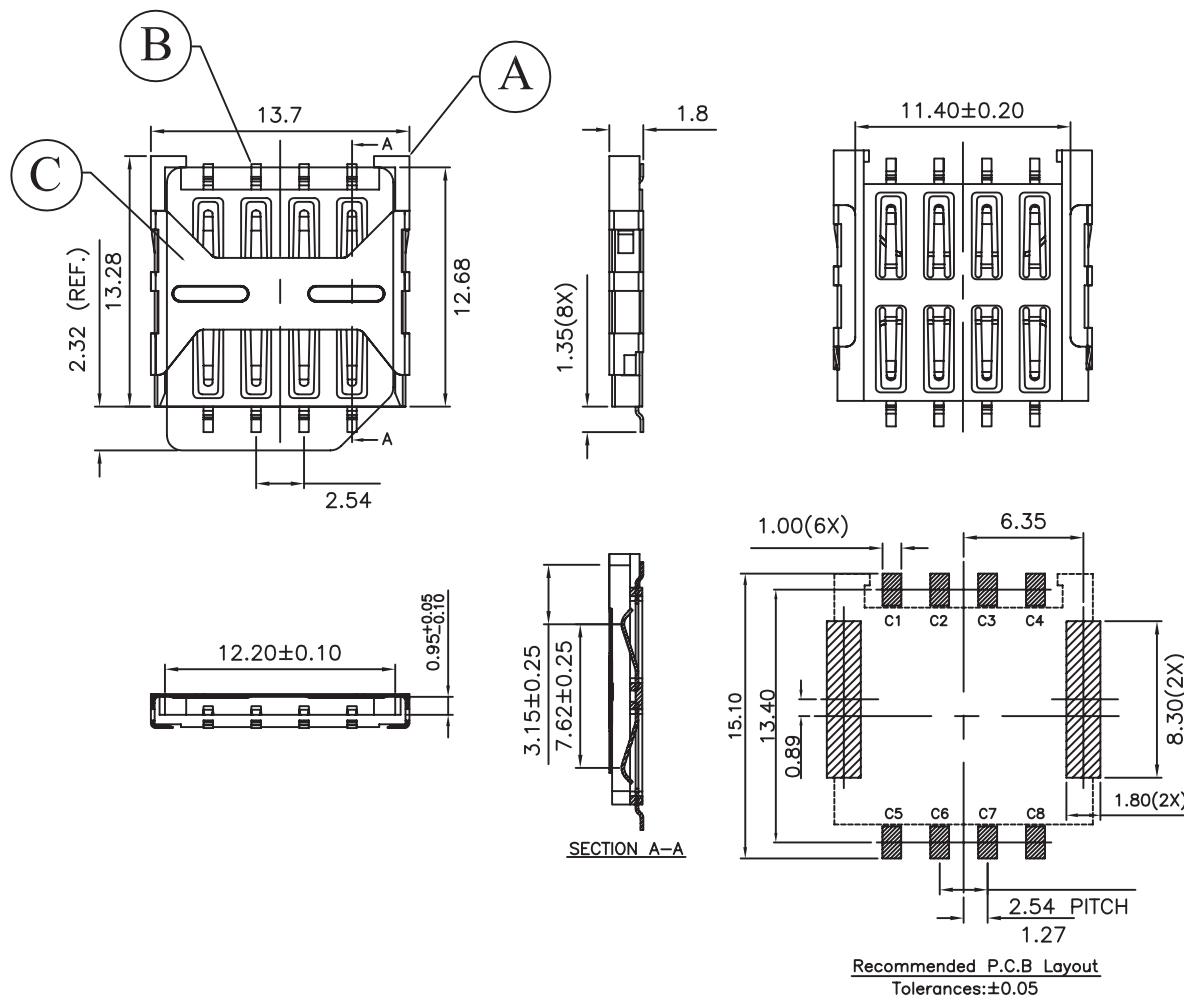

## MATERIA

Housing : LCP UL94V-0, Color:Black

Contact : Phosphor Bronze T=0.15, Contact Area: Gold Plated

Shell : Stainless Steel, Solder Tail:Gold Plated

## SPECIFICATION:

### 1. ELECTRICAL

1.1 Current Rating: 0.5A

1.2 Voltage Rating: 5VDC

1.3 Contact Resistance: 100mΩ

1.4 Insulation Resistance: 100MΩ

1.5 Dielectric Withstanding Voltage: 100VAC for 1 minute

### 2. MECHANICAL

2.1 Durability: 5000 Cycle

2.2 Contact Normal Force : 0.2N~0.6N

### 3. ENVIRONMENTAL


3.1 Operating temperature range: -40°C to +85°C

3.2 Storage temperature range: -40°C to +85°C

### 4. SOLDER ABILITY

4.1 Recommended IR Reflow Temperature: 260°C

Micro SIM Socket 8Pin SMD Type, 15u Gold Plating



RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ± 0.30  
.XX ± 0.25  
.XXX ± 0.20  
ANG ±

照片框

ORDER INFORMATION

MISCT-W1318XR-08-LF

SERIES LEADFREE  
08WAY  
REEL  
NON POST  
HIGH 1.8mm  
PAD TO PAD 13.4mm  
90°SMT

DESCRIPTION: Micro SIM Socket 8Pin SMD Type, 15u Gold Plating

**DESCRIPTION:** Micro SIM Socket 8Pin SMD Type,15u" Gold Plating