
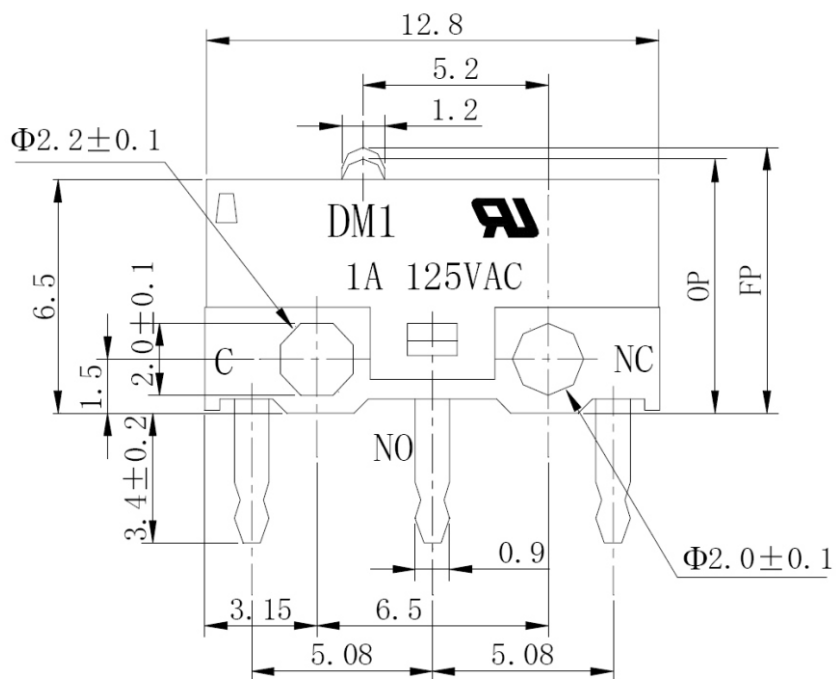


SCHEMATIC



1. 功能规格

1.1规格值	AC125V 1A/DC5V 30mA	1.5自由位置 (FP)	7.35±0.2mm
		1.6动作位置 (OP)	7.0±0.2mm
1.2接触电阻 (CR)	≤50mΩ (初始值)	1.7行程 (PT)	
1.3操作力 (OF)	60±20gf	1.8灵敏度 (BT)	
1.4回弹力 (RF)		1.9	

2. 可靠度参数

2.1机械寿命	1,000,000 CYCLES	2.5焊接工艺	手工焊
2.2电气寿命	10,000/1,000,000 CYCLES	2.6操作温度	-25° C - +65° C
2.3绝缘电阻 (IR)	≥100MΩ DC500V (初始值)	2.7储存湿度	<85%RH
2.4耐压强度 (WV)	AC500V 1 minute (初始值)	2.8	

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

MISW-D51-060-LF
 SERIES | T | LEADFREE
 60g
 PITCH 5.08mm
 DIP 180°

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X.±
 .X±
 .XX±
 .XXX±
 ANG±

DESCRIPTION: