





SCHEMATIC DIAGRAM 电路图

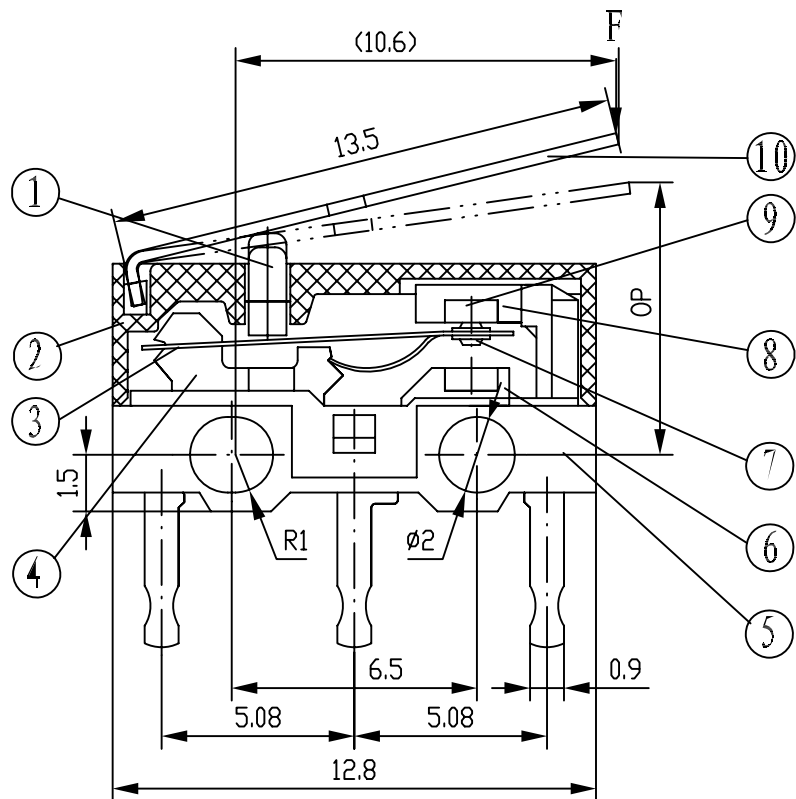

### 3. Safety authentication 安全认证



### 1. Specifications 技术特性表

|                            |                   |
|----------------------------|-------------------|
| RATINGS 额定值                | 3(0.5)A 250VAC    |
|                            | 3A 125VAC         |
| Insulation resistance 绝缘电阻 | $\geq 100M\Omega$ |
| Test voltage 耐电压           | AC1000V           |
| Contact resistance 接触电阻    | $\leq 50m\Omega$  |
| Operating force 动作力        | $\leq 0.23N$      |
| Operating Position 动作位置    | $7 \pm 1.2mm$     |
| Electrical life 电气寿命       | 10,000 MIN        |

### 2. Parts List 零件材质表

| No. | Name 名称          | Material 材料                           |
|-----|------------------|---------------------------------------|
| 1   | Plunger 开关子      | Plastic PBT4308(白色) 工程塑料              |
| 2   | Cover 盖          | Plastic PBT4308(黑色) 工程塑料              |
| 3   | Moving piece 可动片 | Beryllium alloy QBe2 铍青铜              |
| 4   | Support 支架       | Brass alloy H65, Silver plated 黄铜, 镀银 |
| 5   | Case 基座          | Plastic PBT4308(白色) 工程塑料              |
| 6   | NO Terminal 常开端子 | Brass alloy H65, Silver plated 黄铜, 镀银 |
| 7   | Contact 电触点      | AgNi10 银-镍                            |
| 8   | NC Terminal 常闭端子 | Brass alloy H65, Silver plated 黄铜, 镀银 |
| 9   | Contact 电触点      | AgNi10 银-镍                            |
| 10  | Moving arm 动臂    | Stainless steel SUS301 不锈钢            |

照片框

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

ORDER INFORMATION

MISW-D51L13-023-LF

SERIES

LEADFREE

23g

LEVEL 13.5mm

CONTACT PITCH 5.08mm

DIP 180°

DESCRIPTION: Micro Switch