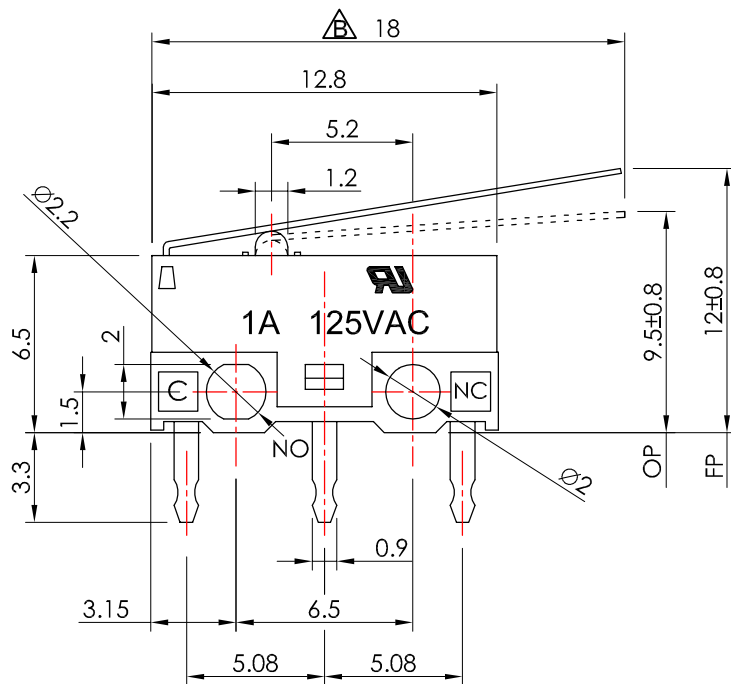


SPECIFICATION

Rating: 1A 125V AC / 30mA 5V DC.

Contact resistance: $\leq 100\text{m}\Omega$ (Initial).

Operating force: $35\pm 15\text{g}$.

Mechanical life: 500,000 Cycles.

Electrical life: 30,000 / 500,000 Cycles. $\triangle$

Insulation resistance: $\geq 100\text{M}\Omega$ 500V DC (initial).


Withstand voltage: 500V AC 1 minute (Initial).

Operating temperature: $-15^{\circ}\text{C} \sim +55^{\circ}\text{C}$.

Ambient humidity: $< 85\% \text{RH}$.

Soldering temperature: 220°C Max for 3 Sec. $\triangle$

SCHEMATIC

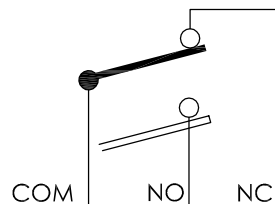

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION $\rightarrow$

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$

照片框

ORDER INFORMATION

MISW-D51L18-035-LF

SERIES

LEADFREE

35g

LEVEL 18mm

PITCH: 5.08mm

DIP 180°

DESCRIPTION: Miniature Micro Switch