

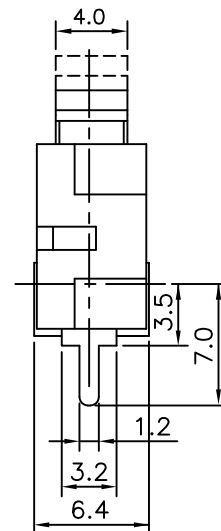


SWITCH TYPE	Micro Switches	MODEL NO.	MISW-D87L15-040
1. Functional spec.			
1.1 Rated Voltage	250VAC	1.6 Free Position	16.7 ±0.8mm
1.2 Rated Current	3A	1.7 Operating Position	14.5 ±0.8mm
1.3 Contact Resistance	≤50mΩ (Initial value)	1.8 Position Travel	
1.4 Operating Force	40±20gf	1.9 Return Force	
1.5 Bounce Time		1.10	
2. Reliable Rating			
2.1 Mechanical Life	100000 CYCLES	2.5 Soldering Temper	See sheet 5
2.2 Electrical Life	10000 CYCLES	2.6 Operating Temper	-15℃ - +70℃
2.3 Insulation Resistance	≥100MΩ DC500V (Initial value)	2.7 Shipping Temper	-25℃ - +85℃
2.4 Withstand Voltage	AC1000V 1 minute(Initial value)	2.8 Ambient Humidity Used	<85%RH

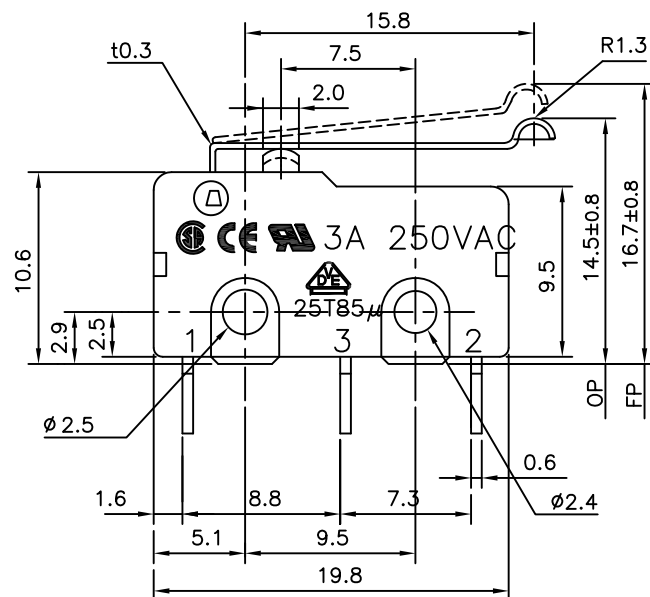

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

MISW-D87L15-040-LF

SERIES LEADFREE

40g

LEVEL 15.8mm

CONTACT PITCH 8.8+7.3mm

DIP 180°

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE _____

SIZE A4

PPOJECTION 

 $X_{\pm}$ $\chi_{\pm}$ $\cdot XX \pm$ $.XXX \pm$

ANG ±