
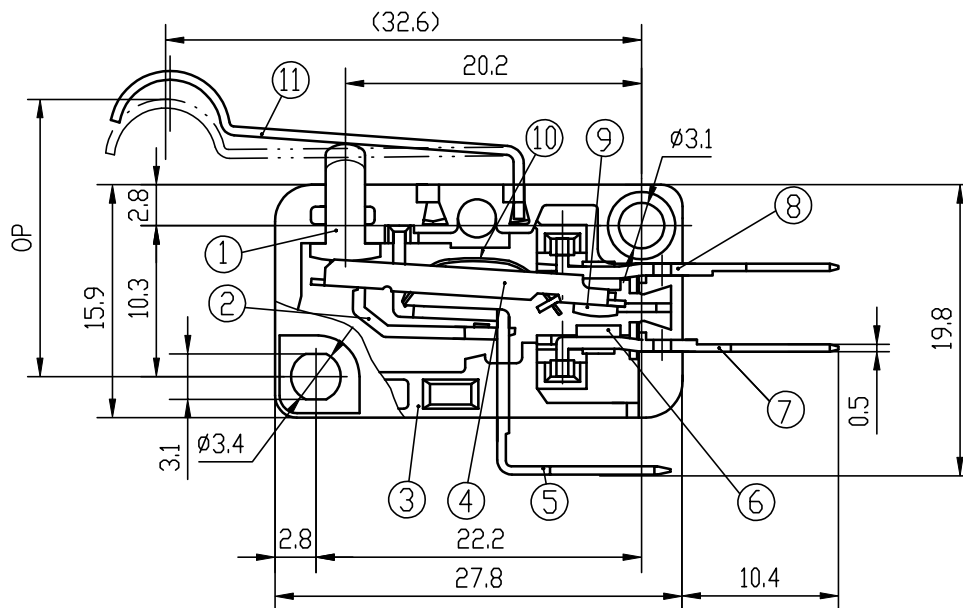


SCHEMATIC DIAGRAM



1. Specifications 技术特性表

RATINGS 额定值 ELECTRONICAL LIFE 电气寿命 TEMPERATURE 温度等级	10GPA 125/250VAC μ 40T105 5E4 6A 30VDC
	10(3)A 125/250VAC μ 40T105 5E4 6A 30VDC 40T105 5E4
	10(3)A 250VAC μ 10T105 5E4
INSULATION STRENGTH 绝缘电阻	100M Ω MIN
TEST VOLTAGE 耐电压	AC1000V/2000V
CONTACT RESISTANCE 接触电阻	50m Ω MAX
OPERATING FORCE 动作力	0.54N MAX
RELEASE FORCE 恢复力	0.1N MIN
OPERATING POSITION 动作位置	19.5 $\pm$ 1.2mm
MOVEMENT DIFFERENTIAL 差动行程	1mm MAX

2. Parts List 零件材质表

No.	Name 名称	Material 材料
1	BUTTON 开关子	Bakelite PF2A5-151 黑色 电木粉
2	LEVER 杠杆	Brass alloy H62, Silver plated 黄铜, 镀银
3	CASE 基座	Plastic PBT(灰色) 工程塑料
4	PLATE MOVING 可动片	Brass alloy H62, Silver plated 黄铜, 镀银
5	TERMINAL 支架	Brass alloy H65, Silver plated 黄铜, 镀银
6	CONTACT 静触点	AgNi10/Cu 银-镍/铜
7	TERMINAL 端子	Brass alloy H65, Silver plated 黄铜, 镀银
8	TERMINAL 端子	Brass alloy H65, Silver plated 黄铜, 镀银
9	CONTACT 动触点	AgNi10/Cu 银-镍/铜
10	SPRING 簧片	Beryllium alloy QBe2 铍青铜
11	MOVING ARMS 动臂	Stainless steel 不锈钢
12	COVER 盖	Plastic PBT(灰色) 工程塑料

3. Safety authentication 安全认证



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

MISW-Q4C-100-LF

SERIES

LEADFREE

100g

4.7mm TAB x 3pin

DESCRIPTION: MICRO SWITCH