

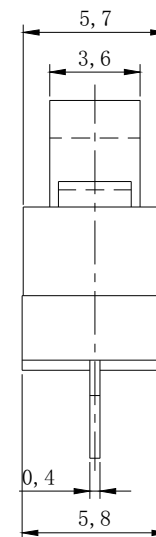


类 型	压接微动开关	品 名	
1. 功能规格			
1.1 额定电压	125VAC / 250VAC	1.6 自由位置 (FP)	12.8±0.8mm
1.2 额定电流	3A/1.5A	1.7 动作位置 (OP)	10.8±0.8mm
1.3 接触电阻 (CR)	≤100mΩ (初始值)	1.8 行程 (PT)	
1.4 操作力 (OF)	30gf	1.9 灵敏度 (BT)	
1.5 回弹力 (RF)		1.10	
2. 可靠度参数			
2.1 机械寿命	500,000 CYCLES	2.5 焊接工艺	手工焊
2.2 电气寿命	10,000 CYCLES	2.6 操作温度	-25° C - +65° C
2.3 绝缘电阻 (IR)	≥100MΩ DC500V (初始值)	2.7 储存湿度	<85%RH
2.4 耐压强度 (WV)	AC500V 1 minute (初始值)	2.8	

3. 尺寸规格图

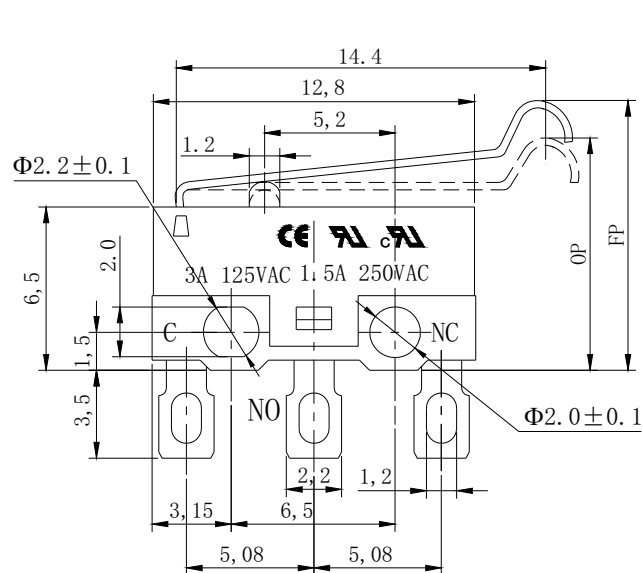

SCHEMATIC



煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X.±

.X±

.XX±

.XXX±

ANG±

PPOJECTION

照片框

ORDER INFORMATION

MISW-S51L14J-030-LF

SERIES

LEADFREE

30g

J TYPE

LEVEL 14.4mm

CONTACT PITCH 5.08mm

SOLDER

DESCRIPTION: