

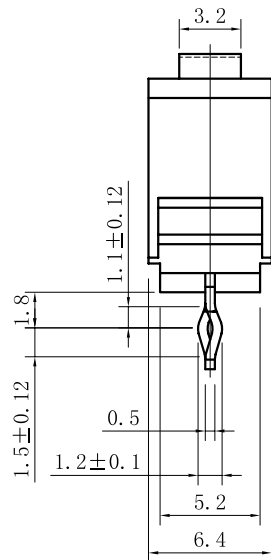


SWITCH TYPE	Micro Switches		
1. Functional spec.			
1.1 Rated Voltage	125/250VAC	1.6 Free Position	12. 2±0. 4mm
1.2 Rated Current	3A, 0. 1A	1.7 Operating Position	11. 8±0. 4mm
1.3 Contact Resistance	≤100m Ω(Initial value)	1.8 Position Travel	
1.4 Operating Force		1.9 Return Force	
1.5 Bounce Time		1.10	
2.Reliable Rating			
2.1 Mechanical Life	100, 000 CYCLES	2.5 Soldering Technic	Hand Soldering
2.2 Electrical Life	10, 000 CYCLES	2.6 Operating Temper	-25℃ - +85℃
2.3 Insulation Resistance	≥100M Ω DC500V	2.7 Ambient Humidity Used	<85%RH
2.4 Withstand Voltage	AC1500V 1 minute	2.8	

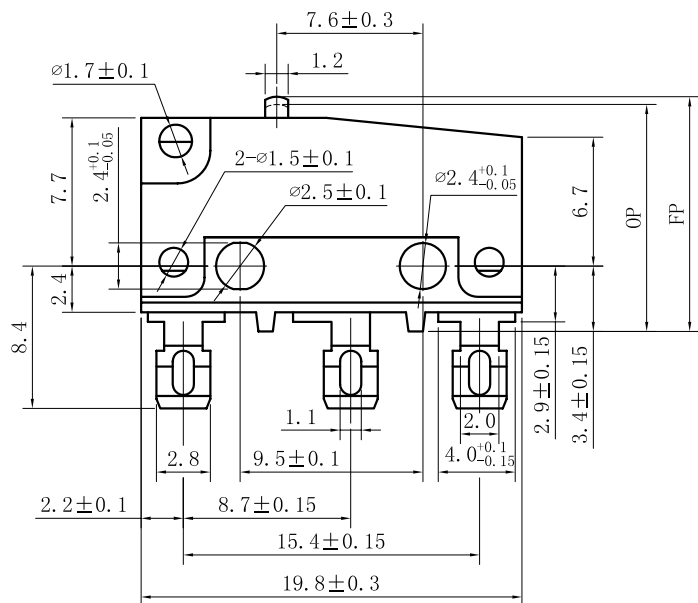

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MISW-S86PP-xxx-LF

SERIES

LEADFREE

030:30g

040:40g

DIP 180°

PITCH:8.7mm+6.7mm

POST

PRESS FIT

DESCRIPTION: