
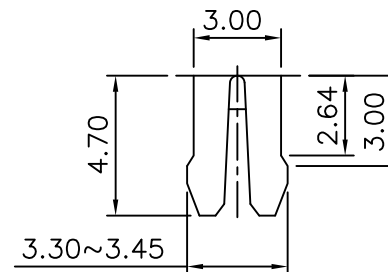
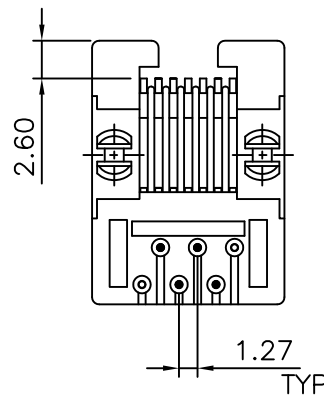
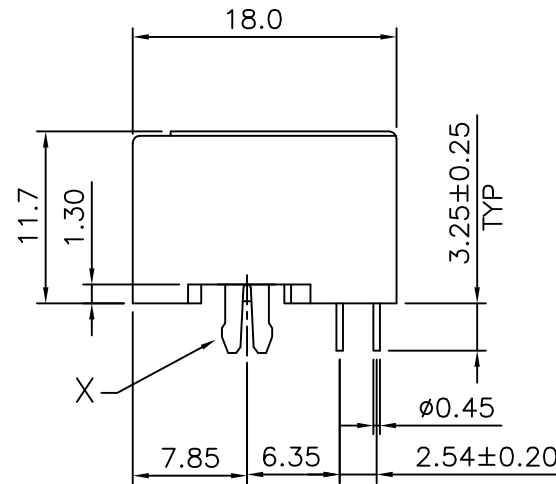



MATERIAL:

- HOUSING—DSM STANYL TE250F (NYLON-46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL94V-0
- CONTACTS—0.45mm DIAMETER PHOS-BRONZE
PLATED WITH HARD GOLD.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

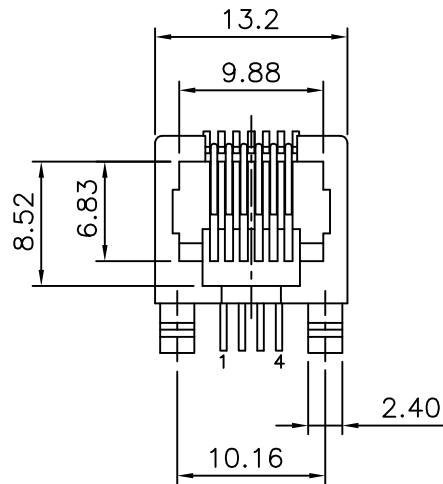

DETAIL X

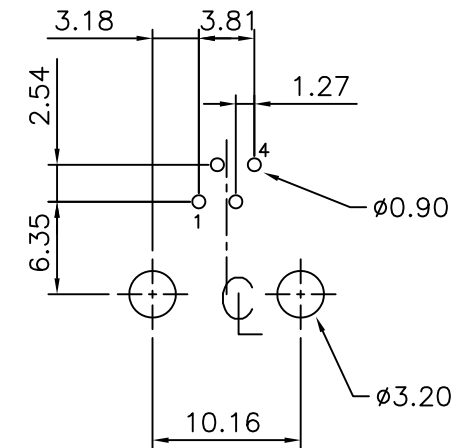

PC Board Layout
Ref.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MJ11-KX06-0604-LF
SERIES 6P4C LEADFREE
06u" GOLD
NON EAR
BLACK

DESCRIPTION: 6POSITION, SIDE ENTRY, VERY LOW PROFILE, PCB JACK