

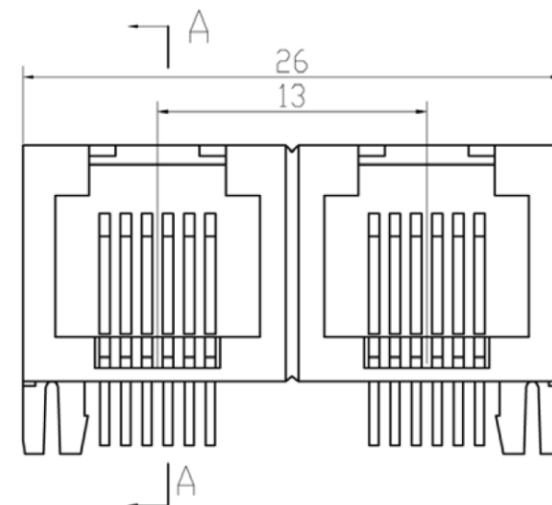
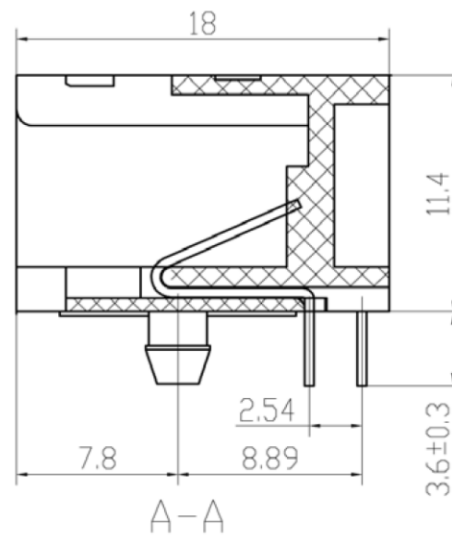
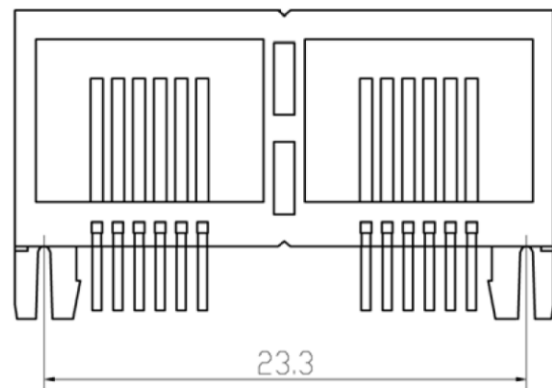


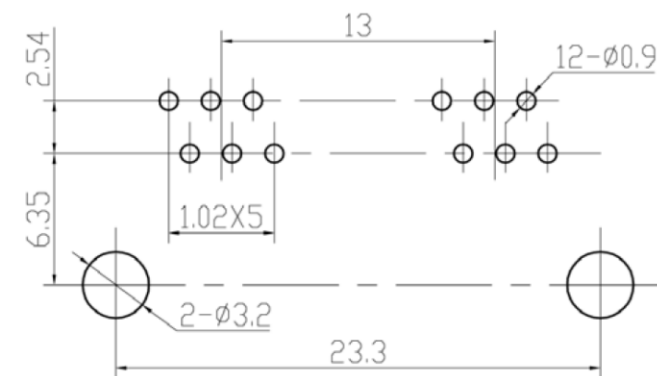

PCB JACK Specification

1. Insulation Resistance: 500M Ω MIN @ 500 VDC
2. Withstanding Voltage: AC1000V 50Hz or 60Hz 1min.
3. Durability: 600 Mating Circles MIN.
4. Gold Plating: (3;6;15;30;50) μ inch
5. Tolerances Unless Otherwise Specified

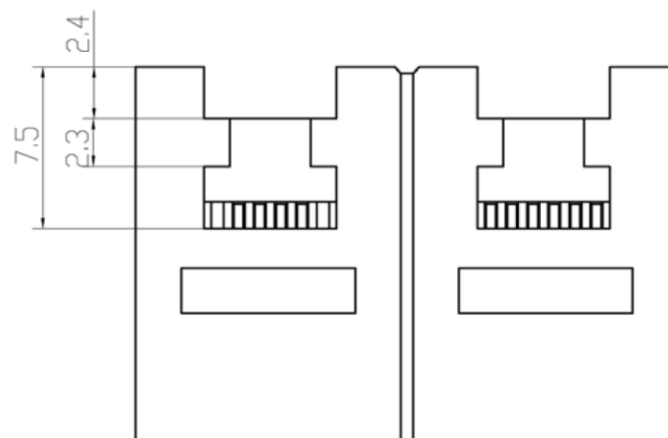

PC Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.25
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$

照片框

ORDER INFORMATION

MJ11UA2-KX06-0606-LF

SERIES

6P6C

06 μ " GOLD

NON EAR

BLACK

LEADFREE

DESCRIPTION: