

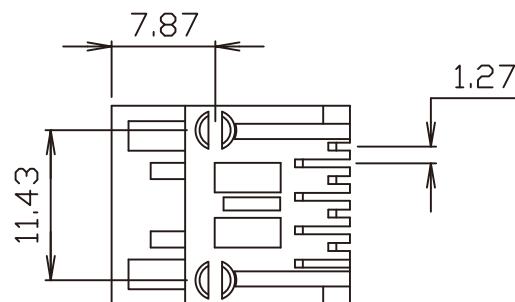
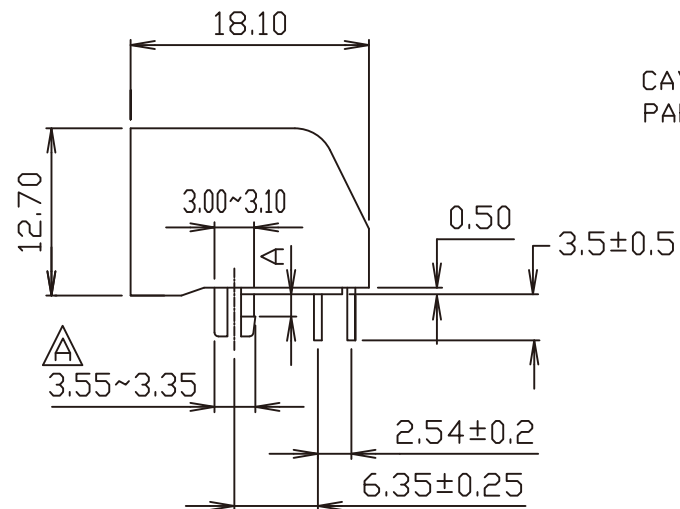


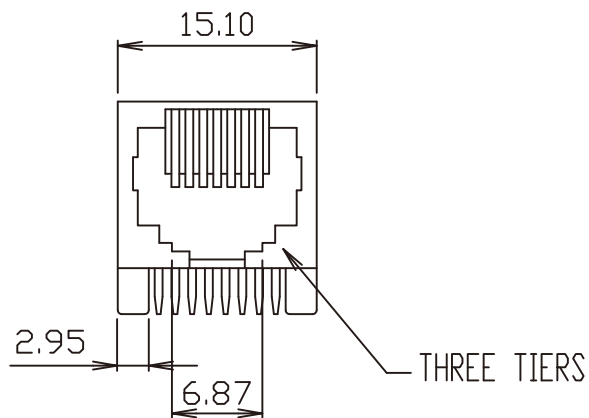

MATERIAL: HOUSING-PBT POLYESTER UL-94V-0
 MIXED GLASS FIBER,
 STANDARD COLOR-BLACK
 CONTACTS-0.35mm THICK PHOS-BRONZE
 PLATED WITH HARD GOLD AND
 TIN IN SOLDER AREA.
 OPERATING TEMPERATURE:-40°C+85°C
 CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
 PART 68,SUBPART F.

REVISIONS			
LTR	DESCRIPTION	DATE	APP
A	3.40±0.05	09/21/'00	

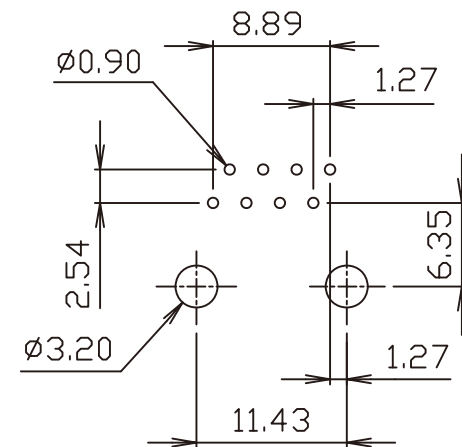

PC Board Layout

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

PJECTION

TOLERANCES ARE

X. ±
 .X ± 0.25
 .XX ± 0.13
 .XXX ± 0.05
 ANG ±



ORDER INFORMATION

MJ12J-KX06-0808-LF

SERIES 8P8C LEADFREE
 06:GOLD 6u"
 NON EAR
 BLACK

DESCRIPTION: 8 POSITION FLANGED LOW PROFILE SIDE ENTRY PCB JACK