

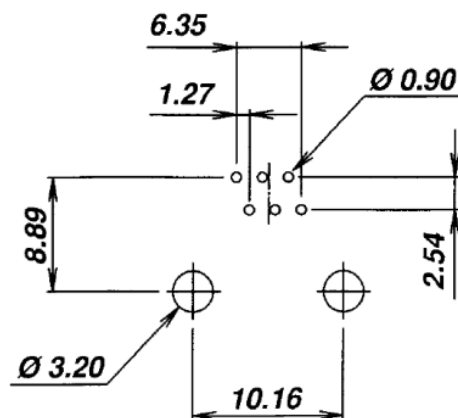
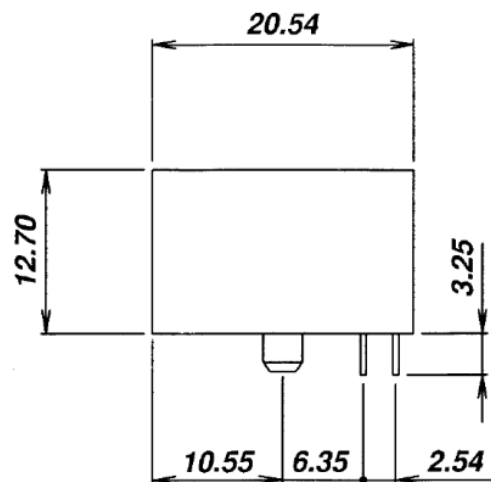


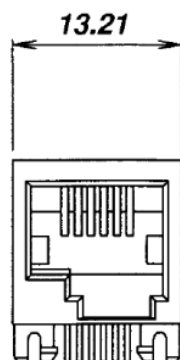

PCB LAYOUT  
(Top View)



## SPECIFICATION :

### 1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.  
Contact Resistance : 20milli-Ohm Max.  
Rating Current : 1.5A Max.  
Rating Voltage : 120V AC  
Dielectric Voltage : 1,000 RMS 60 Sec. Min.

### 2. Physical Char.

Housing : PBT Glass Filled (UL 94V-0)  
Color : Black Color  
Spring Wire : 0.45mm Dia. Phosphor Bronze  
Gold Plating Over Nickel  
Temperature Range : - 25 +90 C  
Durability : 500 Mating cycles Min.

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

照片框

ORDER INFORMATION

MJ12L-KX06-0606D-LF

SERIES

6P6C

06u" GOLD

NON EAR

BLACK

LEADFREE  
D KEY

DESCRIPTION: 6POSITION SIDE ENTRY PCB JACK