
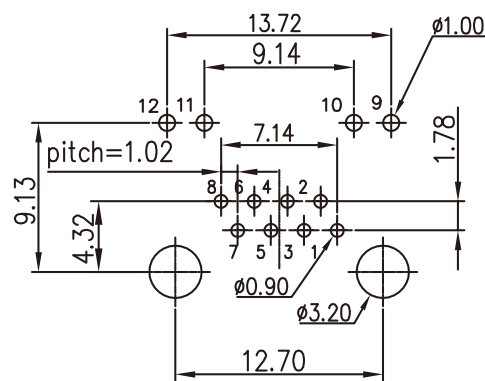
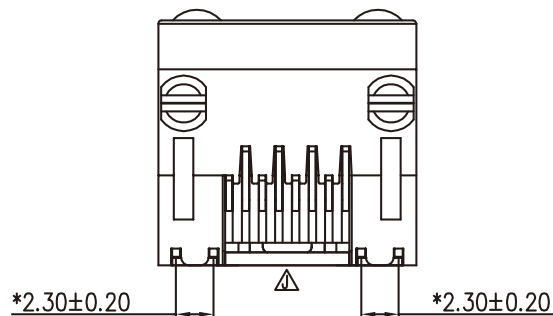
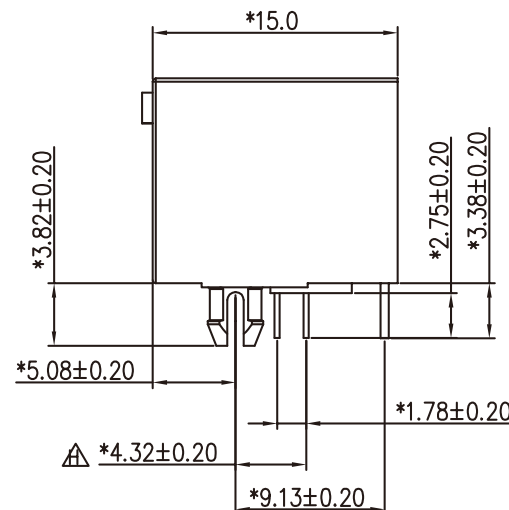


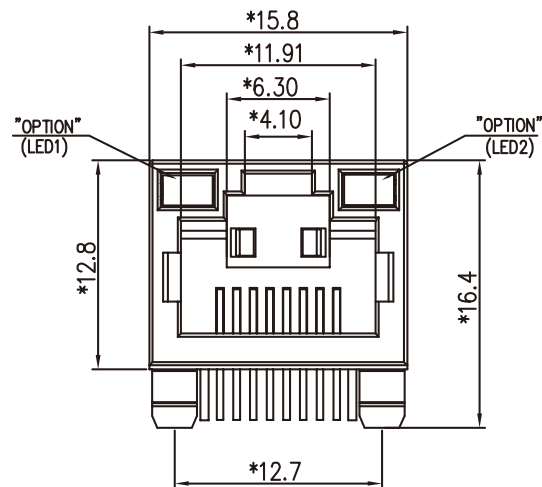

PCB Layout
Component Side Shown

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN. @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.
- LED RATINGS: FORWARD VOLTAGE: 2.2 VOLTS TYPICAL.
REVERSE VOLTAGE: 5 VOLTS MAXIMUM.

7. OPERATING: 5000 CYCLES MIN.


MECHANICAL:

- HOUSING MATERIAL : HIGH TEMP. UL94V-0
- CONTACT MATERIAL : PHOSPHOR BRONZE $t=0.30\text{mm}$.
- BACK PLATE MATERIAL : GLASS FILLED POLYESTER UL94V-0 BK.
- LED SIZE : $7 \times 3.05 \times 1.85$, $P=2.54\text{mm}$.
- PLATING : GOLD PLATING OVER NICKEL.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO $+85^{\circ}\text{C}$.
- OPERATION: : -40°C TO $+85^{\circ}\text{C}$.
- WAVE SOLDERING TEMPERATURE: $255 \sim 265^{\circ}\text{C}$ (5~10 SECONDS)

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

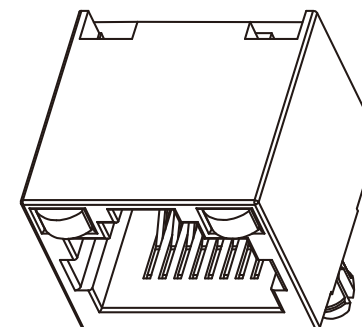

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.20
X. ± 0.15
.XX ± 0.10
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

MJ13AUL-KX06xx-0808-LF

SERIES

LEADFREE

8P8C

GY:LED1: GREEN / LED2:YELLOW
YG:LED1: YELLOW / LED2:GREEN

BLACK 06u" GOLD
NON EAR

DESCRIPTION: