
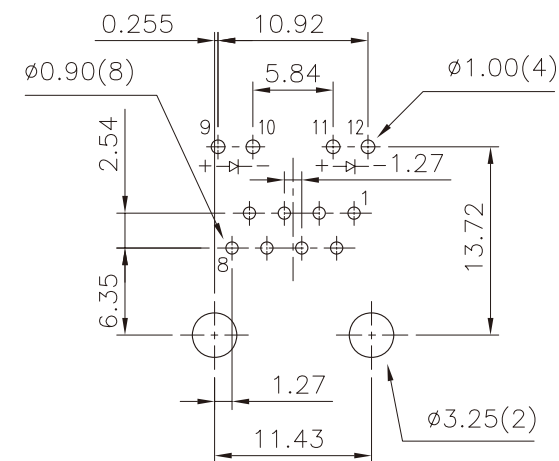
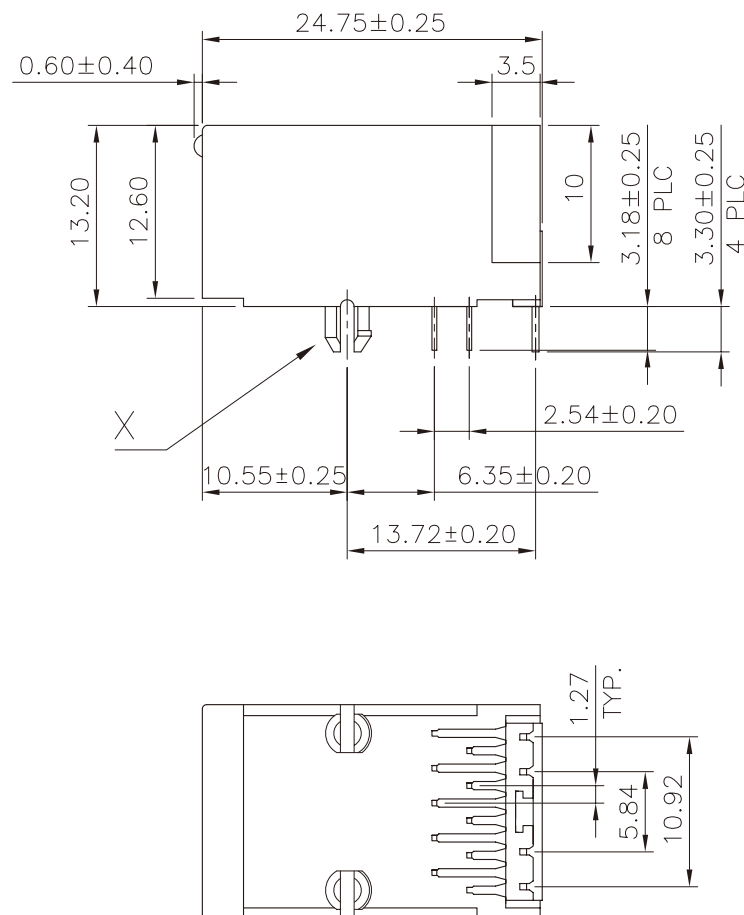




MORETHANALL PCB CONNECTORS Cable ASSEMBLIES 煜倫股份有限公司 www.morethanall.com		RoHS Compliant		TOLERANCES ARE		照片框	ORDER INFORMATION			
DRAWING BY CY		X. ±		MJ13T25UL-KX30GR-0808-LF						
CHECKED BY GENIUS		.X ±		SERIES			LEADFREE			
UNIT / mm		.XX ±					8P8C			
SCALE 1:1		.XXX ±					GREEN / RED			
DATE		ANG ±					30u" GOLD			
SIZE A4		PPOJECTION				NON EAR				
						BLACK				
DESCRIPTION: SINGLE PORT RJ45 WITH LED'S SHIELDLESS DIP TYPE SIDE ENTRY										

TRANSFORMER TYPE 1


Specification :

Item	Parameter	Condition	Min.	Typ.	Max.	Unit	REMARK
1	Insertion loss	1-100 MHz			-1	dB	
2	Return loss	1-30 MHz	-20			dB	
		30-60 MHz	-15			dB	
		60-80 MHz	-12			dB	
3	Primary Inductance @100KHz, 0.1Vrms, 8mA DC BIAS	(J1-J2), (J3-J6)	350			μ H	
4	Crosstalk	1-100 MHz	-35			dB	
5	Hipot	Vrms	1.5			kV	
6	COMMON MODE REJECTION	1-100 MHz	-35			dB	

* OPERATING TEMPERATURE RANGE: 0°C TO +70°C.

CONNECTOR 80LDER SIDE

RJ45
CONTACT SIDE

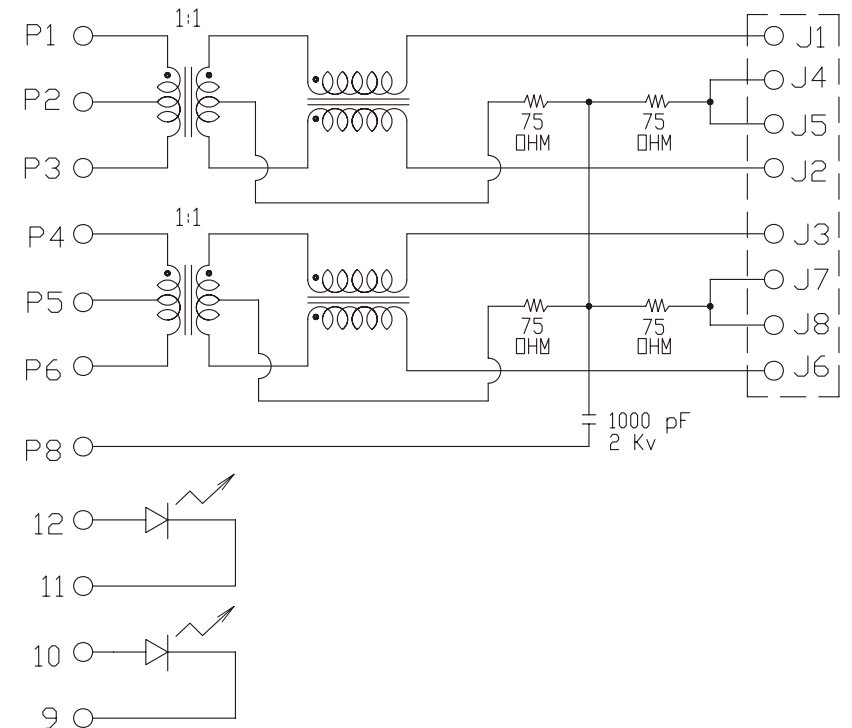

CONNECTOR SCHEMATIC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

MJ13T25UL-KX30GR-0808-LF

SERIES

LEADFREE

8P8C
GREEN / RED
30u" GOLD
NON EAR
BLACK

DESCRIPTION: TRANSFORMER TYPE 1 SPECIFICATION