



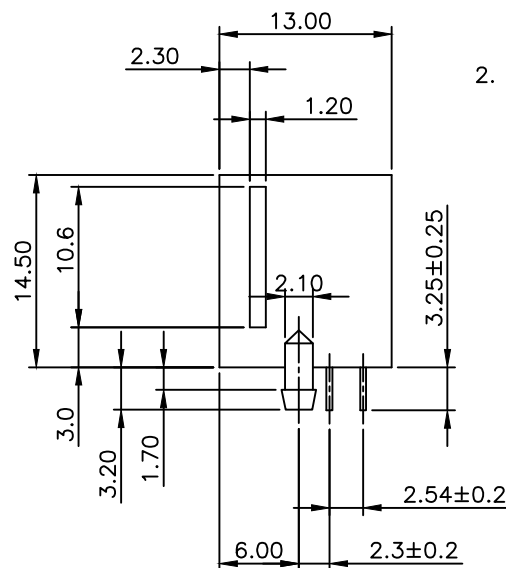

2.1 CONTACTS: GOLD PLATED ON ENTIRE CONTACT,
1.27 μ m [50 μ "] MIN. NICKEL
UNDERPLATED OVERALL.

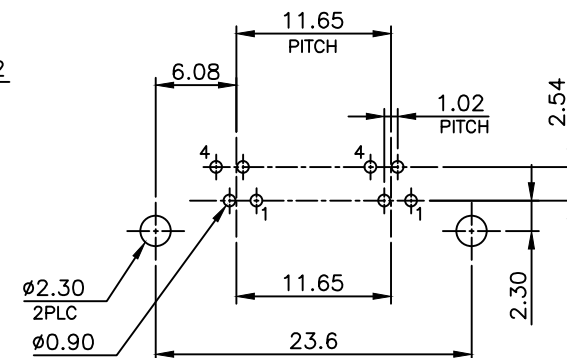

RECOMMENDED PCB LAYOUT
PCB THICKNESS: 1.6mm
TOLERANCE: $\pm 0.05\text{mm}$ (TOP VIEW)

DESCRIPTION: RJ11, GANGED JACK, MINI LOW PROFILE,
SIDE ENTRY, FROM 2PORTS UP

DESCRIPTION:	RJ11, GANGED JACK, MINI LOW PROFILE, SIDE ENTRY. FROM 2PORTS UP
--------------	--