

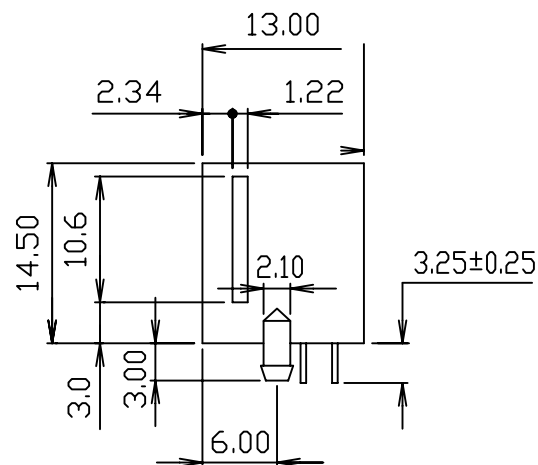
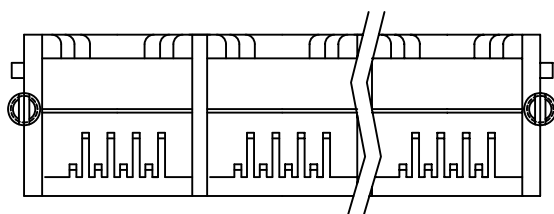


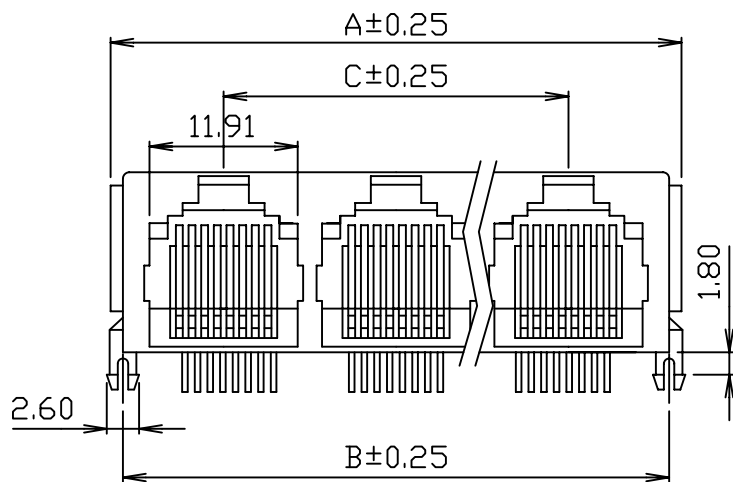

$A = 14.5(m/m)XP + 3.1(m/m)$
 $B = 14.5(m/m)XP + 0.5(m/m)$
 $C = 14.5(m/m)X(P-1)$
 $P = \text{NUMBER OF PORTS}$

MATERIAL:
 • HOUSING-PBT POLYESTER UL94V-0
 MIXED GLASS FIBER.
 STANDARD ODDOR-GRAY.
 • CONTACTS-0.45mm DIAMETER PHOS-BRONZE
 PLATED WITH HARD GOLD.
 CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
 PART 68,SUBPART F.

REVISIONS			
LTR	DESCRIPTION	DATE	APP
△	2.5	07/19/'03	

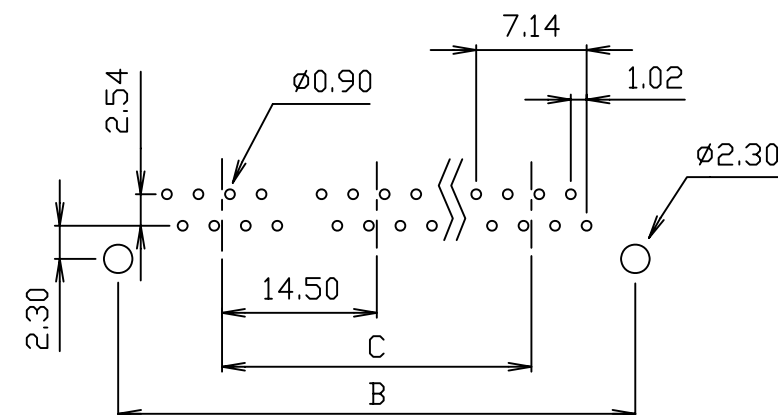

PC Board Layout
Ref.

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

$X \pm$
 $.X \pm 0.25$
 $.XX \pm 0.13$
 $.XXX \pm 0.05$
 $ANG \pm$

PPOJECTION

照片框

ORDER INFORMATION

MJ14Ax-GE06-0808-LF

SERIES

2:2 PORTS
 3:3 PORTS

LEADFREE

8P8C
 06u" GOLD
 EAR
 GRAY

DESCRIPTION:RJ45, GANGED, MINI LOW PROFILE SIDE ENTRY PCB JACK, FROM 2PORTS UP