
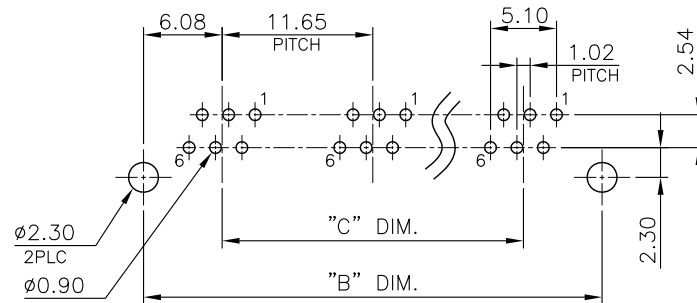


NOTE:
CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

- MATERIAL:
 - HOUSING: PBT, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-BLACK.
 - CONTACTS: PHOSPHOR BRONZE.
- FINISH:
 - CONTACTS: GOLD PLATED ON ENTIRE CONTACT, 1.27μm [50μ'] MIN. NICKEL UNDERPLATED OVERALL.

PORTS	"A" DIM.	"B" DIM.	"C" DIM.
2	23.9	23.6	11.65
3	35.55	35.25	23.3
4	47.2	46.9	34.95
5	58.85	58.55	46.6
6	70.5	70.2	58.25
7	82.15	81.85	69.9
8	93.8	93.5	81.55
9	105.45	105.15	93.2
10	117.1	116.8	104.85
11	128.75	128.45	116.5
12	140.4	140.1	128.15

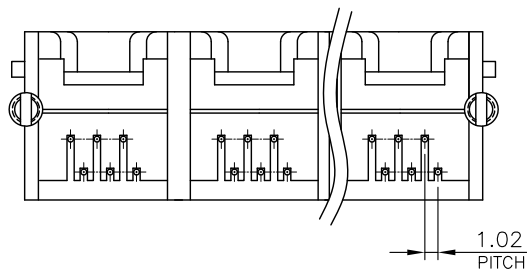

RECOMMENDED PCB LAYOUT
PCB THICKNESS: 1.6mm
TOLERANCE: ±0.05mm (TOP VIEW)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE

0 PLC ± -
1 PLC ± 0.25
2 PLC ± 0.13
3 PLC ± 0.05
ANGLES ± -

照片框

ORDER INFORMATION

MJ14Ax-KE06-0606-LF
SERIES LEADFREE
2:2 PORTS 6P6C
EAR 06u" GOLD
BLACK

www.morethanall.com

SIZE A4

PJECTION

DESCRIPTION: RJ11, GANGED JACK, MINI LOW PROFILE, SIDE ENTRY, FROM 2PORTS UP