NOTE:

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

1. MATERIAL:
   1.1 HOUSING: PBT, WITH GLASS FIBER, UL94V-0,
   1.2 CONTACTS: PHOSPHOR BRONZE.

2. FINISH:
   2.1 CONTACTS: GOLD PLATED ON ENTIRE CONTACT, 1.27μm [50μ″] MIN. NICKEL UNDERPLATED OVERALL.

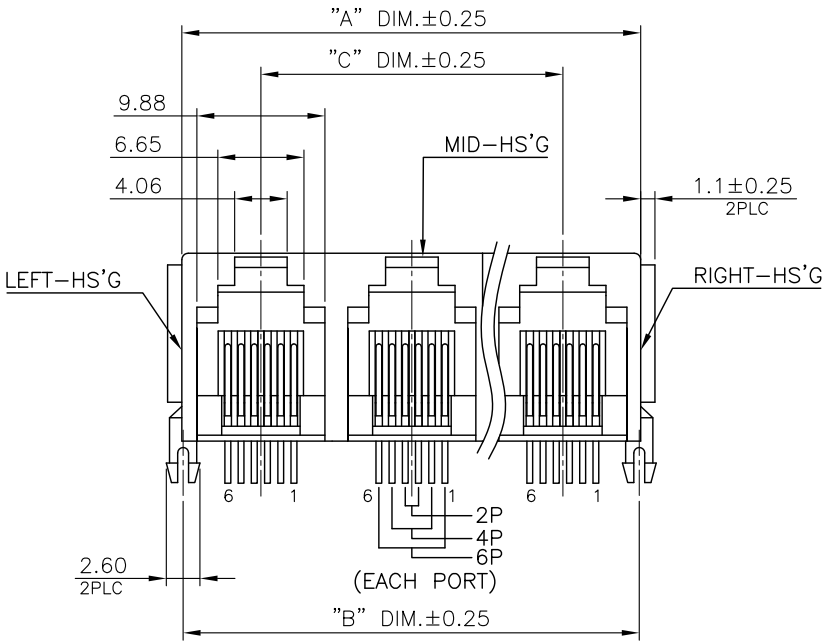

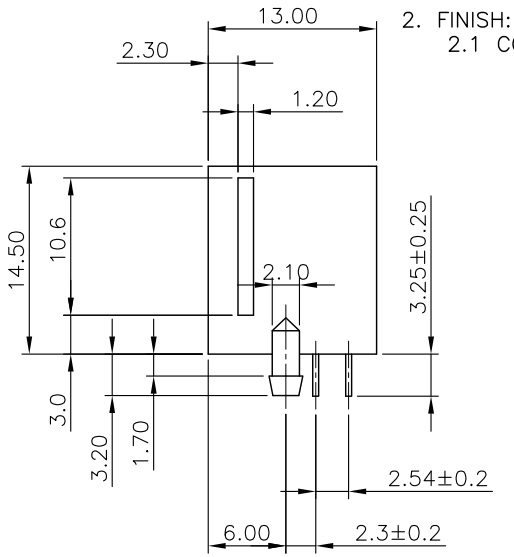

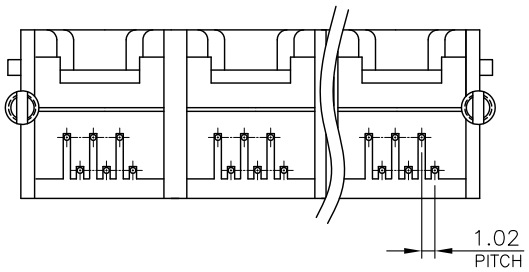

PORTS	"A" DIM.	"B" DIM.	"C" DIM.
2	23.9	23.6	11.65
3	35.55	35.25	23.3
4	47.2	46.9	34.95
5	58.85	58.55	46.6
6	70.5	70.2	58.25
7	82.15	81.85	69.9
8	93.8	93.5	81.55
9	105.45	105.15	93.2
10	117.1	116.8	104.85
11	128.75	128.45	116.5
12	140.4	140.1	128.15

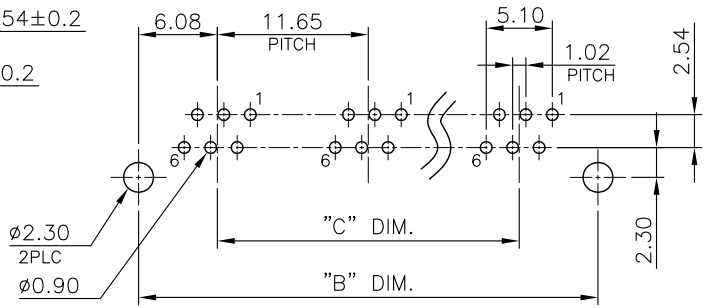

RECOMMENDED PCB LAYOUT
PCB THICKNESS: 1.6mm
TOLERANCE: ±0.05mm (TOP VIEW)

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ± 0.25
DATE		.XX ± 0.13
		.XXX ± 0.05
		ANG ±
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

MJ14Ax-xExx-0606-LF

- SERIES: 2:2 PORTS ⋮
- G:GRAY, K:BLACK
- EAR
- 6P6C
- 01:G/F, 06:06u"GOLD ⋮
- LEADFREE

DESCRIPTION: RJ11, GANGED JACK, MINI LOW PROFILE, SIDE ENTRY, FROM 2PORTS UP