
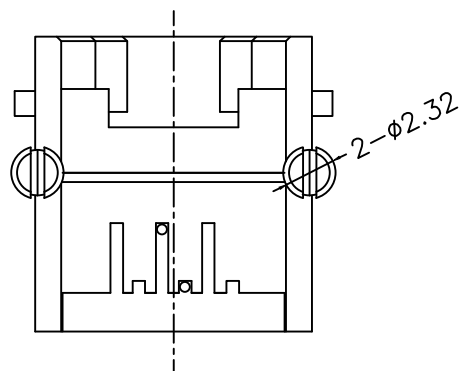
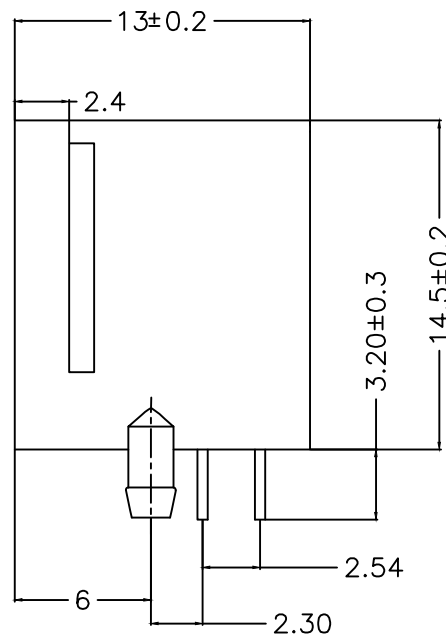


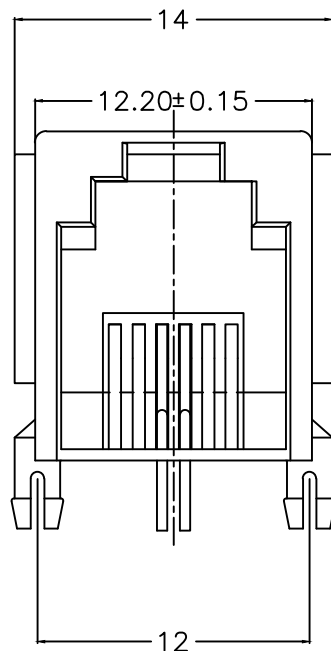

Electrical:

- 1.Voltage Rating:125 Vac Rms.
- 2.Current Rating:1.5 Amp.
- 3.Contact Resistance:30 Milliohms Max.
- 4.Insulation Resistance:500 Megohms Min @500 Vdc.
- 5.Dielectric Strength:1000 Vac Rms 50Hz, 1Min.

Mechanical:

- 1.Operating:750 Cycles Min.

Environmental:


- 1.Storage:-40°C To +85°C.
- 2.Operation:0°C To +70°C.

MATERIALS:

PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0.

CONTACTS: PHOSPHOR BRONZE

PLATING: GOLD PLATING OVER NICKEL IN CONTACT.
TIN PLATING OVER NICKEL IN SOLDER AREA.

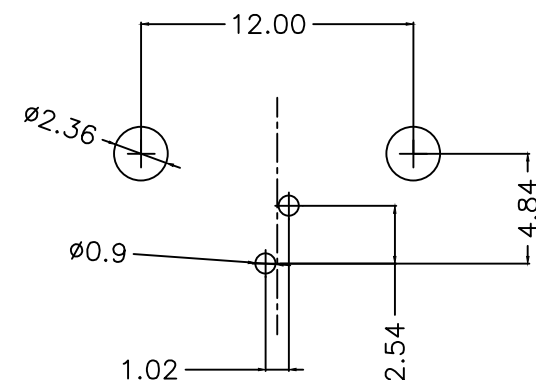

PC BOARD LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.38

UNIT / mm

SCALE 1 : 1

.XX ± 0.25

DATE

.XXX ± 0.10

ANG ± 3°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

MJ14S-GE15-0602-LF

SERIES

15u" GOLD

6P2C

LEADFREE

GRAY

EAR

DESCRIPTION: