


MATERIALS:

- HOUSING-DSM STANYL TE250F6 (NYLON-46)  
HEAT DEFLECTION TEMP.290°  
BLACK COLOR, UL94V-0
- CONTACTS & SHORTING BUSS-0.45mm DIA. ROUND PHOS-BRONZE  
PLATED WITH HARD GOLD.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS  
PART 68,SUBPART F.

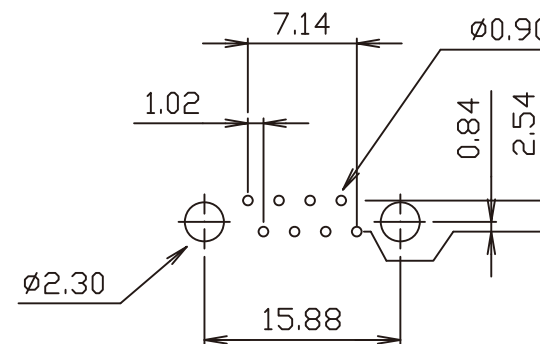

PC Board Layout  
Ref.

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm


SCALE 1:1

DATE

SIZE A4

P PROJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



ORDER INFORMATION

MJ21-KX06SB1458-0808-LF  
SERIES | LEADFREE  
| 8P8C  
| SHORTING BAR 1+4+5+8  
| 06u" GOLD  
| NON EAR  
| BLACK

DESCRIPTION: SIDE ENTRY PCB JACK 8POSITION