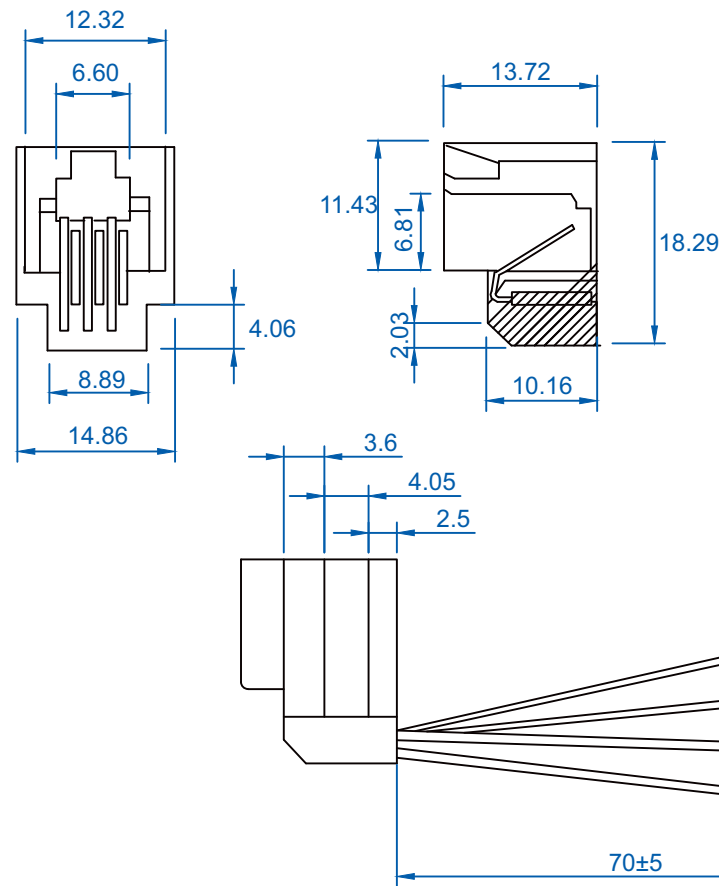


TECHNICAL DATA		
HOUSING	STANDARD -ABS RESIN ☐ UL94V-0 ☒ UL94V-2	COLOR ☐ GRAY ☐ WHITE
	☐ W/FLANGE ☐ W/O FLANGE	
CONTACT	☒ ROUND WIRE : 0.46mm DIAMETER PHOSPHOR BRONZE GOLD PLATED OVER NICAL.	
	☐ FLAT WIRE : 0.35mm THICKNESS PHOSPHOR BRONZE GOLD PLATED OVER NICAL.	
	TIN PLATED OVER NICKEL ON SOLDER AREA.	
GOLD-PLATING	☐ 0.0762um/3u inch ☒ 0.15um/6u inch ☐ 0.38um/15u inch ☐ 0.76um/30u inch ☐ 1.27um/50u inch	
WIRE	UL-1061 E41396 AWM80°C VW-1 300V 26AWG,PVC Insulation	
WIRE LEAD END STYLES	銅質Y端X2 銅質圓端X2	

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

MJ623K-060426RTYT-070-LF

SERIES 6P4C 26 AWG 70mm LEADFREE
R TERMINAL / Y TERMINAL

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.10
ANG ±