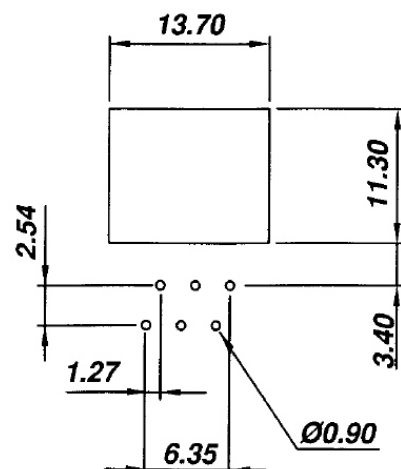

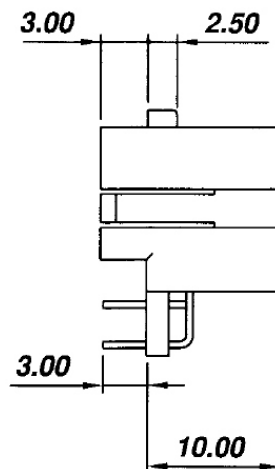
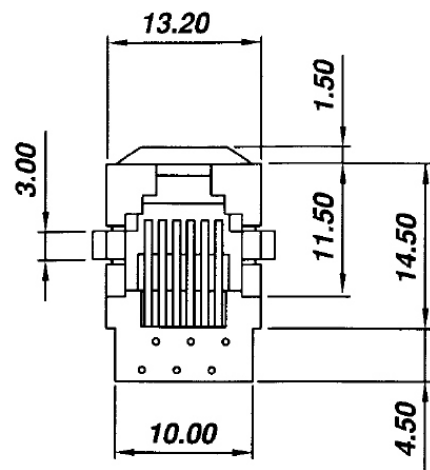


PCB LAYOUT
(Bottom View)

SPECIFICATION :

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.
Contact Resistance : 20milli-Ohm Max.
Rating Current : 1.5A Max.
Rating Voltage : 120V AC
Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

Housing : PBT Glass Filled (UL 94V-0)
Color : Black Color
Spring Wire : 0.45mm Dia. Phosphor Bronze
Gold Plating Over Nickel
Temperature Range : - 25 /+90 Deg C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MJB10-KX06-0606-LF
SERIES | | | LEADFREE
| | | 6P6C
| | | 06u" GOLD
| | | NON POST
| | | BLACK

DESCRIPTION: